


Data sheet | Item number: 787-1212

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage;
2.5 A output current; DC-OK LED

www.wago.com/787-1212

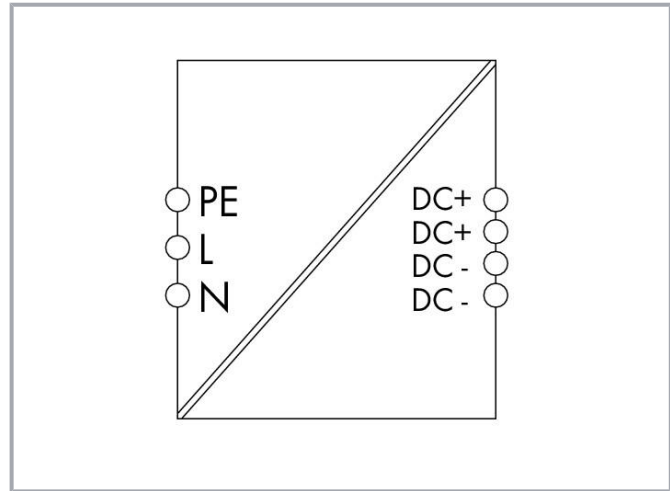

Item description

Features:

- Switched-mode power supply
- Stepped profile for installation in standard distribution boards
- Removable front panel and screw mounts for alternative installation in distribution boxes or devices
- Pluggable *picoMAX*[®] Connection Technology (tool-free)
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60335-1 and UL 60950-1; PELV per EN 60204

Data

Technical data

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Input

Phases	1
Nominal input voltage $U_{i\text{ nom}}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 85 ... 264 V; DC 125 ... 375 V
Input voltage derating	-2 %/V (< 100 VAC); -1.33 %/V (< 140 VDC)
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current I_i	$\leq 1.5\text{ A}$
Inrush current	$\leq 20\text{ A}$
Power factor	≥ 0.5
Power factor correction (PFC)	Passive
Mains failure hold-up time	$\geq 60\text{ ms}$

Output

Nominal output voltage $U_{o\text{ nom}}$	DC 24 V (SELV)
Output voltage range	DC 22 ... 26 V (adjustable)
Default setting	DC 24 V
Nominal output current $I_{o\text{ nom}}$	2.5 A; 2 A (< 110 VAC)
Nominal output power	60 W
Deviation	$\leq 1\%$
Deviation, dynamic load change 10 ... 90 %	$\leq 1\%$
Residual ripple	$\leq 100\text{ mV}$ (peak-to-peak)
Overload behavior	Constant power (in overload range: $1.05 \dots 1.35 \times I_{o\text{ nom}}$); Shutdown and automatic restart in the event of a short circuit or permanent overload

Signaling and communication

Signaling	1 x LED DC OK (green)
Operation status indicator	Green LED (U_o)

Efficiency/power losses

Power loss P_i	$\leq 0.6\text{ W}$
Power loss (max.) $P_{i\text{ (max.)}}$	9 W (100 VAC / 24 VDC; 2.5 A)
Efficiency (typ.)	89 % (230 VAC); 87 % (110 VAC)

Subject to changes. Please also observe the further product documentation!



Circuit protection

Internal fuse	T 2 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: 6 A (C characteristic), 10 A (B characteristic) or higher

Safety and protection

Protection class	I
Protection type	IP20; per EN 60529
Pollution degree	2
Transient suppression (primary)	Varistor
Overvoltage protection; secondary	≤ 31 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 500,000 h (per IEC 61709)

Connection data

Connection type 1	Input/Output
Connection technology	Push-in CAGE CLAMP®
WAGO connector	<i>picoMAX</i> ® 5.0, WAGO 2092 Series
Solid conductor	0.2 ... 2.5 mm² / 24 ... 12 AWG
Fine-stranded conductor	0.2 ... 2.5 mm² / 24 ... 12 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

Physical data

Width	72 mm / 2.835 inches
Height	90 mm / 3.543 inches
Depth	56 mm / 2.205 inches
Depth from upper-edge of DIN-rail	52.5 mm / 2.067 inches
Note (dimensions)	Depth: 48 mm (without cover)

Mechanical Data

Housing design	DIN-rail-mount enclosure
Mounting type	DIN-35 rail

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Screw mount (back/side)

Material data

Flammability class per UL94	V0
Fire load	0.243 MJ
Weight	288 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	95% (no condensation permissible)
Derating	-2.66 %/K (> 55 °C)
Climatic category	3K3 (per EN 60721; except for low air pressure)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61204-3 EN 60335-1 EN 62368-1 UL 60950-1 UL 508

Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
Recupel Type	
PU (SPU)	1 pcs
Packaging type	box
Country of origin	CN
GTIN	4055143908016
Customs tariff number	85044083900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Bulgaria)	c24db254-2b66-448b-b18e-27c1dc7ad507

Subject to changes. Please also observe the further product documentation!

SCIP notification number (Czech Republic)

973be624-07d3-4764-96b0-af72498ce892

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 004/2011, TP TC 020/2011	EAC RU C-DE.AM02.B.00089_19
	UL Underwriters Laboratories Inc.	UL 508	E255817
	UL Underwriters Laboratories Inc.	UL 60950-1	E255815

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
	UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Optional accessories

Tool

Operating tool		
	Item no.: 210-769 SCREWDRIVER; green	www.wago.com/210-769
	Item no.: 210-720 Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured	www.wago.com/210-720

Strain relief

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Strain relief plate



Item no.: 2092-1601

Gripping plate; for female and male connectors; 1 part; Pin spacing 5 mm; 3- to 4-pole; light gray

www.wago.com/2092-1601**Downloads****Documentation****Manual**

Product Manual COMPACT Power; 1-phase DC 24 V / 2.5 A	V 1.0.1 2021 Jan 21	pdf 1.6 MB	Download
--	------------------------	---------------	----------

Bid Text

787-1212 X81 - Datei	2019 Jul 4	xml 7.4 kB	Download
-------------------------	------------	---------------	----------

787-1212 docx - Datei	2019 Jun 12	docx 21.1 kB	Download
--------------------------	-------------	-----------------	----------

ausschreiben.de 787-1212		URL	Download
--------------------------	--	-----	----------

Instruction Leaflet

Primär getaktete Stromversorgungen COMPACT DC 24 V, 2,5 A		pdf 1.6 MB	Download
--	--	---------------	----------

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

CAD/CAE-Data**CAD data**

2D/3D Models 787-1212		URL	Download
-----------------------	--	-----	----------

CAE data

WSCAD Universe 787-1212		URL	Download
-------------------------	--	-----	----------

ZUKEN Portal 787-1212		URL	Download
-----------------------	--	-----	----------

Subject to changes. Please also observe the further product documentation!



EPLAN Data Portal 787-1212

[URL](#)

[Download](#)

Asset Administration Shell

Asset Administration Shell 787-1212

[URL](#)

[Download](#)

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-1212

[URL](#)

[Download](#)

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 2.5 A output current; DC-OK LED

Installation Notes

Product family

EPSITRON COMPACT Power

EPSITRON® COMPACT POWER: Compact, High-Performance Power Supplies

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.