
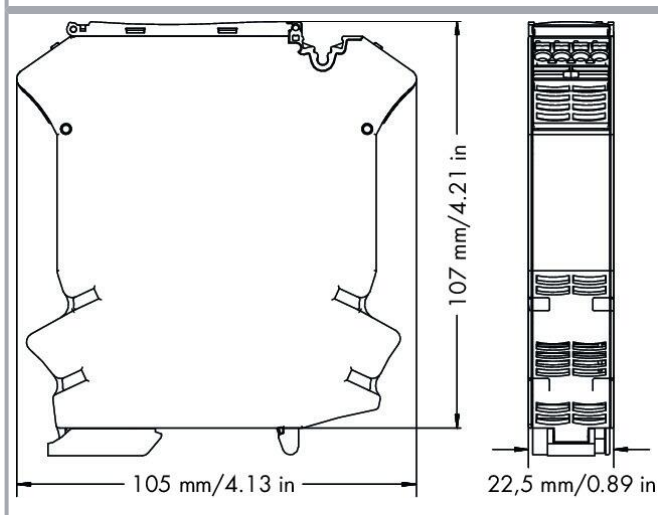
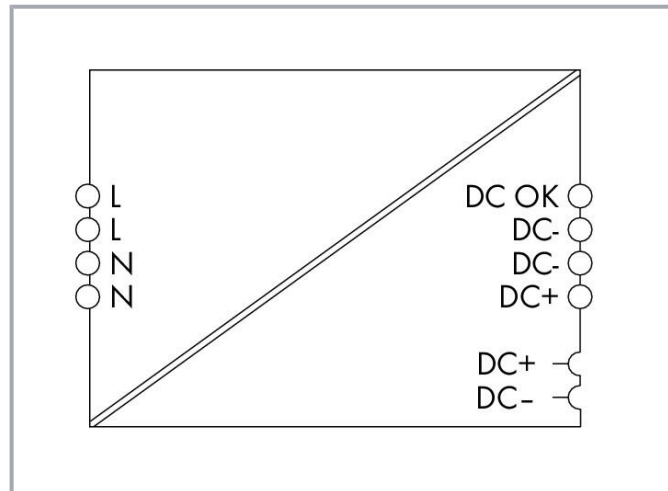


Data sheet | Item number: 787-2852

Switched-mode power supply; 1-phase; 24 VDC output voltage; 1 A output current

www.wago.com/787-2852

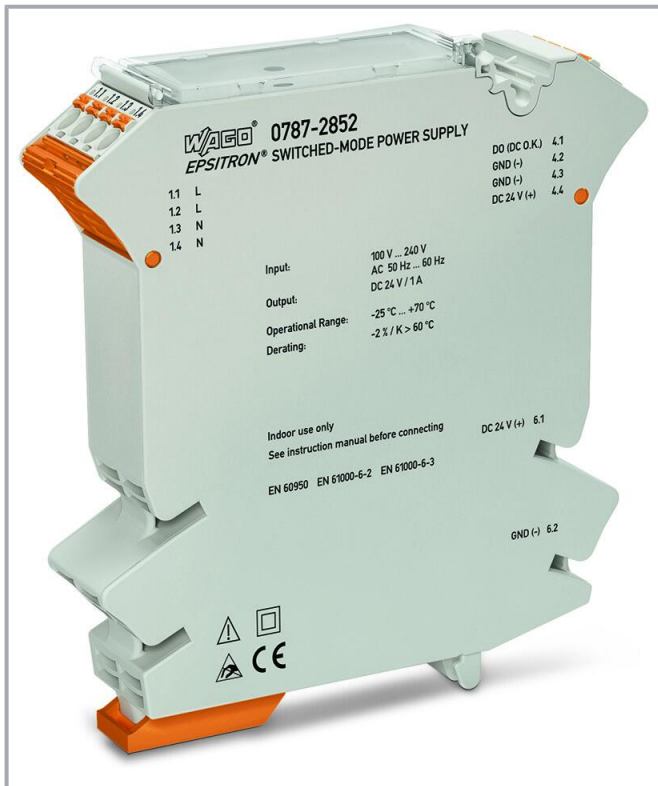

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

Features:

- Switched-mode power supply in 22.5 mm wide 2857 Series housing; device shares a common profile with the 2857 and 857 Series Signal Conditioners.
- Both 24 VDC and 0 V output voltage can be easily supplied to adjacent modules via 859-4xx Jumpers.
- Pluggable *picoMAX*[®] Connection Technology
- Natural convection cooling
- DC OK message as active signal output (24 VDC, 20 mA)
- Integrated redundancy diode enables easy fail-safe power supply via parallel connection of two power supplies.
- Approvals for worldwide applications

Data

Technical data

Input

Phases	1
Nominal input voltage $U_{i\text{ nom}}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 85 ... 264 V; DC 120 ... 372 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current I_i	≤ 0.28 A (240 VAC; Nominal load); ≤ 0.49 A (100 VAC; Nominal load)
Inrush current	≤ 30 A
Power factor	≥ 0.6 (230 VAC; Nominal load; per EN 61000-3-2)
Power factor correction (PFC)	None
Mains failure hold-up time	≥ 20 ms (100 VAC)

Output

Nominal output voltage $U_{o\text{ nom}}$	DC 24 V (SELV)
Default setting	DC 24 V
Nominal output current $I_{o\text{ nom}}$	1 A
Nominal output power	24 W
Deviation	≤ 2 %
Deviation, dynamic load change 10 ... 90 %	≤ 1 %
Residual ripple	≤ 100 mV (peak-to-peak)
Current limitation	$1.1 \times I_{o\text{ nom}}$ (typ.)
Overload behavior	Constant current

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Signaling and communication

Signaling	1 x LED DC OK (green) 1 x Overload LED (red)
Operation status indicator	Green LED ($U_o > 21.5 \text{ V}$) Red LED (overload)

Efficiency/power losses

Power loss P_l	$\leq 1 \text{ W}; \leq 4.3 \text{ W}$ (230 VAC; nominal load)
Power loss (max.) $P_{l(\text{max.})}$	5 W (100 VAC / 24 VDC; 1 A)
Efficiency (typ.)	86 % (230 VAC; nominal load); 84 % (110 VAC; nominal load)

Circuit protection

Internal fuse	T 2 A / 250 VAC
Backup fusing (recommended)	Circuit breaker: 6 A, 10 A, 16 A; Tripping characteristic: B or C

Safety and protection

Protection class	II
Protection type	IP20; per EN 60529
Pollution degree	2
Transient suppression (primary)	Varistor
Overvoltage protection; secondary	Internal protective circuit $\leq 29 \dots 31 \text{ VDC}$ (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes, for 2 devices of the same type
Series operation	Yes, for 2 devices of the same type
MTBF	$> 500,000 \text{ h}$ (at 25°C per IEC 61709)

Connection data

Number of jumper slots	4
Connection type 1	Input/Output/Signaling
Connection technology	Push-in CAGE CLAMP®
WAGO connector	<i>picoMAX</i> ® 5.0
Solid conductor	$0.2 \dots 2.5 \text{ mm}^2 / 24 \dots 10 \text{ AWG}$

Subject to changes. Please also observe the further product documentation!



Fine-stranded conductor	0.2 ... 2.5 mm ² / 24 ... 10 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

Physical data

Width	22.5 mm / 0.886 inches
Height from upper-edge of DIN-rail	107 mm / 4.213 inches
Depth	105 mm / 4.122 inches

Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Fire load	1.417 MJ
Weight	195 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C (Nominal mounting position; -25 ... +55 °C (in any mounting position))
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	-2 %/K (> 60 °C)
Climatic category	3K3 (per EN 60721)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61000-6-2 EN 61000-6-3 EN 60950-1 DNV
Standards/specifications (pending)	UL 60950 cULus 508 ANSI/ISA 12.12.01 (Class I Div. 2) ATEX/IEC Ex

Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01

Subject to changes. Please also observe the further product documentation!



ETIM 8.0	EC002540
ETIM 7.0	EC002540
Recupel Type	
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4055143295529
Customs tariff number	85044083900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 004/2011, TP TC 020/2011	EAC RU C-DE.AM02.B. 00089_19

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	DNV DNV Germany GmbH	DNV-CG-0339, Aug. 2021	TAA0000154

Optional accessories

Terminal blocks

Supply module

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 857-979**

Supply and through module

www.wago.com/857-979**Marking accessories****Marking strip****Item no.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

www.wago.com/2009-110**Marker****Item no.: 2009-115**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

www.wago.com/2009-115**Item no.: 793-501**

WMB marking card; as card; not stretchable; plain; snap-on type; white

www.wago.com/793-501**Item no.: 793-502**

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white

www.wago.com/793-502**Item no.: 793-503**

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white

www.wago.com/793-503**Item no.: 793-504**

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white

www.wago.com/793-504**Item no.: 793-505**

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white

www.wago.com/793-505**Item no.: 793-506**

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white

www.wago.com/793-506**Item no.: 793-566**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white

www.wago.com/793-566**Item no.: 793-5501**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

www.wago.com/793-5501**Item no.: 2009-141**

Micro-WSB-Inline; 2000 pieces on roll; plain; snap-on type; white

www.wago.com/2009-141**Tool****Operating tool**

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

www.wago.com/210-720**Jumpers**

Jumper

**Item no.: 281-482**

Jumper; 2-way; insulated; gray

www.wago.com/281-482**Item no.: 859-402/000-029**

Jumper; for jumper slot; 2-way; insulated; yellow

www.wago.com/859-402/000-029**Item no.: 859-402/000-006**

Jumper; for jumper slot; 2-way; insulated; blue

www.wago.com/859-402/000-006**Item no.: 859-402**

Jumper; for jumper slot; 2-way; insulated; light gray

www.wago.com/859-402**Item no.: 859-402/000-005**

Jumper; for jumper slot; 2-way; insulated; red

www.wago.com/859-402/000-005**Downloads****Documentation****Bid Text**

787-2852 doc - Datei	2016 Jan 6	doc 37.9 kB	Download
787-2852 X81 - Datei	2016 Jan 6	xml 6.7 kB	Download

Instruction Leaflet

Primär getaktete Stromversorgungen DC 24 V, 1 A		pdf 337.0 kB	Download
--	--	-----------------	----------

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

Subject to changes. Please also observe the further product documentation!



CAD/CAE-Data

CAD data

2D/3D Models 787-2852	URL	Download
-----------------------	-----	----------

CAE data

EPLAN Data Portal 787-2852	URL	Download
ZUKEN Portal 787-2852	URL	Download
WSCAD Universe 787-2852	URL	Download

Asset Administration Shell

Asset Administration Shell 787-2852	URL	Download
-------------------------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-2852 Switched-mode power supply; 1-phase; 24 VDC output voltage; 1 A output current	URL	Download
---	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!