


Data sheet | Item number: 790-145
Carrier rail; with special perforations; 1000 mm long; tin-plated; silver-colored



www.wago.com/790-145

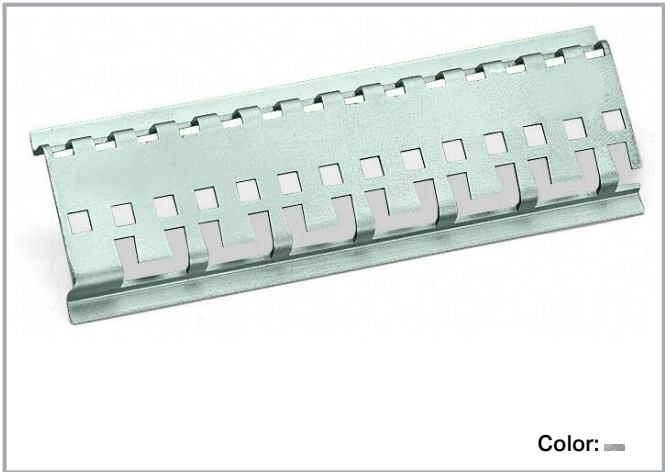

Data
Technical data

Main product function

Physical data

Width	1000 mm / 39.37 inches
-------	------------------------

Material data

Color	silver-colored
Weight	256 g

Commercial data

eCl@ss 10.0	27-40-06-02
eCl@ss 9.0	27-40-06-02
ETIM 8.0	EC001285
ETIM 7.0	EC001285
PU (SPU)	1 pcs
Packaging type	box
Country of origin	IT

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



GTIN	4045454701109
Customs tariff number	72169180000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Optional accessories**Shield termination**

Shield termination	
	Item no.: 790-144 Stand off; for carrier rail; suitable for M5 size screw; with special perforations
	www.wago.com/790-144

Downloads**Documentation****Bid Text**

790-145 X81 - Datei	2019 Feb 19	xml 2.6 kB	Download
790-145 doc - Datei	2017 Aug 31	doc 23.6 kB	Download

CAD/CAE-Data**CAE data**

WSCAD Universe 790-145	URL	Download
ZUKEN Portal 790-145	URL	Download
EPLAN Data Portal 790-145	URL	Download

CAD data

2D/3D Models 790-145	URL	Download
----------------------	-----	----------

Asset Administration Shell

Asset Administration Shell 790-145	URL	Download
------------------------------------	-----	----------

Subject to changes. Please also observe the further product documentation!

Environmental Product Compliance

Compliance Search


Environmental Product Compliance 790-145

[URL](#)


[Download](#)

Carrier rail; with special perforations; 1000 mm long; tin-plated; silver-colored


Installation Notes

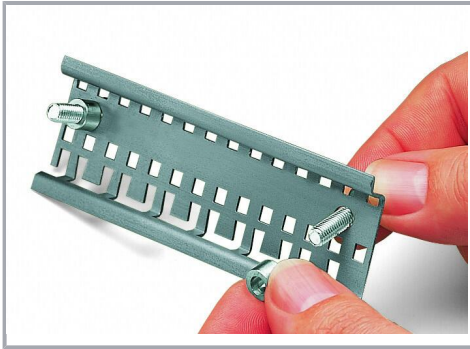

Securing a spacer sleeve to a specialty slotted DIN-rail.

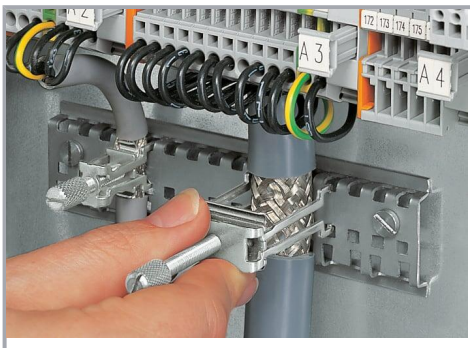

Securing an additional shield clamping saddle.

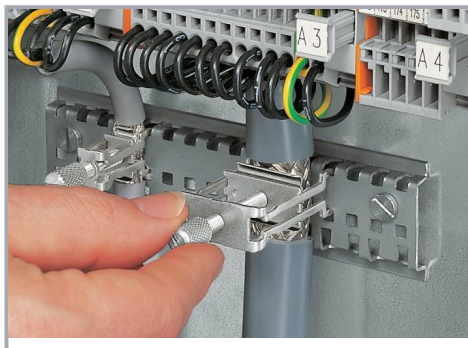

Tightening/removing a shield clamping saddle.

Subject to changes. Please also observe the further product documentation!



After connection, tighten the knurled screw to complete the installation.

Recommended tightening torque: 0.5 Nm



To remove the clamping saddle, unscrew until ratcheted mechanism is released, then slightly tip saddle and remove the clamping saddle.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.