

**Part Number :** 923151232


**Product Description :** Picoflex PF-50 IDT-to-Picoflex PF-50 IDT Off-the-Shelf (OTS) Cable Assembly, 320.00mm Length, Tin (Sn) Plating, 12 Circuits

**Series Number :** 92315

**Status :** Active

**Product Category :** Power and Signal Cable Assemblies

**Engineering Number :** 0923151232

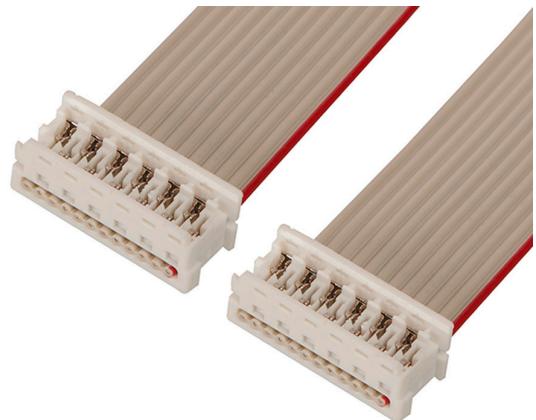

---

## Documents & Resources

### Drawings

[Drawing 923151232\\_sd.pdf](#)

### 3D Models and Design Files

[3D Model 923151232\\_stp.zip](#)

### Specifications

[Application Specification 908140000-AS-000.pdf](#)

[Product Specification PS-99020-0011-001.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS

- REACH SVHC

- Low-Halogen

#### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

#### EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	Power and Signal Cable Assemblies
Series	92315
Description	Picoflex PF-50 IDT-to-Picoflex PF-50 IDT Off-the-Shelf (OTS) Cable Assembly, 320.00mm Length, Tin (Sn) Plating, 12 Circuits
Assembly Configuration	Dual Ended Connectors
Connector to Connector	Picoflex IDT-to-IDT
Product Family	Picoflex Ribbon-Cable Connectors
Product Name	Picoflex
Type	Ribbon Cable Assembly
UPC	193264715190

#### Electrical

Current - Maximum per Contact	1.2A
Voltage - Maximum	250V

#### Physical

Cable Length	320.00mm
Circuits (Loaded)	12
Circuits (maximum)	12
Gender	Female-Female
Lock to Mating Part	None
Material - Metal	Phosphor Bronze

Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	1.794/g
Number of Rows	2
Packaging Type	Bag
Pitch - Mating Interface	1.27mm
Plating min - Mating	2.032µm
Plating min - Termination	2.032µm
Single Ended	No
Termination Interface Style	IDT or Pierce
Wire/Cable Type	PVC, Ribbon Cable
Wire Size (AWG)	28

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
Picoflex PF-50 Vertical Low Profile Headers	<u>90325</u>
Picoflex PF-50 Vertical Low Profile Headers	<u>90779</u>
Picoflex PF-50 Vertical Surface Mount Headers	<u>90814</u>

---

## Application Tooling

### Global

Description	Part Number
Extractor Tool for Connectors	<u>0621006000</u>