


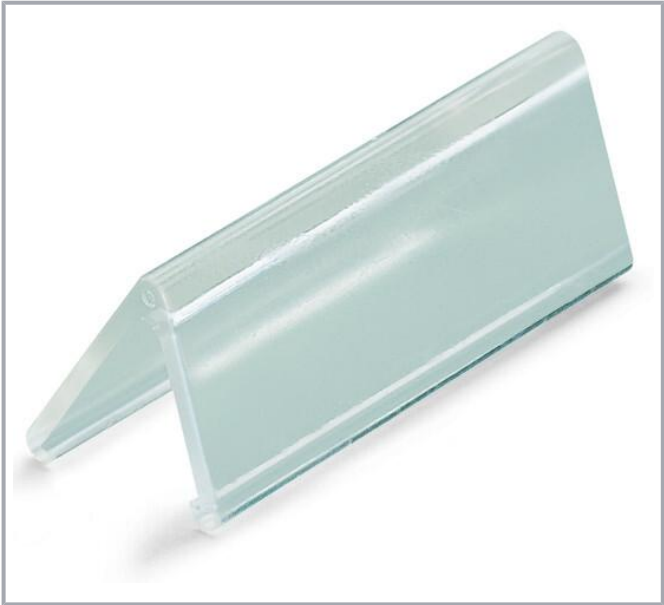

Data

Material data

Note (material data)

Information on material specifications can be found [here](#)

Color	transparent
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.106 MJ
Weight	3.1 g

Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

**Commercial data**

Product Group	1 (Rail Mounted Terminal Blocks)
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	50 (10) pcs
Packaging type	box
Country of origin	DE
GTIN	4045454636289
Customs tariff number	39269097900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads**Documentation****Bid Text**

282-886	2019 Feb 19	xml	Download
X81 - Datei		2.6 kB	

282-886	2017 Mar 3	doc	Download
doc - Datei		24.1 kB	

Additional Information

		pdf	Download
		2.3 MB	

CAD/CAE-Data**CAE data**

WSCAD Universe 282-886	URL	Download
------------------------	-----	----------

CAD data

2D/3D Models 282-886	URL	Download
----------------------	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Asset Administration Shell

Asset Administration Shell 282-886	URL	Download
------------------------------------	-----	----------


Environmental Product Compliance

Compliance Search

Environmental Product Compliance 282-886	URL	Download
Locking cover; mechanically locks multiple links; 6-pole; transparent		

Installation Notes

Locking system

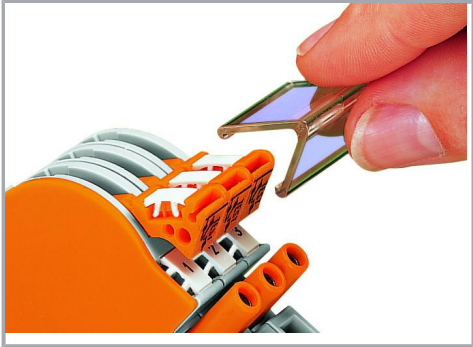

Snapping transparent locking cover onto 1–8 disconnect links:
a) Mechanically lock several links for multi-pole switching applications
b) Protect markers



Snapping transparent locking cover onto 1–8 disconnect links:
a) Mechanically lock several links for multi-pole switching applications
b) Protect markers

Subject to changes. Please also observe the further product documentation!