



Data

Material data

Note (material data)	Information on material specifications can be found here
Color	transparent
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.139 MJ
Weight	4.6 g

Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Commercial data

Product Group	1 (Rail Mounted Terminal Blocks)
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	50 (10) pcs
Packaging type	box
Country of origin	DE
GTIN	4045454636319
Customs tariff number	39269097900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Documentation

Bid Text

282-888	2019 Feb 19	xml	Download
X81 - Datei		2.6 kB	
282-888	2017 Mar 3	doc	Download
doc - Datei		24.1 kB	

Additional Information

	pdf	Download
	2.3 MB	

CAD/CAE-Data

CAE data

WSCAD Universe 282-888	URL	Download
------------------------	-----	----------

CAD data

2D/3D Models 282-888	URL	Download
----------------------	-----	----------

Asset Administration Shell

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Asset Administration Shell 282-888	URL	Download
------------------------------------	-----	----------


Environmental Product Compliance

Compliance Search

Environmental Product Compliance 282-888	URL	Download
Locking cover; mechanically locks multiple links; 8-pole; transparent		

Installation Notes

Locking system

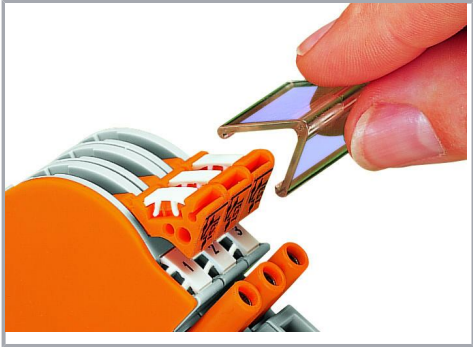

Snapping transparent locking cover onto 1–8 disconnect links:
a) Mechanically lock several links for multi-pole switching applications
b) Protect markers



Snapping transparent locking cover onto 1–8 disconnect links:
a) Mechanically lock several links for multi-pole switching applications
b) Protect markers

Subject to changes. Please also observe the further product documentation!