



Data
Technical data

Number of spacings	1 -way
--------------------	--------

Physical data

Depth	18.75 mm / 0.74 inches
Pin spacing	2.5 mm

Mechanical Data

Suitable	for male and female connectors with CAGE CLAMP® connection
----------	--

Material data

Color	white
Material group	I

Subject to changes. Please also observe the further product documentation!



Insulation material	Glass fiber-reinforced polyamide (PA66 GF)
Flammability class per UL94	HB
Fire load	0.006 MJ
Weight	0.2 g

Commercial data

Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-44-04-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	100 (25) pcs
Packaging type	box
Country of origin	DE
GTIN	4045454830052
Customs tariff number	82055980000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	96/20035 (E5)

Downloads

CAD/CAE-Data

CAD data

2D/3D Models 733-130	URL	Download
----------------------	-----	----------

CAE data

ZUKEN Portal 733-130	URL	Download
----------------------	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Asset Administration Shell


Asset Administration Shell 733-130	URL	Download
------------------------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 733-130	URL	Download
Operating tool; made of insulating material; 1-way; loose; white		

Installation Notes

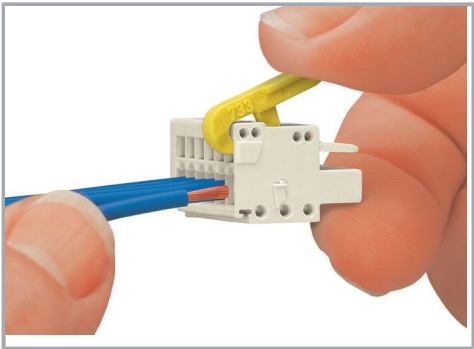

Conductor termination via operating tool (733-191)

Subject to changes. Please also observe the further product documentation!