


**Data sheet | Item number: 734-228**

Strain relief plate; for female and male connectors; 12.5 mm wide; 1 part; Pin spacing 3.81 mm; orange

[www.wago.com/734-228](http://www.wago.com/734-228)



Color:

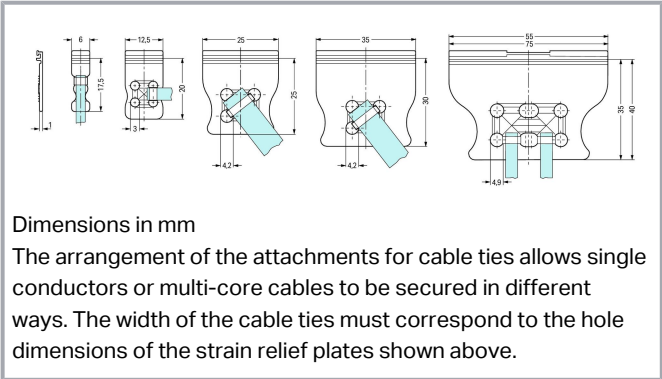

## Material data

Note (material data)

Information on material specifications can be found here

Color	orange
Fire load	0.008 MJ
Weight	0.3 g

## Commercial data

Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-44-04-92
eCl@ss 9.0	27-44-04-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	100 (25) pcs
Packaging type	box
Country of origin	DE
GTIN	4017332404914
Customs tariff number	85389099990


## Environmental Product Compliance

RoHS Compliance Status

Compliant, No Exemption

## Approvals / Certificates

### Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	96/20035 (E5)

## Downloads

### Documentation

#### Additional Information

2019 Apr 3

pdf  
2.1 MB

Download

Subject to changes. Please also observe the further product documentation!



CAD/CAE-Data

CAD data

2D/3D Models 734-228	URL	Download
----------------------	-----	----------

CAE data

ZUKEN Portal 734-228	URL	Download
----------------------	-----	----------

Asset Administration Shell

Asset Administration Shell 734-228	URL	Download
------------------------------------	-----	----------


Environmental Product Compliance

Compliance Search

Environmental Product Compliance 734-228	URL	Download
Strain relief plate; for female and male connectors; 12.5 mm wide; 1 part; Pin spacing 3.81 mm; orange		

Installation Notes


Installation

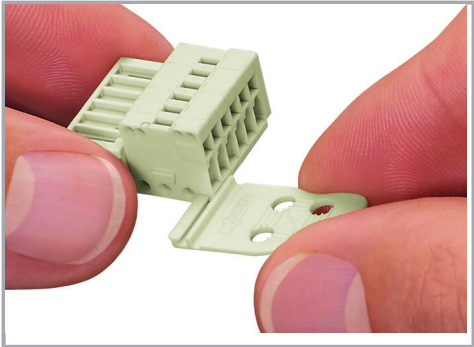

Strain relief plates for factory or in-the-field assembly

Application

Subject to changes. Please also observe the further product documentation!

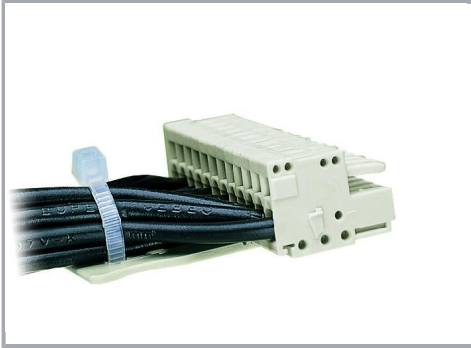

Strain relief plate, for factory assembly  
1-conductor female connector, 2.5 mm pin  
spacing, light gray,  
12-pole, with strain relief plate  
733-112/034-000

#### Application



Strain relief plate, for factory assembly  
1-conductor female connector, 2.5 mm pin  
spacing, light gray,  
2-pole, with strain relief plate (733-102/032-  
000)

Subject to changes. Please also observe the further product documentation!