




Picture differs from the item.

Color: ■

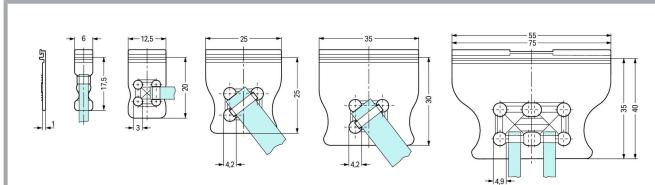

Dimensions in mm

The arrangement of the attachments for cable ties allows single conductors or multi-core cables to be secured in different ways. The width of the cable ties must correspond to the hole dimensions of the strain relief plates shown above.

Data

Physical data

Width	12.5 mm / 0.492 inches
Height	1.87 mm / 0.074 inches
Depth	22 mm / 0.866 inches

Mechanical Data

Suitable	for standard male and female connectors (2.5 mm; 3.5 mm; 5 mm; 7.5 mm pin spacing)
----------	--

Material data

Note (material data)

Information on material specifications can be found here

Subject to changes. Please also observe the further product documentation!

Color	gray
Fire load	0.008 MJ
Weight	0.3 g

Commercial data

Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-44-04-92
eCl@ss 9.0	27-44-04-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	100 (25) pcs
Packaging type	box
Country of origin	DE
GTIN	4017332650335
Customs tariff number	85389099990

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	LR Lloyds Register	IEC 61984	96/20035 (E5)

Downloads

Documentation

Bid Text

734-328	2019 Feb 19	xml	Download
X81 - Datei		2.6 kB	
734-328	2017 Apr 27	doc	Download
doc - Datei		24.1 kB	

Subject to changes. Please also observe the further product documentation!

Additional Information

2019 Apr 3

pdf
2.1 MB

[Download](#)

CAD/CAE-Data

CAD data

2D/3D Models 734-328

[URL](#) [Download](#)

CAE data

ZUKEN Portal 734-328

[URL](#) [Download](#)

Asset Administration Shell

Asset Administration Shell 734-328

[URL](#) [Download](#)

Environmental Product Compliance

Compliance Search


Environmental Product Compliance 734-328

[URL](#) [Download](#)

Strain relief plate; for female and male connectors; 12.5 mm wide; 1 part; gray

Installation Notes


Installation

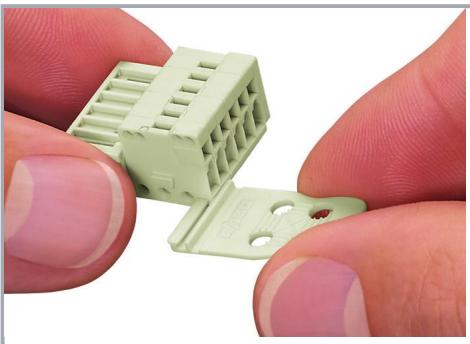

Strain relief plates for factory or in-the-field assembly

Application

Subject to changes. Please also observe the further product documentation!

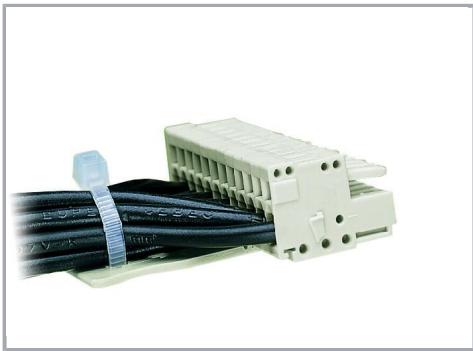


Strain relief plate, for factory assembly

1-conductor female connector, 2.5 mm pin spacing, light gray,

12-pole, with strain relief plate

733-112/034-000

Application

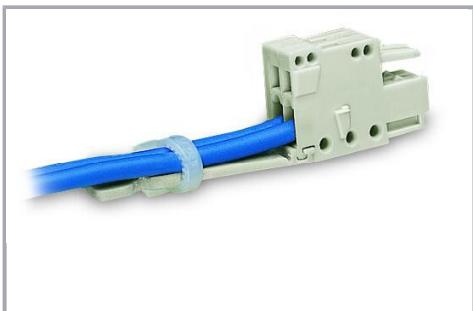

Strain relief plate, for factory assembly

1-conductor female connector, 2.5 mm pin spacing, light gray,

2-pole, with strain relief plate (733-102/032-000)

Subject to changes. Please also observe the further product documentation!