

## Data sheet | Item number: 745-395

Jumper; 5-way; unplated; silver-colored

[www.wago.com/745-395](http://www.wago.com/745-395)



### Data

#### Electrical data

#### Ratings per IEC/EN

|               |      |
|---------------|------|
| Rated current | 41 A |
|---------------|------|

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Physical data

|                   |                      |
|-------------------|----------------------|
| Pin spacing       | 10 mm / 0.394 inches |
| Jumper assignment | 1-2-3-4-5            |

## Mechanical Data

|          |   |
|----------|---|
| Suitable | for 745 Series (6 mm <sup>2</sup> ) and 2706 Series |
|----------|---|

## Material data

|                      |  |
|----------------------|--|
| Note (material data) | Information on material specifications can be found here |
| Color                | silver-colored   |
| Contact material     | Copper alloy   |
| Contact plating      | Tin  |
| Weight               | 4.9 g  |

## Commercial data

|                       |                                |
|-----------------------|--------------------------------|
| Product Group         | 4 (Printed Circuit Connectors) |
| eCl@ss 10.0           | 27-14-11-40                    |
| eCl@ss 9.0            | 27-44-04-92                    |
| ETIM 8.0              | EC000489                       |
| ETIM 7.0              | EC000489                       |
| PU (SPU)              | 200 (50) pcs                   |
| Packaging type        | box                            |
| Country of origin     | CH                             |
| GTIN                  | 4017332608497                  |
| Customs tariff number | 85366990990                    |

## Environmental Product Compliance

|                        |                         |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

## Downloads

### Documentation

#### Additional Information

|            |               |          |
|------------|---------------|----------|
| 2019 Apr 3 | pdf<br>2.1 MB | Download |
|------------|---------------|----------|

Subject to changes. Please also observe the further product documentation!



CAD/CAE-Data

CAD data

|                      |     |          |
|----------------------|-----|----------|
| 2D/3D Models 745-395 | URL | Download |
|----------------------|-----|----------|

CAE data

|                      |     |          |
|----------------------|-----|----------|
| ZUKEN Portal 745-395 | URL | Download |
|----------------------|-----|----------|

Asset Administration Shell


|                                    |     |          |
|------------------------------------|-----|----------|
| Asset Administration Shell 745-395 | URL | Download |
|------------------------------------|-----|----------|

Environmental Product Compliance


Compliance Search

|   |     |          |
|---|-----|----------|
| Environmental Product Compliance 745-395<br>Jumper; 5-way; unplated; silver-colored | URL | Download |
|---|-----|----------|

Installation Notes

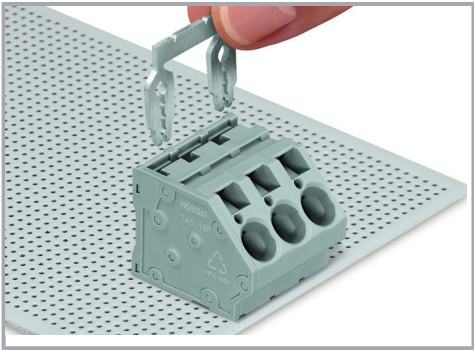


Inserting a comb-style jumper bar.

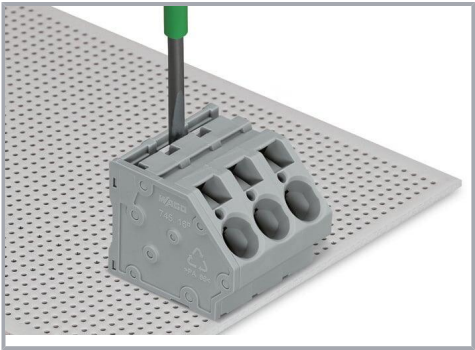

To insert a comb-style jumper bar, push it down using a screwdriver until it hits the backstop – 745 Series.

Subject to changes. Please also observe the further product documentation!

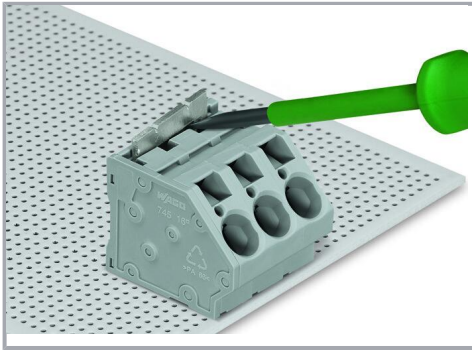

To remove the jumper bar, lift it up using a screwdriver – 745 Series.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.