

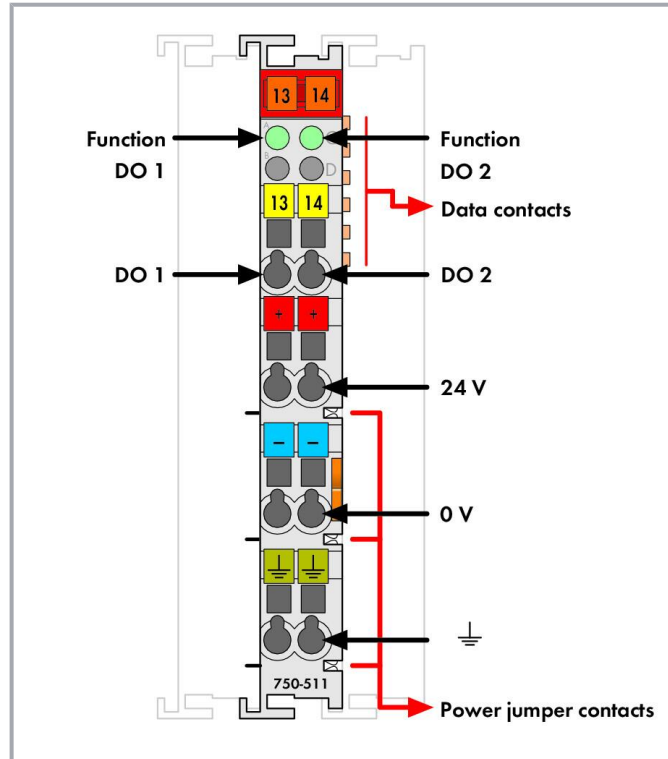
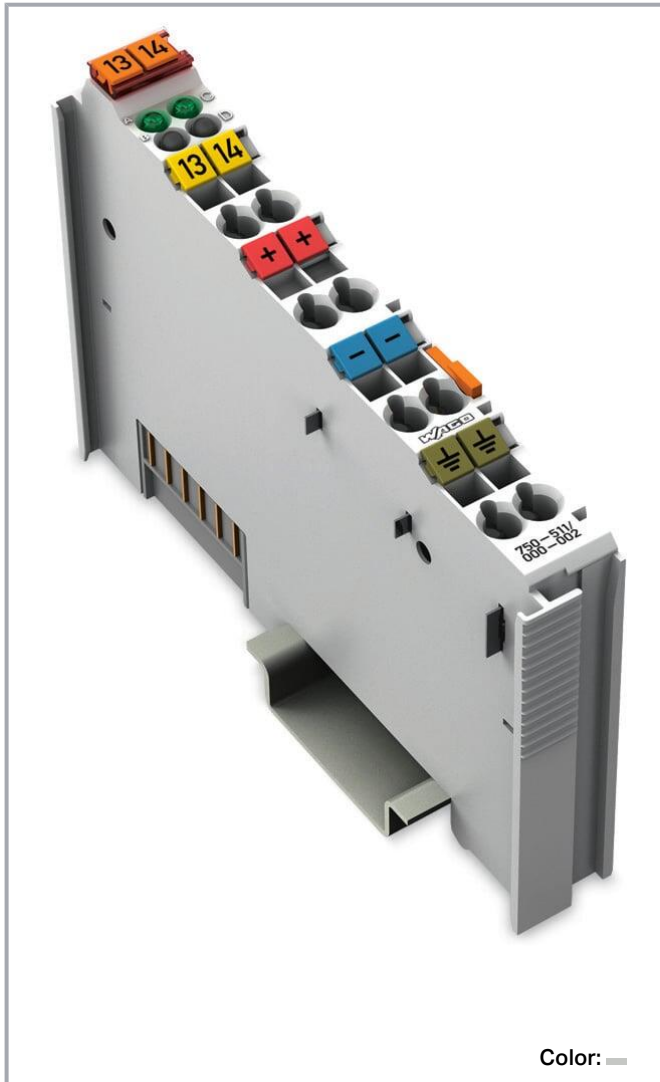


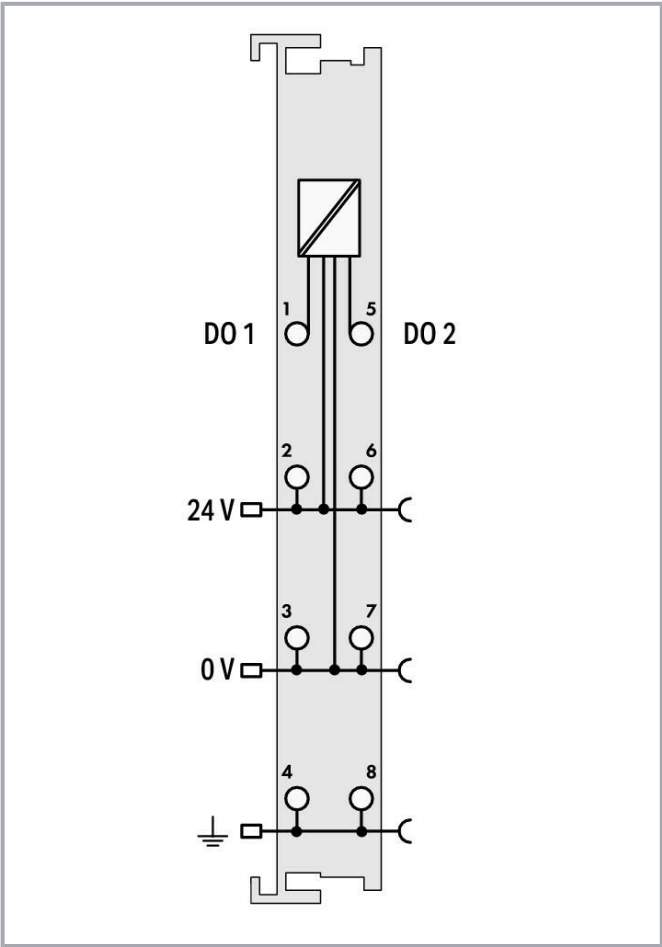

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

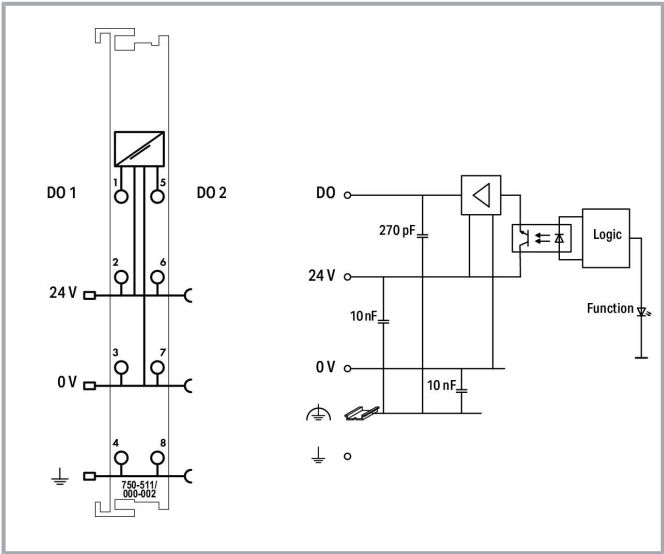

Item description

This output module modulates a 16-bit information in the pulse width. The field side is electrically isolated from the bus system.

The pulse duty factor is given by a 16-bit value.

The outputs are short-circuit-protected.

Data  
Technical data

|                            |                         |
|----------------------------|-------------------------|
| Number of digital outputs  | 2                       |
| Output current per channel | 0.1 A                   |
| Output current             | short-circuit-protected |
| Load type                  | resistive, inductive    |
| Resolution [bit]           | 10 bits                 |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                                                                  |                                                                                                                                                      |
|------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pulse frequency                                                  | 100 Hz                                                                                                                                               |
| Duty cycle                                                       | 0 ... 100 %                                                                                                                                          |
| Data width                                                       | 2 x 16-bit data; 2 x 8-bit control/status                                                                                                            |
| Supply voltage (system)                                          | 5 VDC; via data contacts                                                                                                                             |
| Current consumption (5 V system supply)                          | 70 mA                                                                                                                                                |
| Supply voltage (field)                                           | 24 VDC (-15 ... +20 %); via power jumper contacts (power supply via blade contact; transmission (supply voltage field side only) via spring contact) |
| Current consumption, field supply (module with no external load) | 15 mA                                                                                                                                                |
| Isolation                                                        | 500 V system/field                                                                                                                                   |
| Indicators                                                       | LED (A, C) green: Function DO 1, DO 2                                                                                                                |
| Number of incoming power jumper contacts                         | 3                                                                                                                                                    |
| Number of outgoing power jumper contacts                         | 3                                                                                                                                                    |

### Connection data

|                                       |                                   |
|---------------------------------------|-----------------------------------|
| Connection technology: inputs/outputs | 8 x CAGE CLAMP®                   |
| Connection type 1                     | Inputs/Outputs                    |
| Solid conductor                       | 0.08 ... 2.5 mm² / 28 ... 14 AWG  |
| Fine-stranded conductor               | 0.08 ... 2.5 mm² / 28 ... 14 AWG  |
| Strip length                          | 8 ... 9 mm / 0.31 ... 0.35 inches |

### Physical data

|                                   |                        |
|-----------------------------------|------------------------|
| Width                             | 12 mm / 0.472 inches   |
| Height                            | 100 mm / 3.937 inches  |
| Depth                             | 69.8 mm / 2.748 inches |
| Depth from upper-edge of DIN-rail | 62.6 mm / 2.465 inches |

### Mechanical Data

|               |             |
|---------------|-------------|
| Mounting type | DIN-35 rail |
|---------------|-------------|

### Material data

|                    |                              |
|--------------------|------------------------------|
| Color              | light gray                   |
| Housing material   | Polycarbonate; polyamide 6.6 |
| Fire load          | 0.085 MJ                     |
| Weight             | 53.5 g                       |
| Conformity marking | CE                           |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Environmental requirements

|                                                                                    |                                       |
|------------------------------------------------------------------------------------|---------------------------------------|
| Ambient temperature (operation)                                                    | 0 ... +55 °C                          |
| Ambient temperature (storage)                                                      | -40 ... +85 °C                        |
| Protection type                                                                    | IP20                                  |
| Pollution degree                                                                   | 2 per IEC 61131-2                     |
| Operating altitude                                                                 | 0 ... 2000 m / 0 ... 6562 ft          |
| Mounting position                                                                  | horizontal (standing/lying); vertical |
| Relative humidity (without condensation)                                           | 95 %                                  |
| Vibration resistance                                                               | per IEC 60068-2-6                     |
| Shock resistance                                                                   | 15g per IEC 60068-2-27                |
| EMC immunity to interference                                                       | per EN 61000-6-2                      |
| EMC emission of interference                                                       | per EN 61000-6-4                      |
| Exposure to pollutants                                                             | Per IEC 60068-2-42 and IEC 60068-2-43 |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                |

## Commercial data

|                       |                 |
|-----------------------|-----------------|
| Product Group         | 15 (I/O System) |
| eCl@ss 10.0           | 27-24-26-05     |
| eCl@ss 9.0            | 27-24-26-05     |
| ETIM 8.0              | EC001601        |
| ETIM 7.0              | EC001601        |
| Recupel Type          |                 |
| PU (SPU)              | 1 pcs           |
| Packaging type        | box             |
| Country of origin     | DE              |
| GTIN                  | 4045454831608   |
| Customs tariff number | 85371098990     |

## Environmental Product Compliance

|                        |                         |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

## Approvals / Certificates

### General approvals

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



| Logo | Approval                                                            | Additional Approval Text | Certificate name             |
|------|---------------------------------------------------------------------|--------------------------|------------------------------|
|      | <b>EAC</b><br>Brjansker Zertifizierungsstelle                       | TP TC 020/2011           | EAC RU C-DE.AM02.B.00087 /19 |
|      | <b>KC</b><br>National Radio Research Agency                         | Article 58-2, Clause 3   | MSIP-REM-W43-PWM750          |
|      | <b>UL</b><br>UL International Netherlands B.V. (ORDINARY LOCATIONS) | UL 508                   | E175199 Sec.1                |

## Declarations of conformity and manufacturer's declarations

| Logo | Approval                                                  | Additional Approval Text | Certificate name |
|------|-----------------------------------------------------------|--------------------------|------------------|
|      | <b>EU-Declaration of Conformity</b><br>WAGO GmbH & Co. KG | -                        | -                |

## Approvals for hazardous areas

| Logo | Approval                                        | Additional Approval Text | Certificate name                                  |
|------|-------------------------------------------------|--------------------------|---------------------------------------------------|
|      | <b>ATEX</b><br>TUEV Nord Cert GmbH              | EN 60079-0               | TUEV14ATEX148929X (II 3 G Ex ec IIC T4 Gc)        |
|      | <b>CCCEX</b><br>CQST/CNEx                       | CNCA-C23-01              | 2020312310000213 (Ex ec IIC T4 Gc)                |
|      | <b>EAC</b><br>Brjansker Zertifizierungsstelle   | TP TC 012/2011           | EAC RU C-DE.AM02.B.00163 /19 (2Ex nA IIC T4 Gc X) |
|      | <b>IECEx</b><br>TUEV Nord Cert GmbH             | IEC 60079-0              | IECEx TUN 14.0035 X (Ex ec IIC T4 Gc)             |
|      | <b>INMETRO</b><br>TÜV Rheinland do Brasil Ltda. | IEC 60079-0              | BR-Ex_TÜV 12.1297 X                               |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



DEKRA 8505



UKEX

UKEx

WAGO GmbH &amp; Co. KG

EN 60079-0

UKCA\_WAGO22UKEX003X\_ec



UL

Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS)

UL 121201

E198726 Sec.1

## Optional accessories

### Marking accessories

Marker carrier

**Item no.: 750-103**  
Group marker carrier[www.wago.com/750-103](http://www.wago.com/750-103)

Marker

**Item no.: 2009-145/000-006**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

[www.wago.com/2009-145/000-006](http://www.wago.com/2009-145/000-006)**Item no.: 2009-145**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-145](http://www.wago.com/2009-145)**Item no.: 2009-145/000-002**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

[www.wago.com/2009-145/000-002](http://www.wago.com/2009-145/000-002)**Item no.: 2009-145/000-007**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[www.wago.com/2009-145/000-007](http://www.wago.com/2009-145/000-007)**Item no.: 2009-145/000-005**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

[www.wago.com/2009-145/000-005](http://www.wago.com/2009-145/000-005)**Item no.: 2009-145/000-012**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

[www.wago.com/2009-145/000-012](http://www.wago.com/2009-145/000-012)**Item no.: 2009-145/000-023**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

[www.wago.com/2009-145/000-023](http://www.wago.com/2009-145/000-023)**Item no.: 2009-145/000-024**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/2009-145/000-024](http://www.wago.com/2009-145/000-024)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



**Item no.: 248-501/000-006**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

[www.wago.com/248-501/000-006](http://www.wago.com/248-501/000-006)



**Item no.: 248-501/000-007**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray

[www.wago.com/248-501/000-007](http://www.wago.com/248-501/000-007)



**Item no.: 248-501/000-002**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

[www.wago.com/248-501/000-002](http://www.wago.com/248-501/000-002)



**Item no.: 248-501/000-012**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

[www.wago.com/248-501/000-012](http://www.wago.com/248-501/000-012)



**Item no.: 248-501**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/248-501](http://www.wago.com/248-501)



**Item no.: 248-501/000-017**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/248-501/000-017](http://www.wago.com/248-501/000-017)



**Item no.: 248-501/000-005**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/248-501/000-005](http://www.wago.com/248-501/000-005)



**Item no.: 248-501/000-024**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/248-501/000-024](http://www.wago.com/248-501/000-024)



**Item no.: 248-501/000-023**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/248-501/000-023](http://www.wago.com/248-501/000-023)



**Item no.: 750-100**

Marker card; as a DIN A4 sheet; plain

[www.wago.com/750-100](http://www.wago.com/750-100)

Group marker carrier



**Item no.: 750-106**

Group marker carrier

[www.wago.com/750-106](http://www.wago.com/750-106)

## Shield termination

Shield clamping saddles



**Item no.: 790-116**

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm

[www.wago.com/790-116](http://www.wago.com/790-116)**Item no.: 790-124**

Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm

[www.wago.com/790-124](http://www.wago.com/790-124)**Item no.: 790-108**

Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm

[www.wago.com/790-108](http://www.wago.com/790-108)**Item no.: 790-140**

Shield clamping saddle; diameter of compatible conductor

[www.wago.com/790-140](http://www.wago.com/790-140)**Item no.: 790-216**

Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm

[www.wago.com/790-216](http://www.wago.com/790-216)**Item no.: 790-220**

Shield clamping saddle; 30 mm wide; 6 ... 20 mm

[www.wago.com/790-220](http://www.wago.com/790-220)**Item no.: 790-208**

Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm

[www.wago.com/790-208](http://www.wago.com/790-208)**System housing**

## System enclosure

**Item no.: 850-814/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate

[www.wago.com/850-814/002-000](http://www.wago.com/850-814/002-000)**Item no.: 850-815/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate

[www.wago.com/850-815/002-000](http://www.wago.com/850-815/002-000)**Item no.: 850-816/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate

[www.wago.com/850-816/002-000](http://www.wago.com/850-816/002-000)**Item no.: 850-817/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate

[www.wago.com/850-817/002-000](http://www.wago.com/850-817/002-000)**Item no.: 850-825**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20

[www.wago.com/850-825](http://www.wago.com/850-825)**Item no.: 850-826**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826](http://www.wago.com/850-826)**Item no.: 850-827**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827](http://www.wago.com/850-827)**Item no.: 850-827/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827/002-000](http://www.wago.com/850-827/002-000)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



**Item no.: 850-826/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826/002-000](http://www.wago.com/850-826/002-000)**Item no.: 850-828/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828/002-000](http://www.wago.com/850-828/002-000)**Item no.: 850-828**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828](http://www.wago.com/850-828)**Item no.: 850-834**

IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20

[www.wago.com/850-834](http://www.wago.com/850-834)**Item no.: 850-835**

IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-835](http://www.wago.com/850-835)**Item no.: 850-836**

IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-836](http://www.wago.com/850-836)**Carrier rail**

## Mounting accessories

**Item no.: 210-197**


Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored

[www.wago.com/210-197](http://www.wago.com/210-197)**Item no.: 210-198**


Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

[www.wago.com/210-198](http://www.wago.com/210-198)**Item no.: 210-504**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored

[www.wago.com/210-504](http://www.wago.com/210-504)**Item no.: 210-505**


Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

[www.wago.com/210-505](http://www.wago.com/210-505)**Item no.: 210-506**


Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored

[www.wago.com/210-506](http://www.wago.com/210-506)**Item no.: 210-508**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored

[www.wago.com/210-508](http://www.wago.com/210-508)**Item no.: 210-113**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

[www.wago.com/210-113](http://www.wago.com/210-113)**Item no.: 210-118**

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

[www.wago.com/210-118](http://www.wago.com/210-118)**Item no.: 210-112**

Subject to changes. Please also observe the further product documentation!

WAGO GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; [www.wago.com/210-112](http://www.wago.com/210-112)  
silver-colored



**Item no.: 210-114**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored [www.wago.com/210-114](http://www.wago.com/210-114)



**Item no.: 210-115**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; [www.wago.com/210-115](http://www.wago.com/210-115)  
silver-colored



**Item no.: 210-196**  
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored [www.wago.com/210-196](http://www.wago.com/210-196)

## Supply module

### Supply module



**Item no.: 750-601**  
Power Supply; 24 VDC; fuse holder [www.wago.com/750-601](http://www.wago.com/750-601)



**Item no.: 750-610**  
Power Supply; 24 VDC; fuse holder; Diagnostics [www.wago.com/750-610](http://www.wago.com/750-610)



**Item no.: 750-602**  
Power Supply; 24 VDC [www.wago.com/750-602](http://www.wago.com/750-602)



**Item no.: 750-612**  
Power Supply; 0 ... 230 V AC/DC [www.wago.com/750-612](http://www.wago.com/750-612)

## Downloads

### Documentation

#### Manual

|                                                                              |                        |               |          |
|------------------------------------------------------------------------------|------------------------|---------------|----------|
| System Manual WAGO I/O System 750/753<br>Decentralized Automation Technology | V 3.3.3<br>2023 Aug 29 | pdf<br>8.7 MB | Download |
|------------------------------------------------------------------------------|------------------------|---------------|----------|

|                                                                                             |         |                 |          |
|---------------------------------------------------------------------------------------------|---------|-----------------|----------|
| Product Manual 2-channel pulse width, 24VDC<br>short-circuit protected, high-side switching | V 1.0.2 | pdf<br>380.5 kB | Download |
|---------------------------------------------------------------------------------------------|---------|-----------------|----------|

|                                             |  |     |          |
|---------------------------------------------|--|-----|----------|
| System Manual Series 750/753<br>Online HTML |  | URL | Download |
|---------------------------------------------|--|-----|----------|

#### Bid Text

|                                |             |               |          |
|--------------------------------|-------------|---------------|----------|
| 750-511/000-002<br>X81 - Datei | 2019 Feb 19 | xml<br>4.0 kB | Download |
|--------------------------------|-------------|---------------|----------|

|                 |            |     |          |
|-----------------|------------|-----|----------|
| 750-511/000-002 | 2017 Oct 9 | doc | Download |
|-----------------|------------|-----|----------|

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|             |         |
|-------------|---------|
| doc - Datei | 25.6 kB |
|-------------|---------|

### Instruction Leaflet

|                                                                |             |                 |          |
|----------------------------------------------------------------|-------------|-----------------|----------|
| CCC Ex (Additional information)<br>WAGO-I/O-SYSTEM *750-****/* | 2023 Apr 26 | pdf<br>163.6 kB | Download |
|----------------------------------------------------------------|-------------|-----------------|----------|

### System Description

|                                                         |  |                 |          |
|---------------------------------------------------------|--|-----------------|----------|
| 750/753 Series I/O-System – General Product Information |  | pdf<br>976.2 kB | Download |
|---------------------------------------------------------|--|-----------------|----------|

|                                           |  |                 |          |
|-------------------------------------------|--|-----------------|----------|
| Overview on WAGO-I/O-SYSTEM 750 approvals |  | pdf<br>223.5 kB | Download |
|-------------------------------------------|--|-----------------|----------|

### Additional Information

|                                                                                     |                        |               |          |
|-------------------------------------------------------------------------------------|------------------------|---------------|----------|
| Disposal and Recycling<br>Electrical and electronic equipment, Batteries, Packaging | V 1.1.0<br>2022 Aug 18 | pdf<br>2.2 MB | Download |
|-------------------------------------------------------------------------------------|------------------------|---------------|----------|

### Application Notes

#### Application Note CoDeSys 2.3

|                                                                                                                                                                                                        |                           |                 |          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------------|----------|
| Anwendungshinweis Doepke Ferndimmer LT500<br>In diesem Anwendungshinweis wird beschrieben, wie die Verbindung zwischen dem WAGO I/O System und einem Doepke Ferndimmerlastteil realisiert werden kann. | 20.11.2007<br>2011 Oct 28 | zip<br>320.6 kB | Download |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------------|----------|

### CAD/CAE-Data

#### CAD data

|                              |     |          |
|------------------------------|-----|----------|
| 2D/3D Models 750-511/000-002 | URL | Download |
|------------------------------|-----|----------|

#### CAE data

|                                   |     |          |
|-----------------------------------|-----|----------|
| EPLAN Data Portal 750-511/000-002 | URL | Download |
|-----------------------------------|-----|----------|

|                                |     |          |
|--------------------------------|-----|----------|
| WSCAD Universe 750-511/000-002 | URL | Download |
|--------------------------------|-----|----------|

|                                |     |          |
|--------------------------------|-----|----------|
| WSCAD Universe 750-511/000-002 | URL | Download |
|--------------------------------|-----|----------|

|                                   |     |          |
|-----------------------------------|-----|----------|
| EPLAN Data Portal 750-511/000-002 | URL | Download |
|-----------------------------------|-----|----------|

ZUKEN Portal 750-511/000-002

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|  | URL | Download |
|--|-----|----------|
|--|-----|----------|

Asset Administration Shell

|                                            |     |          |
|--------------------------------------------|-----|----------|
| Asset Administration Shell 750-511/000-002 | URL | Download |
|--------------------------------------------|-----|----------|

Device Files

Device Driver

|                                                    |                        |               |          |
|----------------------------------------------------|------------------------|---------------|----------|
| WAGO USB Service Kabel Treiber / Serie 750 und 857 | 6.5.3.0<br>2014 Sep 10 | zip<br>4.8 MB | Download |
|----------------------------------------------------|------------------------|---------------|----------|

Environmental Product Compliance

Compliance Search

|                                                                                                  |     |          |
|--------------------------------------------------------------------------------------------------|-----|----------|
| Environmental Product Compliance 750-511/000-002<br>2 pulse width outputs; 24 VDC; 0.1 A; 100 Hz | URL | Download |
|--------------------------------------------------------------------------------------------------|-----|----------|

Installation Notes

Product family

WAGO I/O System 750/753  
[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.