

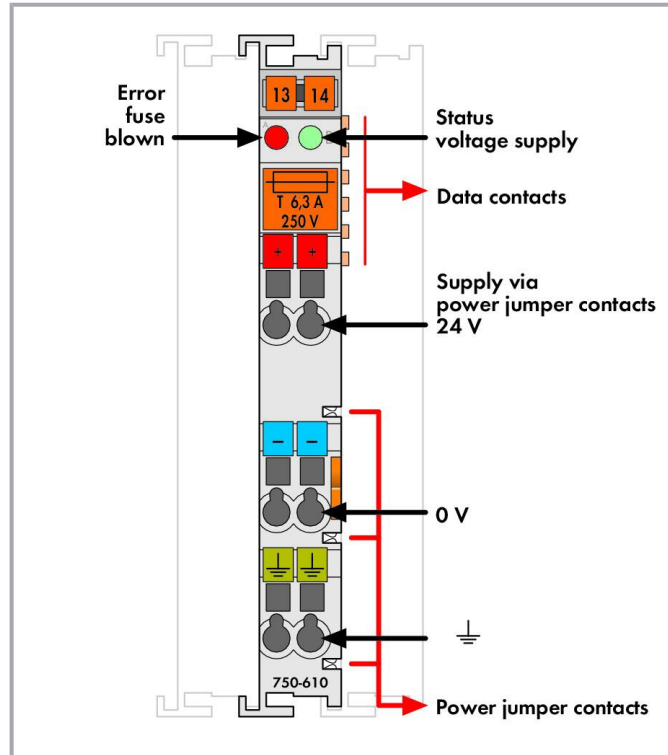
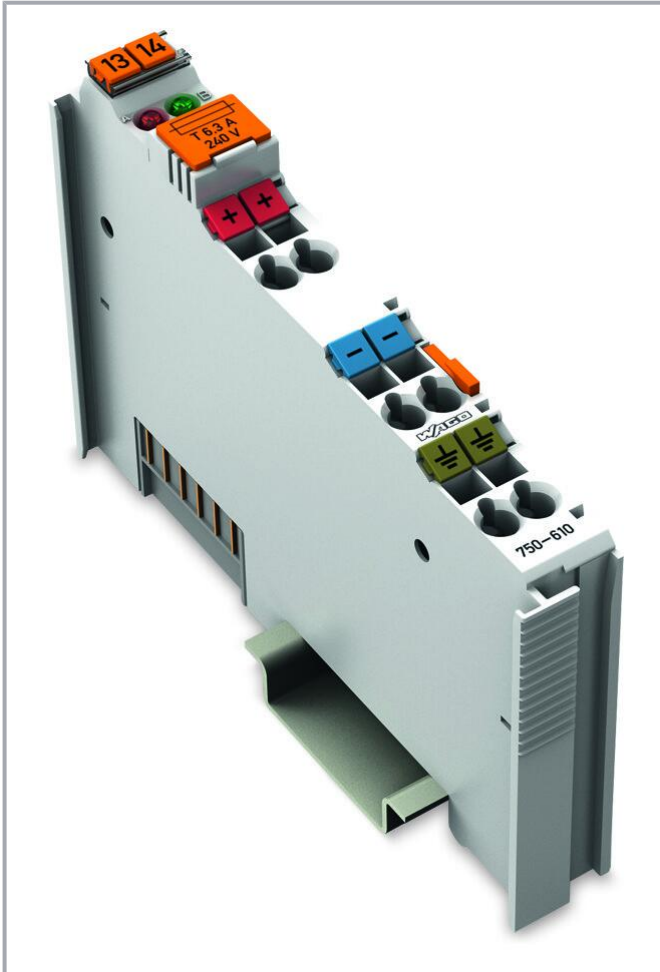


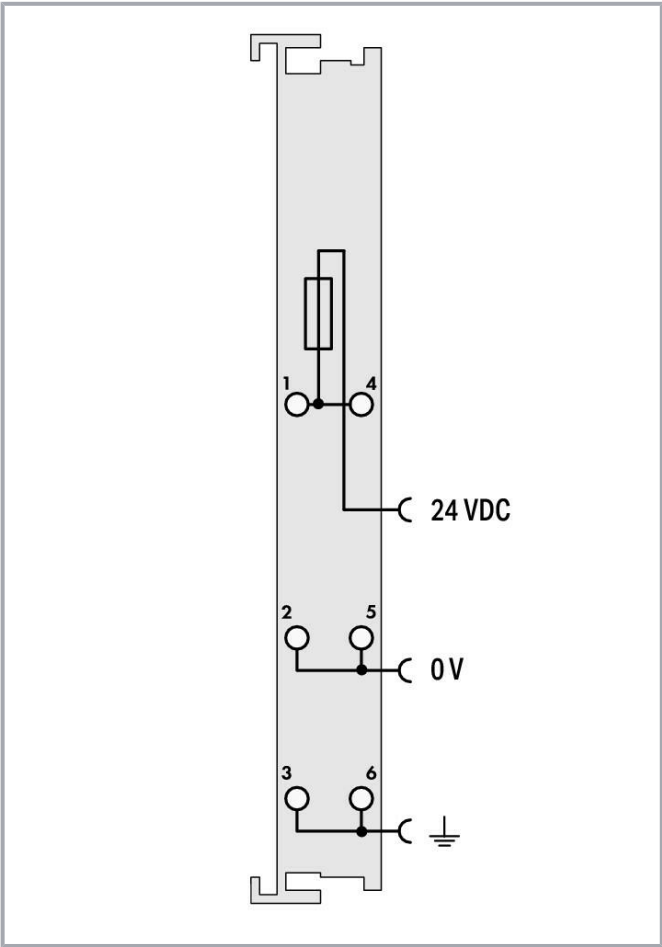

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

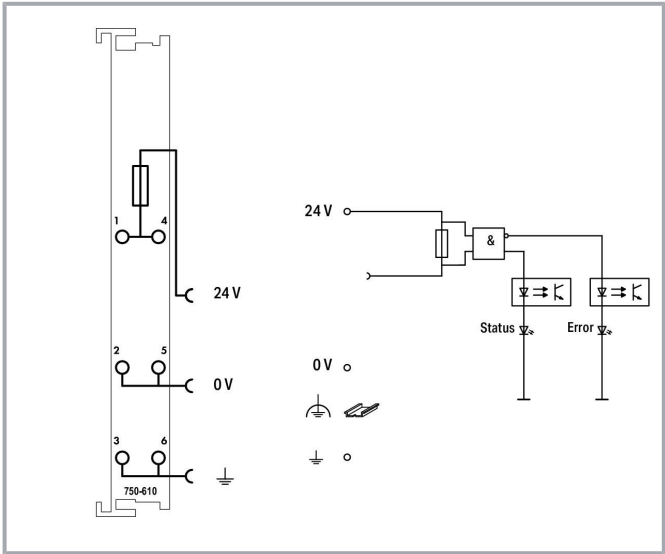

Item description

This supply module provides the I/O modules with the corresponding supply potential.

The maximum current provided by the supply module is 6.3 A. When configuring the system, the total current must not be exceeded. Should higher currents be necessary, an intermediate supply module must be added to the assembly.

This module is fuse-protected (5 x 20 mm). The fuse can be changed quickly, with ease, from the retractable fuse carrier.

A blown fuse and the status of the supply voltage are indicated via LEDs.

The I/O module sends information about the status of the supply module to the fieldbus coupler through two input bits. One bit is for the status of the fuse. The other bit is for the status of the supply voltage

Data

Technical data

| Signal type                                                                | Voltage |
|----------------------------------------------------------------------------|---------|
| Subject to changes. Please also observe the further product documentation! |         |

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                                                   |                                                                                                                                                               |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Signal type (voltage)                             | 24 VDC                                                                                                                                                        |
| Diagnostics                                       | Supply voltage (field): Detection "on" at > 15 VDC; Detection "off" at < 5 VDC                                                                                |
| Fuse                                              | 5 x 20; T 6.3 A (not included)                                                                                                                                |
| Data width                                        | 2 bits (1 bit current monitoring, 1 bit fuse fault)                                                                                                           |
| Supply voltage (system)                           | 5 VDC; via data contacts                                                                                                                                      |
| Current consumption (5 V system supply)           | 5 mA                                                                                                                                                          |
| Supply voltage (field)                            | 24 VDC (-25 ... +30 %); Via power jumper contacts (power supply via CAGE CLAMP® connection; transmission (supply voltage field side only) via spring contact) |
| Indicators                                        | LED (A) red: defective fuse error; LED (B) green: power supply status                                                                                         |
| Number of outgoing power jumper contacts          | 3                                                                                                                                                             |
| Current carrying capacity (power jumper contacts) | 6.3 A                                                                                                                                                         |

## Connection data

|                                     |                                   |
|-------------------------------------|-----------------------------------|
| Connection technology: field supply | 6 x CAGE CLAMP®                   |
| Connection type 1                   | Field supply                      |
| Solid conductor                     | 0.08 ... 2.5 mm² / 28 ... 14 AWG  |
| Fine-stranded conductor             | 0.08 ... 2.5 mm² / 28 ... 14 AWG  |
| Strip length                        | 8 ... 9 mm / 0.31 ... 0.35 inches |

## Physical data

|                                   |                        |
|-----------------------------------|------------------------|
| Width                             | 12 mm / 0.472 inches   |
| Height                            | 100 mm / 3.937 inches  |
| Depth                             | 69.8 mm / 2.748 inches |
| Depth from upper-edge of DIN-rail | 62.6 mm / 2.465 inches |

## Mechanical Data

|               |             |
|---------------|-------------|
| Mounting type | DIN-35 rail |
|---------------|-------------|

## Material data

|                    |                              |
|--------------------|------------------------------|
| Housing material   | Polycarbonate; polyamide 6.6 |
| Fire load          | 1.671 MJ                     |
| Weight             | 46.8 g                       |
| Conformity marking | CE                           |

Subject to changes. Please also observe the further product documentation!



## Environmental requirements

|                                                                                    |                                       |
|------------------------------------------------------------------------------------|---------------------------------------|
| Ambient temperature (operation)                                                    | 0 ... +55 °C                          |
| Ambient temperature (storage)                                                      | -40 ... +85 °C                        |
| Protection type                                                                    | IP20                                  |
| Pollution degree                                                                   | 2 per IEC 61131-2                     |
| Operating altitude                                                                 | 0 ... 2000 m / 0 ... 6562 ft          |
| Mounting position                                                                  | horizontal (standing/lying); vertical |
| Relative humidity (without condensation)                                           | 95 %                                  |
| Vibration resistance                                                               | 4g per IEC 60068-2-6                  |
| Shock resistance                                                                   | 15g per IEC 60068-2-27                |
| EMC immunity to interference                                                       | per EN 61000-6-2, marine applications |
| EMC emission of interference                                                       | per EN 61000-6-4, marine applications |
| Exposure to pollutants                                                             | Per IEC 60068-2-42 and IEC 60068-2-43 |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                |

## Commercial data

|                       |                 |
|-----------------------|-----------------|
| Product Group         | 15 (I/O System) |
| eCl@ss 10.0           | 27-24-26-10     |
| eCl@ss 9.0            | 27-24-26-10     |
| ETIM 8.0              | EC001600        |
| ETIM 7.0              | EC001600        |
| Recupel Type          |                 |
| PU (SPU)              | 1 pcs           |
| Packaging type        | box             |
| Country of origin     | DE              |
| GTIN                  | 4045454396145   |
| Customs tariff number | 85389091890     |

## Environmental Product Compliance

|                                |                                                   |
|--------------------------------|---------------------------------------------------|
| CAS-No.                        | 1303-86-2<br>1317-36-8<br>25550-51-0<br>7439-92-1 |
| REACH Candidate List Substance | 4-Methyl-1,2-cyclohexanedicarboxylic anhydride    |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                                           |                                           |
|-------------------------------------------|-------------------------------------------|
|                                           | Diboron trioxide<br>Lead<br>Lead monoxide |
| RoHS Compliance Status                    | Compliant, With Exemption                 |
| RoHS Exemption                            | 6(c)<br>7(a)<br>7(c)-I<br>7(c)-II         |
| SCIP notification number (Austria)        | c36715f9-5c40-41b2-adf9-d5957c44da13      |
| SCIP notification number (Belgium)        | 7e462ec9-8afd-4ffc-9932-6854fcd510a6      |
| SCIP notification number (Bulgaria)       | de728fff-7a8a-4dcd-8891-55bae0a63909      |
| SCIP notification number (Czech Republic) | 50cc0f06-c64f-4a3e-bf92-7a40111c4ce1      |
| SCIP notification number (Denmark)        | a7f1d4c1-2846-43c0-bfd9-d82b326af59e      |
| SCIP notification number (Finland)        | 44ebb0bc-0a17-4c46-b729-113c8d64ee89      |
| SCIP notification number (France)         | 74e9db25-dd06-4112-9f35-29e00223c6ba      |
| SCIP notification number (Germany)        | dc722b39-d957-4e52-8057-659aa749f781      |
| SCIP notification number (Hungary)        | 1455ff80-7191-4e7f-925a-63e8343ec057      |
| SCIP notification number (Italy)          | 29a07005-72c3-4ce2-a464-d2090052f491      |
| SCIP notification number (Netherlands)    | 21bc08b9-1085-414a-8c57-a8f10f34963d      |
| SCIP notification number (Poland)         | e57d7b40-2b74-4f28-8f1c-71c9513157b9      |
| SCIP notification number (Romania)        | 746c698b-617d-4240-9693-6e64d1028b5e      |
| SCIP notification number (Sweden)         | 388144aa-fc99-428d-8470-2d262bdfb9a2      |

## Approvals / Certificates

### General approvals

| Logo                                                                               | Approval                                                            | Additional Approval Text | Certificate name                    |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------|-------------------------------------|
|  | <b>EAC</b><br>Brjansker Zertifizierungsstelle                       | TP TC 020/2011           | EAC RU C-DE.AM02.<br>B.00087<br>/19 |
|   | <b>KC</b><br>National Radio Research Agency                         | Article 58-2, Clause 3   | MSIP-REM-W43-SPP750                 |
|  | <b>UL</b><br>UL International Netherlands B.V. (ORDINARY LOCATIONS) | UL 508                   | E175199<br>Sec.1                    |

### Declarations of conformity and manufacturer's declarations

Certificate

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

| Logo                                                                             | Approval                                           | Additional Approval Text | name |
|----------------------------------------------------------------------------------|----------------------------------------------------|--------------------------|------|
|  | EU-Declaration of Conformity<br>WAGO GmbH & Co. KG | -                        | -    |
|  | UK-Declaration of Conformity<br>WAGO GmbH & Co. KG | -                        | -    |

## Approvals for marine applications


| Logo                                                                                | Approval                                              | Additional Approval Text | Certificate name  |
|-------------------------------------------------------------------------------------|-------------------------------------------------------|--------------------------|-------------------|
|     | ABS<br>American Bureau of Shipping                    | -                        | 22-2219060        |
|    | BSH<br>Bundesamt fuer Seeschifffahrt und Hydrographie | -                        | 1104              |
|   | BV<br>Bureau Veritas S.A.                             | -                        | 13453/E0 BV       |
|   | DNV<br>DNV GL SE                                      | DNV-CG-0339,Aug.2021     | TAA0000194        |
|   | KR<br>Korean Register of Shipping                     | -                        | KR HMB05880-AC001 |
|  | LR<br>Lloyds Register EMEA                            | -                        | LR22180952TA      |
|  | PRS<br>Polski Rejestr Statków                         | -                        | TE/2236/880590/19 |
|   | RINA<br>RINA Germany GmbH                             | -                        | ELE343521XG001    |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Approvals for hazardous areas

| Logo                                                                               | Approval                                                             | Additional Approval Text | Certificate name                                     |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------|--------------------------|------------------------------------------------------|
|    | <b>ATEX</b><br>TUEV Nord Cert GmbH                                   | EN 60079-0               | TUEV14ATEX148929X (II 3 G<br>Ex ec IIC T4 Gc)        |
|    | <b>CCCEX</b><br>CQST/CNEEx                                           | CNCA-C23-01              | 2020312310000213 (Ex ec IIC<br>T4 Gc)                |
|    | <b>EAC</b><br>Brjansker Zertifizierungsstelle                        | TP TC 012/2011           | EAC RU C-DE.AM02.B.00163<br>/19 (2Ex nA IIC T4 Gc X) |
|    | <b>IECEX</b><br>TUEV Nord Cert GmbH                                  | IEC 60079-0              | IECEX TUN 14.0035 X (Ex ec<br>IIC T4 Gc)             |
|   | <b>INMETRO</b><br>TÜV Rheinland do Brasil Ltda.                      | IEC 60079-0              | BR-Ex_TÜV 12.1297 X                                  |
|  | <b>UKEx</b><br>WAGO GmbH & Co. KG                                    | EN 60079-0               | UKCA_WAGO22UKEX003X_ec                               |
|  | <b>UL</b><br>Underwriters Laboratories Inc. (HAZARDOUS<br>LOCATIONS) | UL 121201                | E198726 Sec.1                                        |

## Optional accessories

## System housing

| System enclosure                                                                   |                                                                                                                          |                                                                                |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
|  | <b>Item no.: 850-814/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate | <a href="http://www.wago.com/850-814/002-000">www.wago.com/850-814/002-000</a> |
|  | <b>Item no.: 850-815/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate | <a href="http://www.wago.com/850-815/002-000">www.wago.com/850-815/002-000</a> |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 850-816/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate

[www.wago.com/850-816/002-000](http://www.wago.com/850-816/002-000)**Item no.: 850-817/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate

[www.wago.com/850-817/002-000](http://www.wago.com/850-817/002-000)**Item no.: 850-825**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20

[www.wago.com/850-825](http://www.wago.com/850-825)**Item no.: 850-826**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826](http://www.wago.com/850-826)**Item no.: 850-827**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827](http://www.wago.com/850-827)**Item no.: 850-827/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827/002-000](http://www.wago.com/850-827/002-000)**Item no.: 850-826/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826/002-000](http://www.wago.com/850-826/002-000)**Item no.: 850-828/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828/002-000](http://www.wago.com/850-828/002-000)**Item no.: 850-828**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828](http://www.wago.com/850-828)**Item no.: 850-834**

IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20

[www.wago.com/850-834](http://www.wago.com/850-834)**Item no.: 850-835**

IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-835](http://www.wago.com/850-835)**Item no.: 850-836**

IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-836](http://www.wago.com/850-836)**Shield termination**

## Shield clamping saddles

**Item no.: 790-116**

Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm

[www.wago.com/790-116](http://www.wago.com/790-116)**Item no.: 790-124**

Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm

[www.wago.com/790-124](http://www.wago.com/790-124)**Item no.: 790-108**

Subject to changes. Please also observe the further product documentation!

WAGO GmbH &amp; Co. KG

Hansastraße 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm

[www.wago.com/790-108](http://www.wago.com/790-108)**Item no.: 790-140**

Shield clamping saddle; diameter of compatible conductor

[www.wago.com/790-140](http://www.wago.com/790-140)**Item no.: 790-216**

Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm

[www.wago.com/790-216](http://www.wago.com/790-216)**Item no.: 790-220**

Shield clamping saddle; 30 mm wide; 6 ... 20 mm

[www.wago.com/790-220](http://www.wago.com/790-220)**Item no.: 790-208**

Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm

[www.wago.com/790-208](http://www.wago.com/790-208)**Marking accessories****Marker carrier****Item no.: 750-103**

Group marker carrier

[www.wago.com/750-103](http://www.wago.com/750-103)**Marker****Item no.: 2009-145/000-006**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

[www.wago.com/2009-145](http://www.wago.com/2009-145)

/000-006

**Item no.: 2009-145**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-145](http://www.wago.com/2009-145)**Item no.: 2009-145/000-002**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

[www.wago.com/2009-145](http://www.wago.com/2009-145)

/000-002

**Item no.: 2009-145/000-007**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[www.wago.com/2009-145](http://www.wago.com/2009-145)

/000-007

**Item no.: 2009-145/000-005**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

[www.wago.com/2009-145](http://www.wago.com/2009-145)

/000-005

**Item no.: 2009-145/000-012**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

[www.wago.com/2009-145](http://www.wago.com/2009-145)

/000-012

**Item no.: 2009-145/000-023**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

[www.wago.com/2009-145](http://www.wago.com/2009-145)

/000-023

**Item no.: 2009-145/000-024**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/2009-145](http://www.wago.com/2009-145)

/000-024

Subject to changes. Please also observe the further product documentation!

WAGO GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 248-501/000-006**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

[www.wago.com/248-501/000-006](http://www.wago.com/248-501/000-006)**Item no.: 248-501/000-007**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray

[www.wago.com/248-501/000-007](http://www.wago.com/248-501/000-007)**Item no.: 248-501/000-002**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

[www.wago.com/248-501/000-002](http://www.wago.com/248-501/000-002)**Item no.: 248-501/000-012**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

[www.wago.com/248-501/000-012](http://www.wago.com/248-501/000-012)**Item no.: 248-501**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/248-501](http://www.wago.com/248-501)**Item no.: 248-501/000-017**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/248-501/000-017](http://www.wago.com/248-501/000-017)**Item no.: 248-501/000-005**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/248-501/000-005](http://www.wago.com/248-501/000-005)**Item no.: 248-501/000-024**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/248-501/000-024](http://www.wago.com/248-501/000-024)**Item no.: 248-501/000-023**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/248-501/000-023](http://www.wago.com/248-501/000-023)**Item no.: 750-100**

Marker card; as a DIN A4 sheet; plain

[www.wago.com/750-100](http://www.wago.com/750-100)

Group marker carrier

**Item no.: 750-106**

Group marker carrier

[www.wago.com/750-106](http://www.wago.com/750-106)**Carrier rail**

Mounting accessories

Subject to changes. Please also observe the further product documentation!

WAGO GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 210-197**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored

[www.wago.com/210-197](http://www.wago.com/210-197)**Item no.: 210-198**


Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

[www.wago.com/210-198](http://www.wago.com/210-198)**Item no.: 210-504**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored

[www.wago.com/210-504](http://www.wago.com/210-504)**Item no.: 210-505**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

[www.wago.com/210-505](http://www.wago.com/210-505)**Item no.: 210-506**


Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored

[www.wago.com/210-506](http://www.wago.com/210-506)**Item no.: 210-508**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored

[www.wago.com/210-508](http://www.wago.com/210-508)**Item no.: 210-113**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

[www.wago.com/210-113](http://www.wago.com/210-113)**Item no.: 210-118**

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

[www.wago.com/210-118](http://www.wago.com/210-118)**Item no.: 210-112**


Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored

[www.wago.com/210-112](http://www.wago.com/210-112)**Item no.: 210-114**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-114](http://www.wago.com/210-114)**Item no.: 210-115**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored

[www.wago.com/210-115](http://www.wago.com/210-115)**Item no.: 210-196**

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-196](http://www.wago.com/210-196)**Downloads****Documentation****Manual**Product Manual 24VDC, max. 6.3A  
without diagnostics, with fuse holderV 1.1.0  
2023 Dec 5pdf  
2.1 MB[Download](#)

System Manual WAGO I/O System 750/753

V 3.3.3

pdf

[Download](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                                                                                     |                        |                 |          |
|-------------------------------------------------------------------------------------|------------------------|-----------------|----------|
| Decentralized Automation Technology                                                 | 2023 Aug 29            | 8.7 MB          |          |
| System Manual Series 750/753<br>Online HTML                                         |                        | URL             | Download |
| <b>Bid Text</b>                                                                     |                        |                 |          |
| 750-610<br>X81 - Datei                                                              | 2019 Feb 19            | xml<br>4.6 kB   | Download |
| 750-610<br>doc - Datei                                                              | 2017 Oct 6             | doc<br>27.6 kB  | Download |
| ausschreiben.de 750-610                                                             |                        | URL             | Download |
| <b>Instruction Leaflet</b>                                                          |                        |                 |          |
| CCC Ex (Additional information)<br>WAGO-I/O-SYSTEM *750-****/*                      | 2023 Apr 26            | pdf<br>163.6 kB | Download |
| <b>System Description</b>                                                           |                        |                 |          |
| 750/753 Series I/O-System – General Product Information                             |                        | pdf<br>976.2 kB | Download |
| Overview on WAGO-I/O-SYSTEM 750 approvals                                           |                        | pdf<br>223.5 kB | Download |
| <b>Additional Information</b>                                                       |                        |                 |          |
| Disposal and Recycling<br>Electrical and electronic equipment, Batteries, Packaging | V 1.1.0<br>2022 Aug 18 | pdf<br>2.2 MB   | Download |
| <b>CAD/CAE-Data</b>                                                                 |                        |                 |          |
| <b>CAD data</b>                                                                     |                        |                 |          |
| 2D/3D Models 750-610                                                                |                        | URL             | Download |
| <b>CAE data</b>                                                                     |                        |                 |          |
| EPLAN Data Portal 750-610                                                           |                        | URL             | Download |
| WSCAD Universe 750-610                                                              |                        | URL             | Download |

Subject to changes. Please also observe the further product documentation!



|                      |     |          |
|----------------------|-----|----------|
| ZUKEN Portal 750-610 | URL | Download |
|----------------------|-----|----------|

Asset Administration Shell

|                                    |     |          |
|------------------------------------|-----|----------|
| Asset Administration Shell 750-610 | URL | Download |
|------------------------------------|-----|----------|

Device Files

Device Driver

|                                                    |                        |               |          |
|----------------------------------------------------|------------------------|---------------|----------|
| WAGO USB Service Kabel Treiber / Serie 750 und 857 | 6.5.3.0<br>2014 Sep 10 | zip<br>4.8 MB | Download |
|----------------------------------------------------|------------------------|---------------|----------|

Environmental Product Compliance

Compliance Search

|                                                                                            |     |          |
|--------------------------------------------------------------------------------------------|-----|----------|
| Environmental Product Compliance 750-610<br>Power Supply; 24 VDC; fuse holder; Diagnostics | URL | Download |
|--------------------------------------------------------------------------------------------|-----|----------|

Installation Notes

Product family

WAGO I/O System 750/753  
[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.