
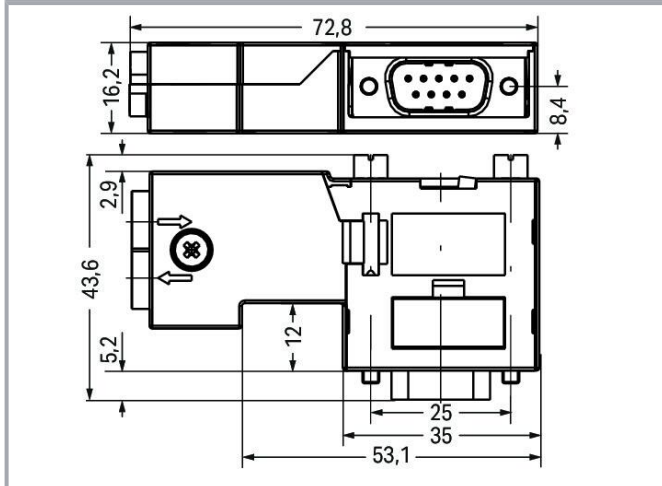


Color:

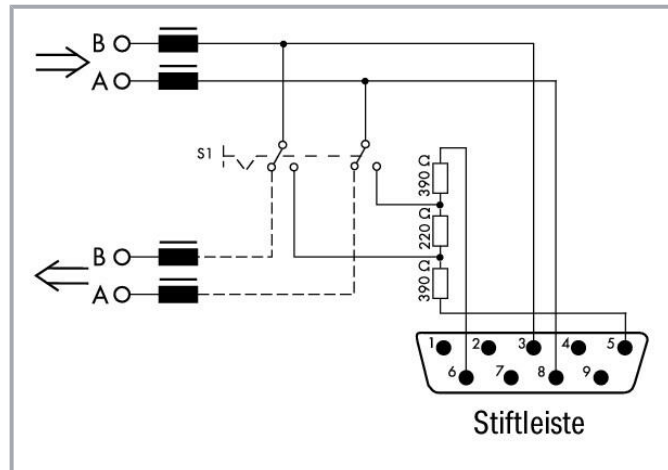

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Item description

This fieldbus connector links a PROFIBUS device to a PROFIBUS line.

The fieldbus connector has the following features:

- Compact design Perfectly connects to an S7 PLC
- No losable parts
- Two horizontal cable entries for both input and output
- Fast and maintenance-free CAGE CLAMP® connection – a locking slide keeps the clamping unit in its open position
- Externally operable switch to activate or deactivate the network terminating resistor

For the first and last station on the bus, the switch must be set to "ON" (Terminating resistor activated, outgoing bus line disconnected) Switch setting to "OFF" for downstream bus stations (Terminating resistor deactivated)

## Data

### Technical data

Connection type	D-sub 9 plug
Pole number	9
Communication/fieldbus	PROFIBUS
Baud rate	12 Mbit/s (per PROFIBUS specification)
Supply voltage	4.75 ... 5.25 VDC
Input current	5 mA

### Connection data

Connection type 1	CAGE CLAMP® terminal strip with locking slide (218 Series)
Solid conductor	0.08 ... 0.5 mm² / 28 ... 20 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

### Physical data

Width	43.6 mm / 1.717 inches
Height	16.2 mm / 0.638 inches
Depth	72.8 mm / 2.866 inches

### Mechanical Data

Connectable sheathed cable diameter	8.5 mm
Cable glands (number)	2

Subject to changes. Please also observe the further product documentation!



Housing material	PC-V0
Weight	45 g
Color	light gray

## Environmental requirements

Ambient temperature (operation)	0 ... +60 °C
Ambient temperature (storage)	-25 ... +85 °C
Protection type	IP20
Relative humidity (without condensation)	95 %

## Commercial data

Product Group	15 (I/O System)
eCl@ss 10.0	27-24-26-92
eCl@ss 9.0	27-24-26-92
ETIM 8.0	EC002584
ETIM 7.0	EC002584
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4045454633875
Customs tariff number	85366990990

## Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

## Downloads

### Documentation

#### Manual

System Manual WAGO I/O System 750/753 Decentralized Automation Technology	V 3.3.3 2023 Aug 29	pdf 8.7 MB	Download
--	------------------------	---------------	----------

#### Bid Text

750-971 X81 - Datei	2019 Feb 19	xml 4.9 kB	Download
750-971	2017 Oct 6	doc	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



doc - Datei	26.6 kB
-------------	---------

Additional Information

Disposal and Recycling	V 1.1.0	pdf	Download
Electrical and electronic equipment, Batteries, Packaging	2022 Aug 18	2.2 MB	

CAD/CAE-Data

CAE data

EPLAN Data Portal 750-971	URL	Download
WSCAD Universe 750-971	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 750-971	URL	Download
Fieldbus Connector PROFIBUS; with D-sub male connector; 9-pole		

Installation Notes

Subject to changes. Please also observe the further product documentation!