
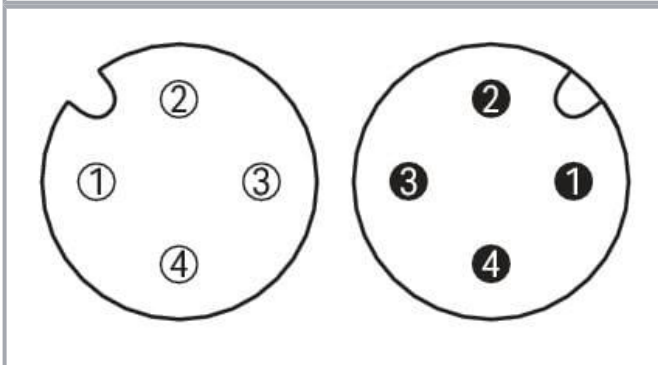


## Data sheet | Item number: 756-3106/040-100

Power cable; M12A socket; angled; M12A plug; angled; 4-pole; Length: 10 m

[www.wago.com/756-3106/040-100](http://www.wago.com/756-3106/040-100)

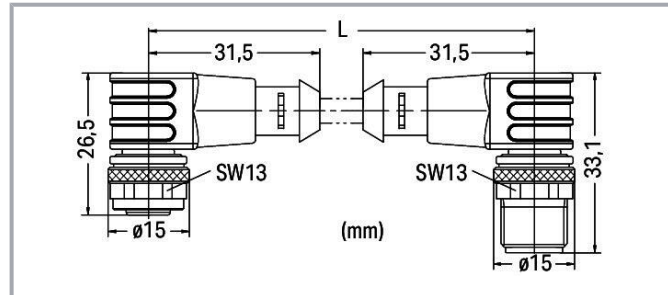

Pin 1 ... 4: 0.75 mm<sup>2</sup>

1	brown	1
2	white	2
3	blue	3
4	black	4

### Item description

#### Short description:

- PUR, halogen-free
- UL / CSA
- Suitable for drag chains
- Silicon- and CFC-free
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

## Data

### Technical data

Connection type	M12 socket - M12 plug
Pole number	4
Cable connection direction to mating direction	90 °
Cable connection direction to mating direction (2)	90 °
Connector interface coding (cable/adapter) 1 1	A-coded
Connector interface coding (cable/adapter) 2 1	A-coded
Cable length	10 m
PLC manufacturer	WAGO
Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	2.5 kV
Contact resistance	10 mΩ
Insulation resistance	>10 <sup>9</sup> Ω
Conductor resistance	≤ 26 Ω/km

### Mechanical Data

Bending radius	10 x cable diameter (min.) for flexible application
Bending cycles	4 Mio.
Drag chain capability	yes
Sheathed cable diameter	6 ... 6.4 mm
Type code	Lif9YH-11YH 4x0.75 mm <sup>2</sup>
Conductor configuration	Bare copper wire (40 x 0.15 mm)
Conductor insulation	PP9Y (halogen-free)
Housing material	TPU/TPU, black (~ RAL 9005)
Tightening torque	1 Nm
Weight	577 g

### Environmental requirements

Ambient (operating) temperature (dynamic)	-30 ... +80 °C
Ambient (operating) temperature (static)	-30 ... +80 °C
Protection type	IP67
Pollution degree	3/2 per IEC 60664-1

Subject to changes. Please also observe the further product documentation!

**Commercial data**

eCl@ss 10.0	27-06-18-01
eCl@ss 9.0	27-06-18-01
ETIM 8.0	EC001855
ETIM 7.0	EC003249
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4045454127107
Customs tariff number	85444290900

**Environmental Product Compliance**

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	43f57087-9dd9-4117-90aa-2bebb8a8bbd1
SCIP notification number (Belgium)	4258a208-cd8b-4349-97fc-1e212d24baf9
SCIP notification number (Bulgaria)	574e612e-816f-4dae-846e-9069988b59bd
SCIP notification number (Czech Republic)	3cb6cd57-711b-4984-8be8-aeead39793a8
SCIP notification number (Denmark)	83dd5e2a-57de-4afe-8d01-d5931f3b050c
SCIP notification number (Finland)	cefbe4a2-589a-472c-b578-3578dc2f80a7
SCIP notification number (France)	db0ed31f-3fd0-4f45-a2dc-c8e02143cd50
SCIP notification number (Germany)	60321f30-97cb-491d-96d4-37a379bbc707
SCIP notification number (Hungary)	34a56285-b24e-4cd0-9a15-8953a98c7b01
SCIP notification number (Italy)	444c293e-fb4b-4ff4-81bd-dc561eeba100
SCIP notification number (Netherlands)	048f573f-9dfa-449e-9235-21ff3398234f
SCIP notification number (Poland)	457491df-ae88-4d05-b604-6dd0a42d9b05
SCIP notification number (Romania)	2e44211d-6b0a-44fc-b6fd-b41d05529fd1
SCIP notification number (Sweden)	3bc71d4b-37dd-4939-903e-e2c16f72aa34

**Approvals / Certificates****General approvals**

Logo	Approval	Additional Approval Text	Certificate name
	UL	UL 2238	E519602

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Underwriters Laboratories Inc.

## Downloads

### Documentation

#### System Description

I/O-SYSTEM – SPEEDWAY, General Product Information	pdf 1.1 MB	Download
--	---------------	----------

## CAD/CAE-Data

### CAE data

WSCAD Universe 756-3106/040-100	URL	Download
WSCAD Universe 756-3106/040-100	URL	Download

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 756-3106/040-100	URL	Download
Power cable; M12A socket; angled; M12A plug; angled; 4-pole; Length: 10 m		

## Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.