



Data sheet | Item number: 756-5102/030-015

Sensor/Actuator cable; M8 socket; angled; 3-pole; Length: 1.5 m

www.wago.com/756-5102/030-015



 Picture differs from the item.

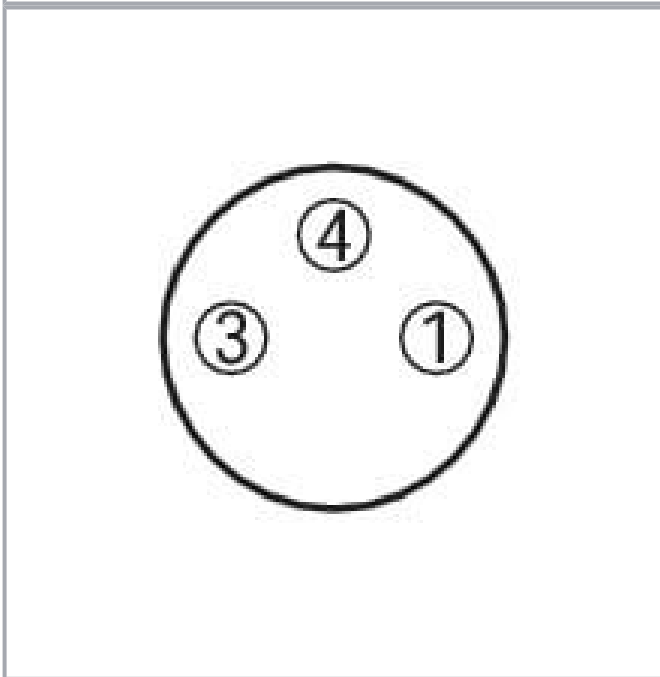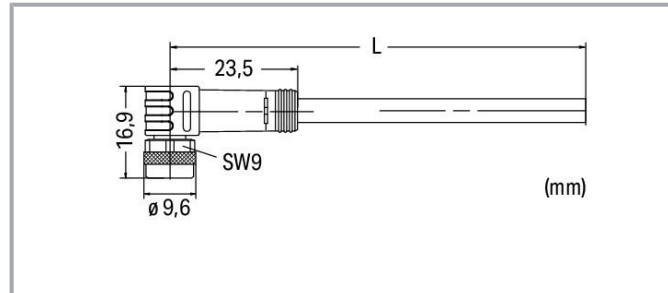

Pin 1 ... 4: 0.25 mm²

- 1) brown
- 3) blue
- 4) black

Item description

Short description:

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



- PUR, halogen-free
- Suitable for drag chains
- Good resistance to microbes, hydrolysis, oil, chemicals and UV radiation.
- Good chemical resistance.
- Cable used: UL listed

Data

Technical data

General information

Operating voltage	AC/DC 60 V
Operating current	4 A
Rated surge voltage	1.5 kV
Insulation resistance	$>10^9 \Omega$
Contact resistance	10 m Ω
Conductor resistance	$\leq 60 \Omega/\text{km}$
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Drag chain compatible

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	1.5 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame

Subject to changes. Please also observe the further product documentation!



	resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	3.9 ... 4.3 mm

Connector

Connection type	M8 socket - free end
Pole number	3
Cable connection direction to mating direction	90 °
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	0.6 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CZ
GTIN	4044918973311
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	483208b0-c958-4f22-8924-b91ec3ec3ed2
SCIP notification number (Belgium)	00d4ea08-65a4-452d-b280-6641300715b2
SCIP notification number (Bulgaria)	e93dbeee-8d32-4375-adc7-b573a76cfc07
SCIP notification number (Czech Republic)	5326b54e-fa75-4da4-b08e-05c4faf37d47
SCIP notification number (Denmark)	792a24f2-0151-4809-932e-93f073ab81ac
SCIP notification number (Finland)	abdae9a8-b82c-4d6c-913a-bef03d14de23
SCIP notification number (France)	efe4cc73-a89f-4f30-ac90-4d1114e9e05f
SCIP notification number (Germany)	4885b0dd-71fd-4396-88b9-d1b5fe326e54
SCIP notification number (Hungary)	b1ad8225-f784-426e-9e50-6696405a69b7

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (Italy)	14faac97-0b11-4eb8-adc9-9d829703ac9a
SCIP notification number (Netherlands)	cb7200ad-eb60-4e5d-a753-1776dfb0ab5f
SCIP notification number (Poland)	d5e107ee-2e01-4cf0-b967-10bdb0d96482
SCIP notification number (Romania)	740539ea-8c67-4289-8506-051864648e27
SCIP notification number (Sweden)	a5563e51-b688-4d1c-870f-e03576cb575a

Commercial data

eCl@ss 9.0
ETIM 8.0
ETIM 7.0
Customs tariff number

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Documentation

Bid Text

756-5102/030-015 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
756-5102/030-015 doc - Datei	2017 Sep 20	doc 26.1 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 130.8 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



WSCAD Universe 756-5102/030-015	URL	Download
WSCAD Universe 756-5102/030-015	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5102/030-015	URL	Download
Sensor/Actuator cable; M8 socket; angled; 3-pole; Length: 1.5 m		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.