



Data sheet | Item number: 756-5508/030-020

Sensor/Actuator cable; M8 socket; straight; M12A plug; angled; 3-pole;
Length: 2 m

www.wago.com/756-5508/030-020



 Picture differs from the item.

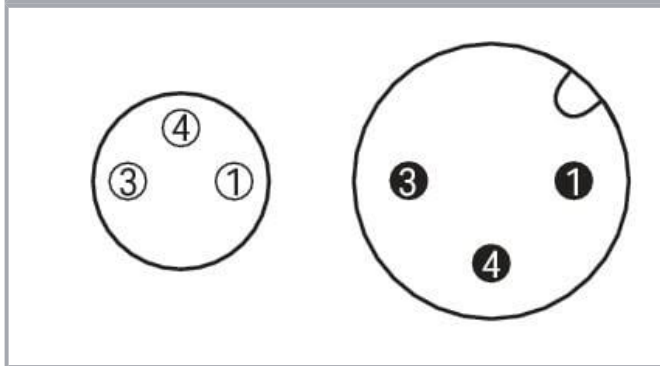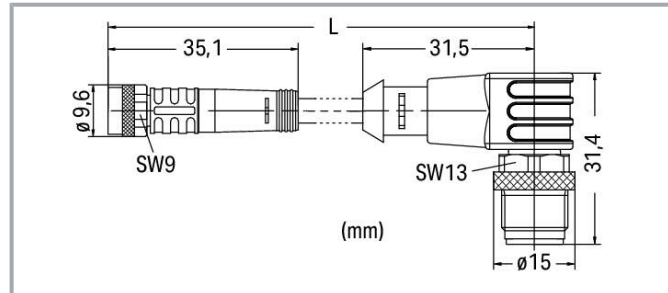

Pin 1 ... 4: 0.25 mm²

1	brown	1
3	blue	3
4	black	4

Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- Good resistance to microbes, hydrolysis, oil, chemicals and UV radiation.
- Good chemical resistance.
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Data

Technical data

General information

Operating voltage	AC/DC 60 V
Operating current	4 A
Rated surge voltage	1.5 kV
Insulation resistance	$> 10^9 \Omega$
Contact resistance	10 m Ω
Conductor resistance	$\leq 60 \Omega/\text{km}$
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Drag chain compatible

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	2 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	3.9 ... 4.3 mm

Connector

Connection type	M8 socket - M12 plug
-----------------	----------------------

Subject to changes. Please also observe the further product documentation!



Pole number	3
Cable connection direction to mating direction	0 °
Cable connection direction to mating direction (2)	90 °
Connector interface coding (cable/adaptor) 2 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	0.6 ... 1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918975865
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	cdcd36fa-e043-48d1-86b1-7d088e11391a
SCIP notification number (Belgium)	3b361d82-7ee9-48f3-82a6-46b6bf084d27
SCIP notification number (Bulgaria)	c58807b4-c2e4-419e-bb0e-e0ce6889aad7
SCIP notification number (Czech Republic)	791f9ebe-43fa-4cf3-b816-cf391f5083ba
SCIP notification number (Denmark)	779cc121-a031-47a4-b081-0c73f1bbeb5a
SCIP notification number (Finland)	21c7298e-a79a-45e6-bf1f-adc691e1a7f9
SCIP notification number (France)	22562bff-7881-42d4-bc40-92a662b83fe0
SCIP notification number (Germany)	116d66cc-6b04-4fe3-bbc5-ebd0a3e99043
SCIP notification number (Hungary)	cb1e0c28-f7dd-4aae-9fa1-52a40e71a138
SCIP notification number (Italy)	e54e275f-e473-40b0-a674-2e64d3642fa9
SCIP notification number (Netherlands)	6b59abac-a54c-491e-9a43-81dae65aab56
SCIP notification number (Poland)	4590199a-6f7d-4747-8ba1-b3b233bba2c5
SCIP notification number (Romania)	c5ad0583-54a7-425d-9a36-3ad420e06077

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (Sweden)

73494baa-fa71-4bcf-a1b8-58c191a7fb80

Commercial data

eCl@ss 9.0

ETIM 8.0

ETIM 7.0

Customs tariff number

Downloads

Documentation

Bid Text

756-5508/030-020 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
---------------------------------	-------------	---------------	----------

756-5508/030-020 doc - Datei	2017 Sep 20	doc 26.1 kB	Download
---------------------------------	-------------	----------------	----------

System Description

IP67 Cables and Pluggable Connectors	pdf 130.8 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5508/030-020	URL	Download
---------------------------------	-----	----------

WSCAD Universe 756-5508/030-020	URL	Download
---------------------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5508/030-020 Sensor/Actuator cable; M8 socket; straight; M12A plug; angled; 3-pole; Length: 2 m	URL	Download
---	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.