



Data sheet | Item number: 756-5502/030-020

Sensor/Actuator cable; M12A socket; straight; M8 plug; angled; 3-pole;
Length: 2 m


www.wago.com/756-5502/030-020



 Picture differs from the item.

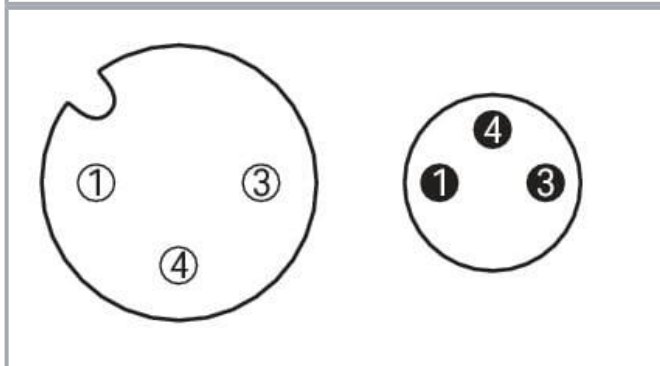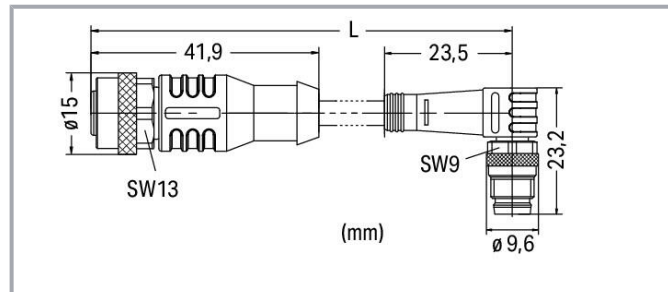

Pin 1 ... 4: 0.25 mm²

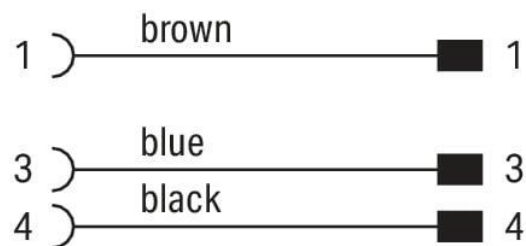

Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- Good resistance to microbes, hydrolysis, oil, chemicals and UV radiation.
- Good chemical resistance.
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

**Data****Technical data****General information**

Operating voltage	AC/DC 60 V
Operating current	4 A
Rated surge voltage	1.5 kV
Insulation resistance	$> 10^9 \Omega$
Contact resistance	10 m Ω
Conductor resistance	$\leq 60 \Omega/\text{km}$
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Drag chain compatible

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	2 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	3.9 ... 4.3 mm

Connector

Connection type	M12 Socket - M8 plug
-----------------	----------------------

Subject to changes. Please also observe the further product documentation!



Pole number	3
Cable connection direction to mating direction	0 °
Cable connection direction to mating direction (2)	90 °
Connector interface coding (cable/adaptor) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	0.6 ... 1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918974783
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	ec6c7f28-1b8f-4c9e-8b16-fab76c89feb0
SCIP notification number (Belgium)	64e13a38-932a-41a9-a1a0-acf6583c5980
SCIP notification number (Bulgaria)	609f9141-7b64-4b93-9ff6-5227fc48b698
SCIP notification number (Czech Republic)	5267d745-9043-4284-b5d7-7cd64f54901d
SCIP notification number (Denmark)	a3e5b8f4-e175-47db-8e08-7d34206e6b97
SCIP notification number (Finland)	2235907c-488f-4165-8b2f-81e2a30dd60f
SCIP notification number (France)	3b2a94f4-f2b6-456c-8caa-c2dcaa6276c8
SCIP notification number (Germany)	156d2eca-d61a-4680-862b-fff7b0eab768
SCIP notification number (Hungary)	199e6009-9afb-4f49-916f-7ae7c80e1579
SCIP notification number (Italy)	77b7bb60-b0d9-47a5-be4f-326bd44c0cfe
SCIP notification number (Netherlands)	7e67c74b-ccea-455f-8a1b-6f2295cd69a1
SCIP notification number (Poland)	bb598152-662d-4674-a272-402fdc9555f0
SCIP notification number (Romania)	2e0d1cce-2cf1-4e1b-ba0d-73f60368a666

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (Sweden)

72652901-1fbd-48c0-b346-6d89cb0acea7

Commercial data

eCl@ss 9.0

ETIM 8.0

ETIM 7.0

Customs tariff number

Downloads

Documentation

Bid Text

756-5502/030-020 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
---------------------------------	-------------	---------------	----------

756-5502/030-020 doc - Datei	2017 Sep 20	doc 26.6 kB	Download
---------------------------------	-------------	----------------	----------

System Description

IP67 Cables and Pluggable Connectors	pdf 130.8 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5502/030-020	URL	Download
---------------------------------	-----	----------

WSCAD Universe 756-5502/030-020	URL	Download
---------------------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5502/030-020 Sensor/Actuator cable; M12A socket; straight; M8 plug; angled; 3-pole; Length: 2 m	URL	Download
---	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.