


Data sheet | Item number: 787-1685

Redundancy Module; 2 x 24 VDC input voltage; 2 x 20 A input current; 24 VDC output voltage; 40 A output current

www.wago.com/787-1685

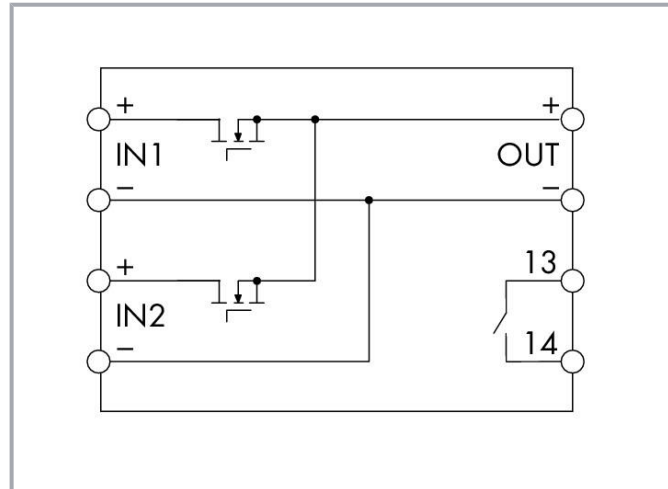

Item description

Features:

- Redundancy module with low-loss MOFSET decouples two power supplies.
- For redundant and fail-safe power supply
- Continuous output current: 40 ADC, in any ratio of both inputs (e.g., 20 A / 20 A or 0 A / 40 A)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



- Suitable for power supplies with PowerBoost and TopBoost
- Same profile as CLASSIC Power Supplies
- Electrically isolated output voltage (SELV/PELV) per EN 61140/UL 60950-1

Data

Technical data

Input

Nominal input voltage $U_{i\text{ nom}}$	2 x DC 24 V
Input voltage range	2 x DC 10 ... 36 V
Nominal mains frequency range	0 Hz
Input current I_i	≤ 40 A (per path); ≤ 40 A (in total)
PowerBoost input	DC 60 A (4 s); DC 50 A (8 s)
TopBoost input	DC 100 A (50 ms)

Output

Nominal output voltage $U_{o\text{ nom}}$	DC 24 V
Output voltage range	DC 10 ... 36 V (U_e – voltage drop)
Voltage drop	≤ 100 mV (Input/output)
Nominal output current $I_{o\text{ nom}}$	40 A (redundancy operation); 40 A (Parallel operation)
Nominal output power	960 W
Switching frequency	5 kHz
PowerBoost	DC 120 A (4 s); DC 100 A (8 s)
TopBoost	DC 200 A (50 ms)

Signaling and communication

Signaling	1 x IN1 LED (green) 1 x IN2 LED (green) 1 x DC OK signal contact (IN1 and IN2 > 10 VDC)
Operation status indicator	2 x Green LED ($U_o > 10$ VDC)

Efficiency/power losses

Power loss P_i	≤ 1.5 W; ≤ 9.5 W (nominal load)
Efficiency (typ.)	99.5 %

Subject to changes. Please also observe the further product documentation!



Circuit protection

Internal fuse	No
---------------	----

Safety and protection

Protection class	III
Protection type	IP20; per EN 60529
Reverse voltage protection	Yes
Pollution degree	2
Parallel operation	Yes
Series operation	No
MTBF	> 500,000 h (per IEC 61709)

Connection data

Connection type 1	Input/output
Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 831 Series
Solid conductor	0.5 ... 10 mm² / 20 ... 8 AWG
Fine-stranded conductor	0.5 ... 10 mm² / 20 ... 8 AWG
Strip length	13 ... 15 mm / 0.51 ... 0.59 inches
Connection type 2	Signaling
Connection technology 2	CAGE CLAMP®
WAGO connector 2	WAGO 721 Series
Solid conductor 2	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor 2	0.08 ... 2.5 mm² / 28 ... 12 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Width	42 mm / 1.654 inches
Height	127 mm / 5 inches
Depth from upper-edge of DIN-rail	139.5 mm / 5.421 inches

Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

Subject to changes. Please also observe the further product documentation!



Material data

Fire load	1.083 MJ
Weight	416 g

Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	-1.5 %/K (> 65 °C)
Climatic category	3K3 (per EN 60721; except for low air pressure)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61000-6-2 EN 61000-6-3 UL 60950 UL 508 DNV EN 61140

Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
Recupel Type	
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143534529
Customs tariff number	85363030888

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC_Certificate_RU_C-DE.AM02.B.00115_19
	UL Underwriters Laboratories Inc.	UL 508	E255817
	UL Underwriters Laboratories Inc.	UL 60950-1	E255815

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	DNV DNV Germany GmbH	DNV-CG-0339,Aug.2021	TAA00000KT

Optional accessories

Mounting adapter

DIN-rail adapter		
	Item no.: 787-897/000-010 Carrier rail adapter made of zinc die-cast; horizontal mounting of 787-16xx (TS35)	www.wago.com/787-897/000-010
Tool		
Operating tool		

Subject to changes. Please also observe the further product documentation!

**Item no.: 210-721**

Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured

www.wago.com/210-721**Item no.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

www.wago.com/210-720**Marking accessories****Marking strip****Item no.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

www.wago.com/2009-110**Item no.: 210-831**

Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white

www.wago.com/210-831**Item no.: 210-832**

Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white

www.wago.com/210-832**Marker****Item no.: 2009-145**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

www.wago.com/2009-145**Item no.: 2009-115**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

www.wago.com/2009-115**Item no.: 248-501**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

www.wago.com/248-501**Item no.: 793-501**

WMB marking card; as card; not stretchable; plain; snap-on type; white

www.wago.com/793-501**Item no.: 793-5501**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

www.wago.com/793-5501**Downloads****Documentation****Bid Text**

787-1685

2019 Jul 15

docx

Download

docx - Datei

23.2 kB

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



787-1685	2019 Jul 15	xml	Download
X81 - Datei		7.1 kB	

Instruction Leaflet

Redundanzmodul	2022 Apr 20	pdf	Download
MOSFET, DC 24 V, 40 A		266.9 kB	

Additional Information

Disposal and Recycling	V 1.1.0	pdf	Download
Electrical and electronic equipment, Batteries, Packaging	2022 Aug 18	2.2 MB	

CAD/CAE-Data

CAD data

2D/3D Models 787-1685	URL	Download
-----------------------	-----	----------

CAE data

EPLAN Data Portal 787-1685	URL	Download
----------------------------	-----	----------

ZUKEN Portal 787-1685	URL	Download
-----------------------	-----	----------

Asset Administration Shell

Asset Administration Shell 787-1685	URL	Download
-------------------------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-1685	URL	Download
Redundancy Module; 2 x 24 VDC input voltage; 2 x 20 A input current; 24 VDC output voltage; 40 A output current		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.