


Part Number : 347083093

Product Description : Stac64 3 Bay Right-Angle Headers, 40 Circuits, Bay A 16 Circuit Signal Header, Polarization B, Gray; Bay B 16 Circuit Signal Header, Polarization A, Black; Bay C 8 Circuit Signal Header, Polarization A, Black; Tray

Series Number : 34708

Status : Active

Product Category : PCB Headers and Receptacles

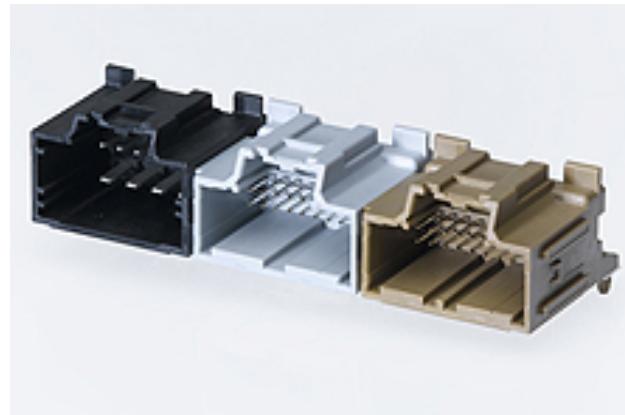

## Documents & Resources

### Drawings

[Drawing 347083093\\_sd.pdf](#)

### 3D Models and Design Files

[3D Model 347083093\\_stp.zip](#)

## Product Environment Compliance

### Compliance

GADSL/IMDS	Duty-To-Declare
China RoHS	
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration

- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	PCB Headers and Receptacles
Series	34708
Description	Stac64 3 Bay Right-Angle Headers, 40 Circuits, Bay A 16 Circuit Signal Header, Polarization B, Gray; Bay B 16 Circuit Signal Header, Polarization A, Black; Bay C 8 Circuit Signal Header, Polarization A, Black; Tray
Application	Automotive, Power, Wire-to-Board
Comments	Bay A 16 Circuits Stac64 Right Angle Signal Header, Polarization B; Bay B 16 Circuits Stac64 Right Angle Signal Header, Polarization A; Bay C 8 Circuits Stac64 Right Angle Signal Header, Polarization A
Component Type	PCB Header
Product Family	Stac64 Single, Multi-Pocket and Hybrid Header System
Product Name	Stac64
UPC	884982560697

#### Electrical

Current - Maximum per Contact	Contact Molex
Voltage - Maximum	500V

#### Physical

Breakaway	No
Circuits (Loaded)	40
Circuits (maximum)	40
Color - Resin	Black, Gray
Durability (mating cycles max)	10
First Mate / Last Break	No

Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	22.200/g
Number of Rows	2
Orientation	Right Angle
Packaging Type	Tray
PC Tail Length	3.36mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Yes
Stackable	No
Temperature Range - Operating	-40° to +100°C
Termination Interface Style	Through Hole

## Solder Process Data

Max-Duration	40
Lead-Free Process Capability	WAVE
Max-Cycle	3
Max-Temp	260

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number

Stac64 Hybrid Receptacle Assemblies	<u>31372</u>
Stac64 Receptacle Housings	<u>34729</u>

---

---

This document was generated on Jan 24, 2024