


Part Number : 530481550

Product Description : 1.25mm Pitch, PicoBlade PCB Header, Single Row, Right-Angle, Through Hole, Gold (Au) Plating, Friction Lock, 15 Circuits, Tray, 2.30mm PC Tail Length

Series Number : 53048

Status : Obsolete

Product Category : PCB Headers and Receptacles

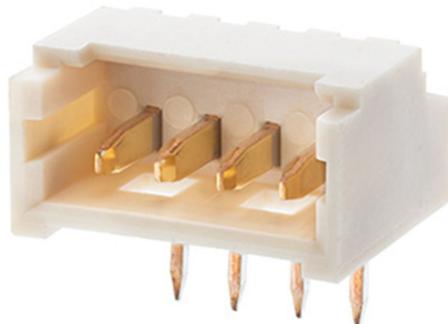

Documents & Resources

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Obsolete
Category	PCB Headers and Receptacles
Series	53048
Description	1.25mm Pitch, PicoBlade PCB Header, Single Row, Right-Angle, Through Hole, Gold (Au) Plating, Friction Lock, 15 Circuits, Tray, 2.30mm PC Tail Length
Application	Signal, Wire-to-Board
Component Type	PCB Header
Product Family	PicoBlade Connector System
Product Name	PicoBlade
UPC	191128467599

Agency

UL	E29179
----	--------

Electrical

Current - Maximum per Contact	1.0A
Voltage - Maximum	125V AC (RMS)/DC

Physical

Breakaway	No
Circuits (Loaded)	15
Circuits (maximum)	15
Color - Resin	Natural
Durability (mating cycles max)	30
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Mated Height	3.50mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold

Material - Plating Termination	Matte Tin
Material - Resin	Polyamide
Net Weight	337.134/mg
Number of Rows	1
Orientation	Right Angle
Packaging Type	Tray
PC Tail Length	2.30mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	0.80mm
Pitch - Mating Interface	1.25mm
Plating min - Mating	0.380µm
Plating min - Termination	1.000µm
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Through Hole

This document was generated on Jan 24, 2024