




Part Number : 923150612

Product Description : Picoflex Surface Mount Latched Vertical Header with PCB Pegs, 14 Circuits, Tin (Sn) Plating, Black

Series Number : 90816

Status : Active

Product Category : PCB Headers and Receptacles

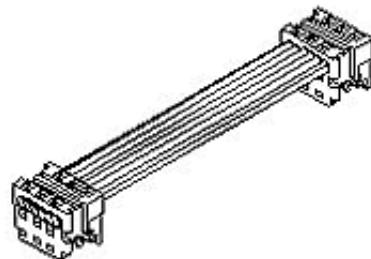

## Documents & Resources

### Drawings

Drawing 908160014\_sd.pdf

Packaging Design Drawing PK-90816-006-001.pdf

### 3D Models and Design Files

3D Model 908160014\_stp.zip

### Specifications

Application Specification 908140000-AS-000.pdf

Packaging Specification PK-90816-001-001.pdf

Product Specification PS-99020-0011-001.pdf

Test Summary TS-90816-001-001.pdf

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

## Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### **Part Details**

#### **General**

Status	Active
Category	PCB Headers and Receptacles
Series	90816
Description	Picoflex Surface Mount Latched Vertical Header with PCB Pegs, 14 Circuits, Tin (Sn) Plating, Black
Application	Signal, Wire-to-Board
Component Type	PCB Header
Product Family	Picoflex Ribbon-Cable Connectors
Product Name	Picoflex
UPC	883906498856

#### **Electrical**

Current - Maximum per Contact	1.2A
Voltage - Maximum	250V

#### **Physical**

Breakaway	No
Circuits (Loaded)	14
Circuits (maximum)	14
Color - Resin	Black
Durability (mating cycles max)	5
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	N/A

Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Nickel
Material - Resin	Nylon
Net Weight	0.687/g
Number of Rows	1
Orientation	Vertical
Packaging Type	Tube
PC Tail Length	1.05mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	0.076 $\mu$ m
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Partial
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Surface Mount

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
Picoflex PF-50 Low Profile IDT Receptacles	<u>90327</u>

---

### Global

Description	Part Number
Extractor Tool for Connectors	<u>0621006000</u>

