



1.View and size(视图及尺寸)

Main technical indicators(主要技术指标)	
1.Mating (插拔次数)	5000
2.Working Temperature (温度)	-25~+125 °C
3.IP Rating (防护级别)	IP 50
4.Diameter of socket end(插合端直径)	φ2.0MM
5.阻抗Ω	50
6.Vtest /工作电压	500V/AC
7.Rated Current (额定电流)	10A
8.Shell material(壳体材质)	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces /黄铜（镀铬）外壳和夹头螺母，镀镍黄铜锁套和中间件
9.Pin Material(插针材料)	Copper alloy gold plating(铜合金镀金)
10.Insulator material(绝缘体材质)	PTFE

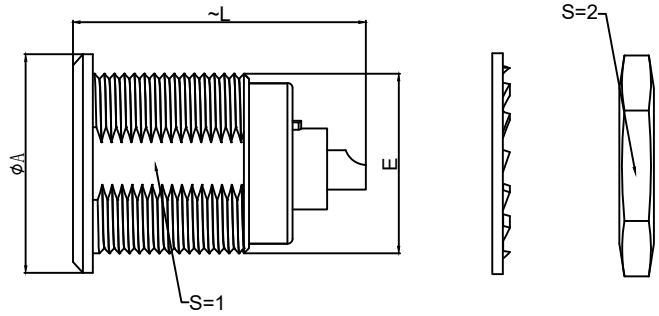


	A	L	E	S1	S2
MM	φ14	21.5	M12*1	10.5	14
in	φ0.55	0.85		0.41	0.55


Sum up(总结)	
Series(系列)	S
Shell style/model (外壳样式/型号)	ZRA: Fixed receptacle, nut fixing/固定插座，螺母固定
Button (按键)	-
Termination type (终止类型)	Mother solder tin同轴 50欧姆(焊锡)
Line diameter awg(线材直径)	0.00-0.00
Cable diameterφ (电缆直径)	0.00-0.00
Match plug(匹配插头)	TFA.1S.120.CLAC52H



Pane hole size (面板开孔尺寸)



Coaxial 50 ohms (solder) (同轴 50欧姆(焊锡))




Welded surface (焊接面)

Sum up(总结)	
Humidity (max)/湿度最大	<=95% [at 60 deg C /140 F] /<=95%[在60摄氏度/140摄氏度时]
Vibration/震动	15g [10 Hz - 2000 Hz]
Shock Resistance/抗冲击性	100 g [6 ms]
Climatical Category /气候类别	50/175/21
Salt Spray Corrosion/盐雾测试	>48 hr />48小时

	A	B	C√	ANGLE	
5-10	±0.02	±0.05	±0.1	0°-30°	±0.1°
50-100	±0.1	±0.15	±0.2	61°-90°	±0.5°
50-100	±0.15	±0.2	±0.25		
100-	±0.15%	±0.20%	±0.25%		

ZRA.1S.120.C T L

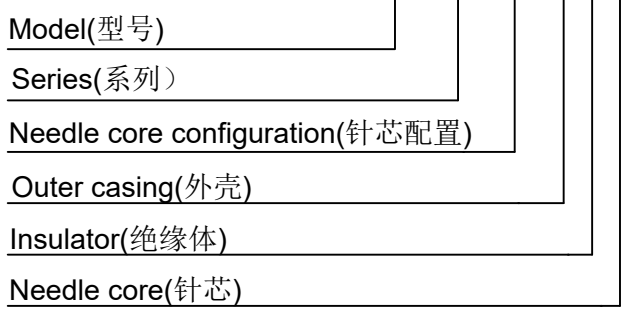

DESIGNED (设计)		DATE(日期)		SCALE(比额)	N/A(不适用)	MODEL TYPE 型号类型: ZRA.1S.120.CTL
CHECKED (校对)		DATE(日期)		VIEW(视图)		PART NO. 1S120-core socket 名称: 1S120同轴插座
APPROVED (审核)		DATE(日期)		UNIT(单位)	MM	DWG NO.:
REVISIONS				MATERIAL (材料)		
www.helloxkb.com www.helloxkb.cn			XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT(重量) SHEET(表) REVISION(修订) 1/1 A0