
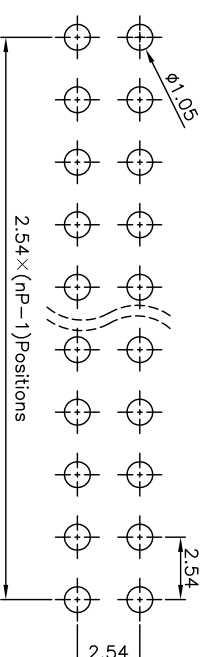


3D VIEW

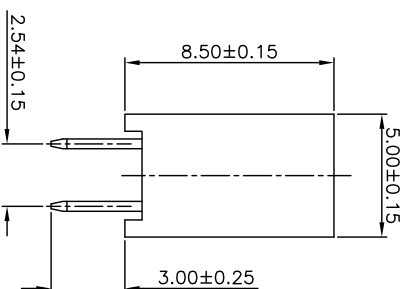


P.C.B LAYOUT

## SPECIFICATIONS

Rated Current : 3.0AMP  
 Contact Resistance : 20mΩ Max  
 Withstand Voltage : 500V AC/DC  
 Insulation Resistance : 1000MΩ Min  
 Operation Temperature : -40°C to +108°C

Contact Material : Brass  
 Contact Plating : Au or Sn Over Ni  
 Insulator Material : Polyester(UL94V-0)  
 Standard : PA6T  
 Max Processing Temp :  
 230°C for 5-10 seconds

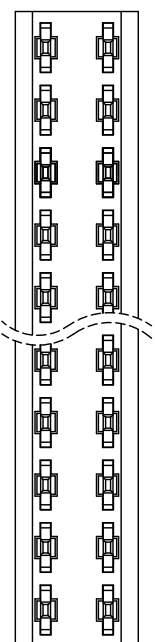

MODEL: F2.54-8.5×5.0-2×nP	DRAWN BY : Leiqin	DATE:
TITLE : 2.54间距8.5高直插Y型排母	CHECKED BY : Liwei	DATE:
DRAWING NO:	REV. : A	APPROVED BY: Wuxin
SHEET: 1 OF 1	SCALE: 3:1	SIZE: A4 UNIT : mm

GENERAL TOLERANCE: (UNLESS SPECIFIED)
X. ±0.30mm X. ± 3'
X.X ±0.25mm X.X ± 2'
X.XX ±0.20mm X.XX ± 1'
X.XXX±0.10mm X.XXX ± 0.5'

MEASURE POINT:  
 QUADRANT POINT (QP)  
 TANGENCY POINT (TP)  
 INTERSECTION POINT (IP)

NO:	PARTICULAR	BY	DATE
REVISIONS			



深圳市吉威电子有限公司  
 深圳市元吉威电子有限公司