ROHS

PIN NUMBER	1	2	3	4	5	6	7	8	9	SHELL
SIGNAL NAME	VBUS	D-	D+	GND	SSRX-	SSRX+	GND	SSTX-	SSRT+	SHIELD

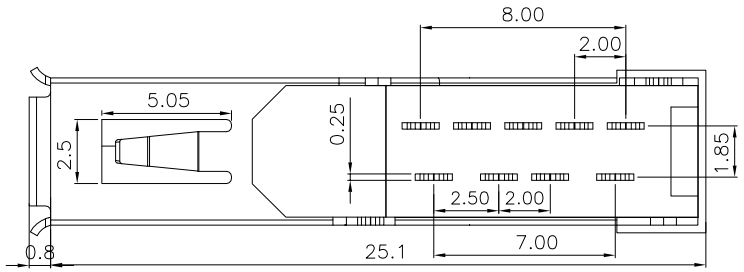

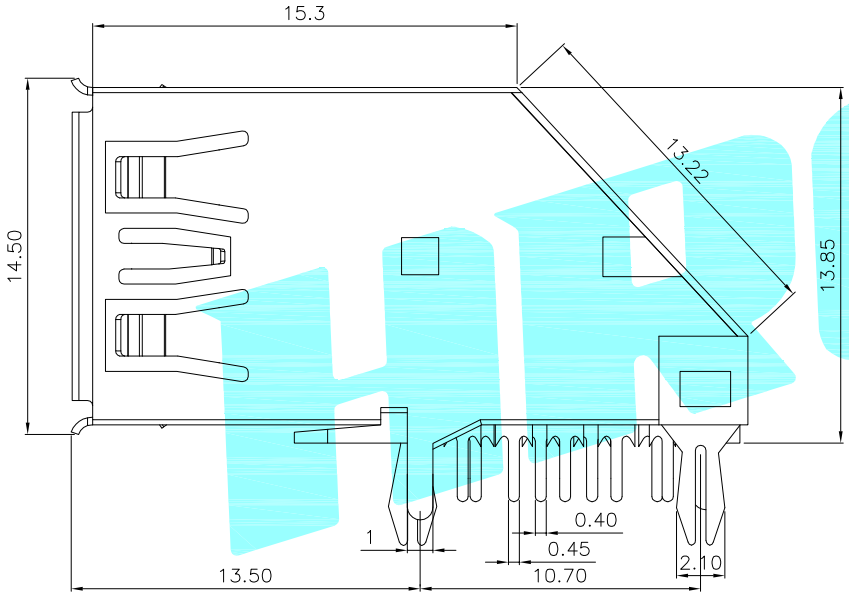

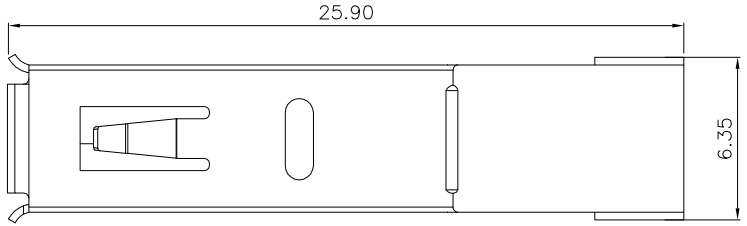

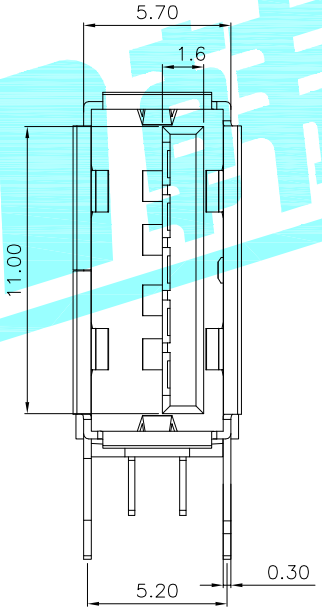

NOTES:
1.Specifications
1−1.INSERT FORCE:35N MAX.
1−2.WITHDRAW FORCE:10N MIN.INITIAL 8−20N AFTER
1−3.Current rating:1.0A
1−4.Voltage Rating:30V
1−5.Life Test:10000 CYCLES MIN.
1−6.:Dielectric withstanding:voltage100V AC MIN.
1−7.Contact resistance:30mΩ MAX.INITIAL;40mΩ MAX AFTER
1−8.Insulation resistance:100MΩ MIN
1−9.Temperature range:−30°TO +80°

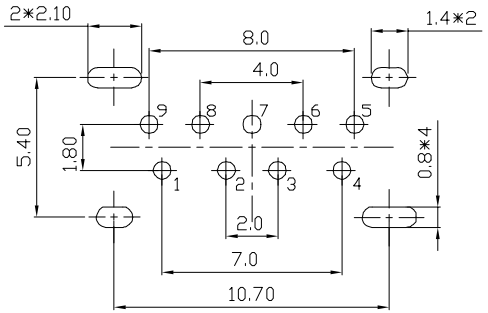

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
———	A	———	NEW	———	———	———

APPROVALS		DATE	HRO韩硕® ELECTRONICS CO.,LTD		
DRAWN	D.J.LV	2017/12/26			
CHECKED			TITLE:	USB CONNECTOR	
APPROVALS			PART NO.	U−A−39DD−Y−1	
TOLERANCES ARE	30~以上 ±0.30 / 10~30 ±0.20 / 5~10 ±0.15 / ~ 5 ±0.10	ANGLE ±2°	UNIT: mm	SCALE: 1:1	PROJ:
			DRAWING NO.	———	SHEET 1 OF 1