





RoHS

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au Or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

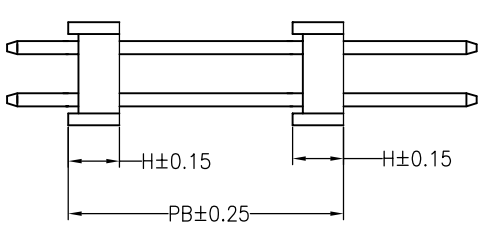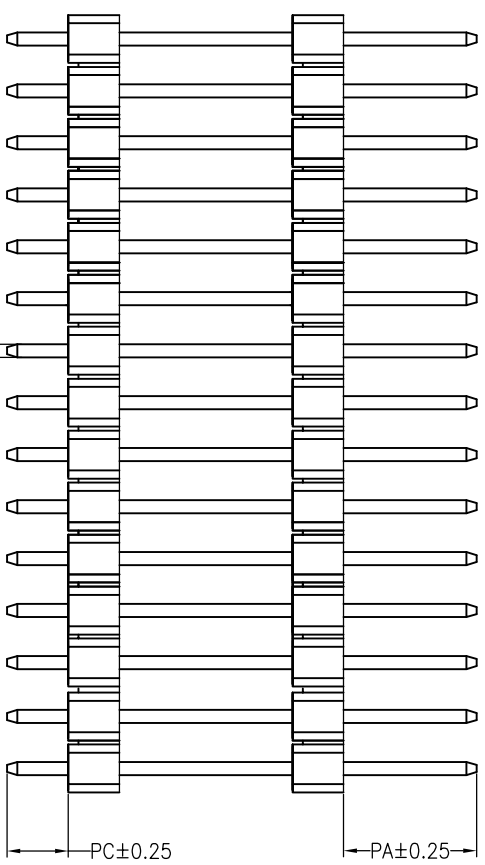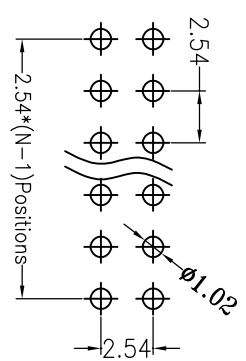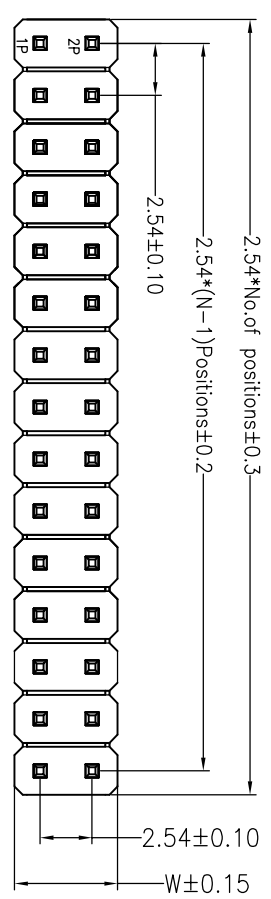

Ordering Information

P X X X X XX X XX X XXXX

产品类型
 P=排针
 1=1.27
 2=2.0
 3=2.54
 4=3.96
 5=1.0
 A=1.27*2.54

塑胶高度
 A=1.0
 B=1.5
 C=2.0
 D=2.5

排数
 1=单排
 2=双排
 3=三排
 4=四排

单排PIN数
 1~40P

产品形态
 1=DIP
 2=RA
 3=SMT
 4=SH
 5=贴片脚

塑胶材料
 1=PBT
 2=LCP
 3=PPS
 4=PA46
 9=PA9T

电镀厚度
 00=常规
 01="1u"
 02="2u"
 03="3u"

包装方式
 1=管装
 2=卷装
 3=盘装
 4=袋装
 5=盒装

序列号

Dimension antitheses list									
ITEM	PA	PB	PC	LL	L2	L3	H	W	
001	6.00	25.0	3.00	34.0			2.5	5.0	
Alternate									

深圳市连盛精密连接器有限公司

OPERATION		DRAW		SCALE		FIT		PART NO.		TITLE:	
X.X	±0.30			UNIT	FIT	UNIT	FIT	UNIT	FIT	SIZE	SHEET
X.XX	±0.20		CHECK	mm	A4	1/1		P3D206150042129	2.54PH 2H=2X2.5 2*6P DIP PA6.0 PB25.0	PC3.0 L=34.0 AU0.8U PA6T	
X.XXX	±0.10										
Angle	±5°										
DIM	TOL		APPROVE								

REV 1 DATE 2012.03.28 MODIFICATION DESCRIPTION NEW DRAWING CHANGE DIM