










DTC143ECA NPN Silicon Epitaxial Planar Digital Transistor

FEATURES

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

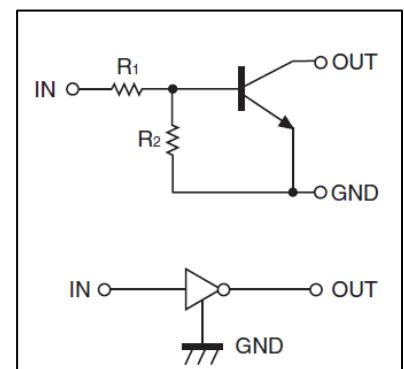

PIN CONNECTIONS and MARKING

DTC143EUA	SOT-323	DTC143EE	SOT-523
 1. IN 2. GND 3. OUT	 1. IN 2. GND 3. OUT	 1. IN 2. GND 3. OUT	 1. IN 2. GND 3. OUT
DTC143ECA	SOT-23	DTC143EKA	SOT-23-3L
 1. IN 2. GND 3. OUT	 1. IN 2. GND 3. OUT	 1. IN 2. GND 3. OUT	 1. IN 2. GND 3. OUT







MAXIMUM RATINGS(Ta=25°C unless otherwise noted)

Symbol	Parameter	Limits(DTC143E□)						Unit
			E	UA	CA	KA		
V _{CC}	Supply Voltage	50						V
V _{IN}	Input Voltage	-10~+30						V
I _O	Output Current	100						mA
P _D	Power Dissipation	150	200	200	200			mW
T _j	Junction Temperature	150						°C
T _{stg}	Storage Temperature	-55~+150						°C

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	V _{I(off)}	V _{CC} =5V,I _O =100μA	0.5			V
	V _{I(on)}	V _O =0.3V,I _O =20mA			3	V
Output voltage	V _{O(on)}	I _O /I _i =10mA/0.5mA			0.3	V
Input current	I _i	V _i =5V			1.8	mA
Output current	I _{O(off)}	V _{CC} =50V,V _i =0			0.5	μA
DC current gain	G _I	V _O =5V,I _O =10mA	20			
Input resistance	R ₁		3.29	4.7	6.11	kΩ
Resistance ratio	R ₂ /R ₁		0.8	1	1.2	
Transition frequency	f _T	V _O =10V,I _O =5mA,f=100MHz		250		MHz


Typical Characteristics

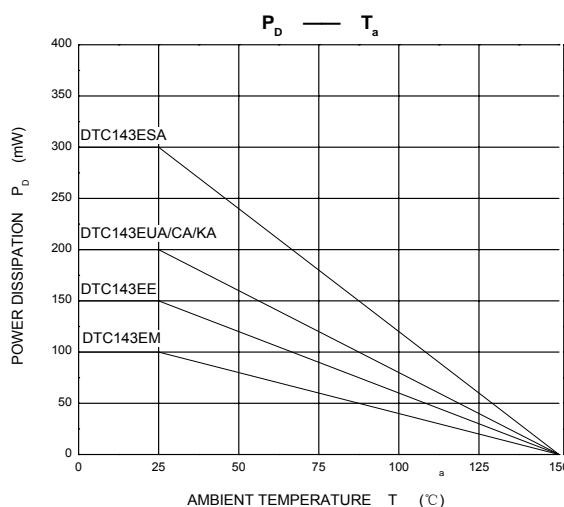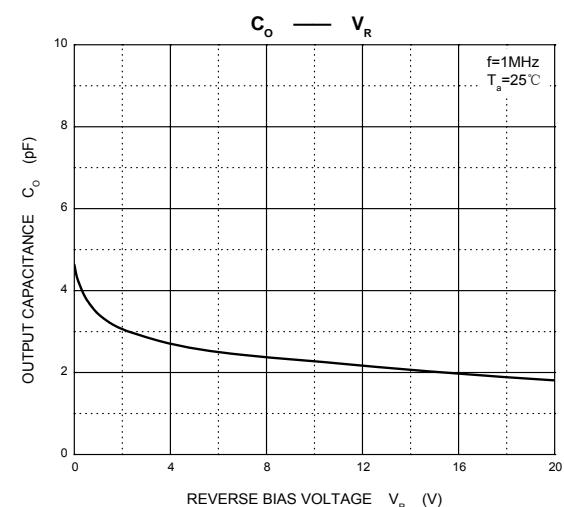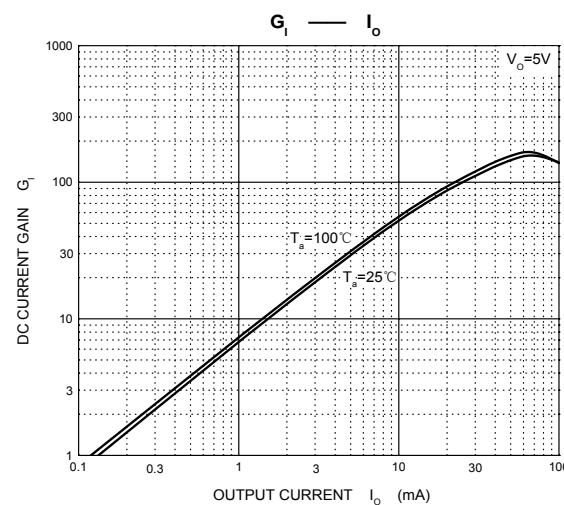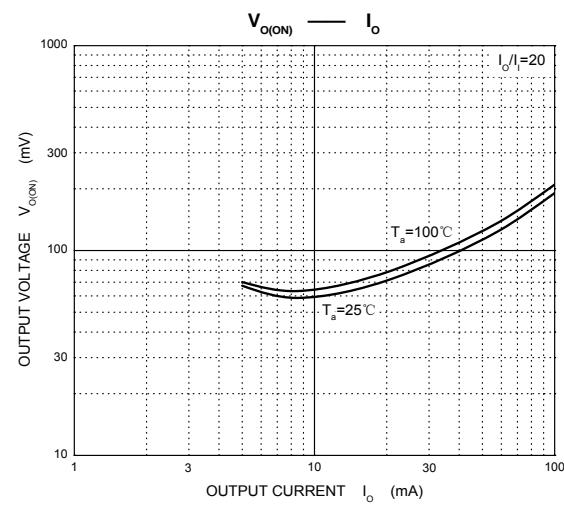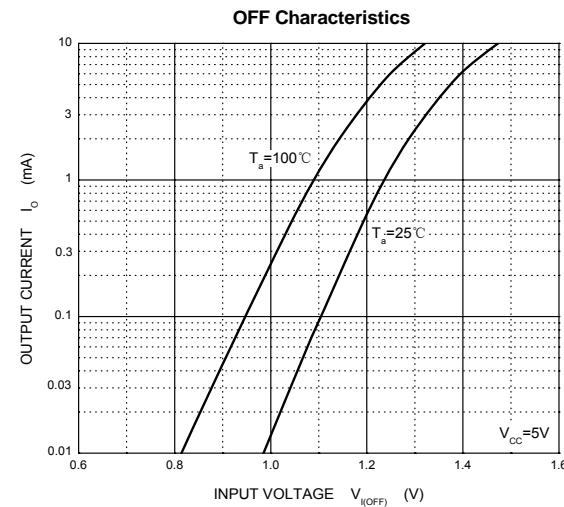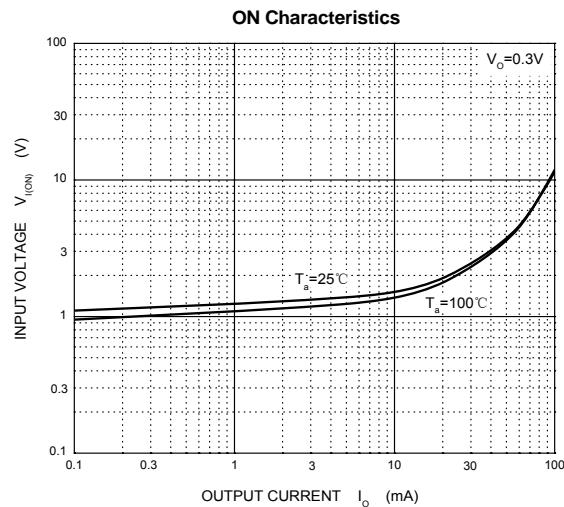

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

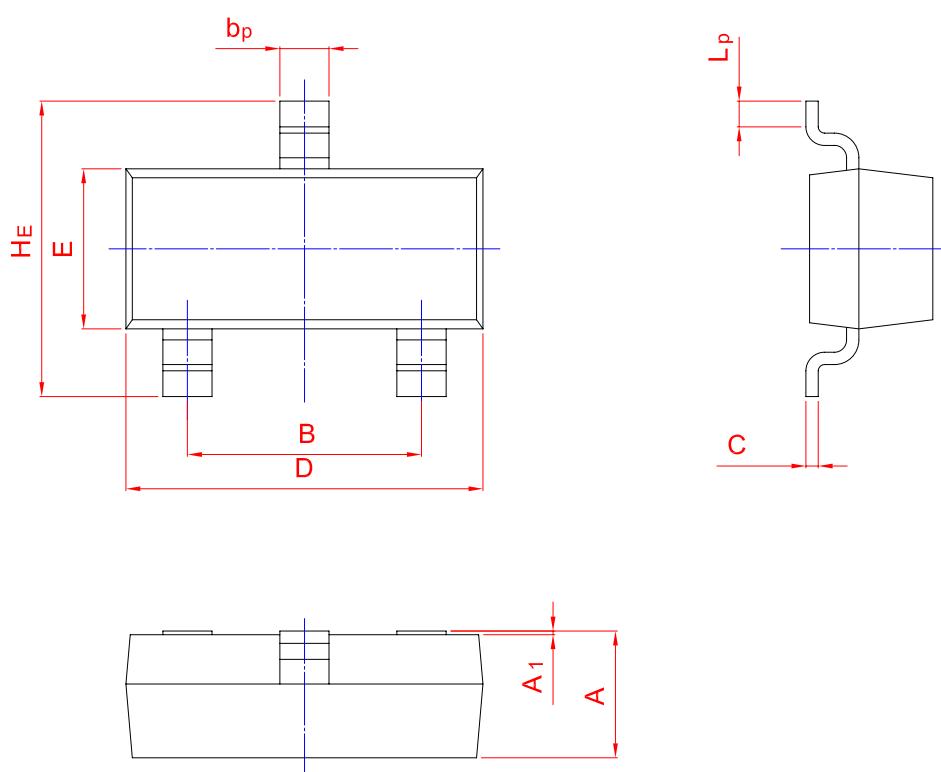

UNIT	A	B	b _p	C	D	E	H _E	A ₁	L _p
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20