
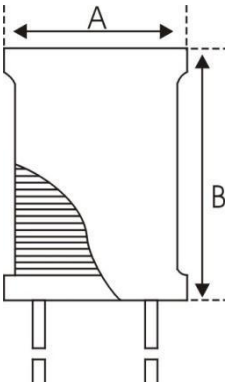
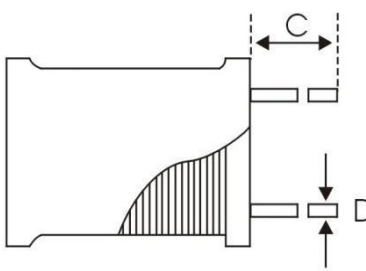



CUSTOMER		CUSTOMER'S P/S				
TSSUE DATE	2021. 07. 25	OUR P/N	XR6*8-222K-短脚			
1. 外观尺寸图 DIMENSIOS						
						
			A=7.5MAX B=10.0MAX C=3.5±0.5 D=Φ0.65±0.05 E=3.0±0.05			
2. 接线图 CONNECTION (BOTTOM VIEW)						
						
3. 绕线规格 WINDING SPEC						
端子 TERMINZL	线 WIRE	圈数 TURNS	绕线方式 WINDING METHOD			
S---F	Φ0.13 2UEW	310TS (REF)	CLOSED			
4. 电气特性 ELECTRONICS CHARACTERISTIC						
客户代码 Part No.	厂方代码 OUR Part No.	电感量 Inductance at 1kHz	直流电阻 D.C.R max.	定格电流 I.D.C max.	标识 Marking	规格代码 Sample No.
	XR6*8-222K	2.2mH±10%	6.8Ω	140mA	—	—
备注: OPERATING TEMP. : -40℃~+85℃ INDUCTANCE DROP=10% TYP. AT IDC.						
制作 DRW	审核 CHK	确认 APPD	东莞市祥如电子有限公司			
洪碧华	郑菊花	刘丰				
2021. 07. 25	2021. 07. 25	2021. 07. 25				



东莞市祥如电子有限公司

DONGGUAN XIANGRU ELECTRONICS CO., LTD

试产（样）报告

(TEST REPORT)

MODEL NO: XR6*8-222K				EVALUATED Q' TY: 10PCS						
产品型号:				试样数:						
WATERIAL CODE: DR 2W6×8				TESTED DATE: 2021. 07. 25						
磁材型号规格:				试制日期:						
D A T A 试 样 情 况 记 录	SPC 规格	L (uH)	DCR (Ω)							
	LOTS 序号	2. 2mH±10%	MAX 6. 8							
	1	2. 2	6. 29							
	2	2. 3	6. 17							
	3	2. 3	6. 32							
	4	2. 2	6. 22							
	5	2. 2	6. 38							
	6	2. 3	6. 13							
	7	2. 2	6. 24							
	8	2. 3	6. 25							
	9	2. 2	6. 38							
	10	2. 3	6. 57							
	11									
	12									
	13									
14										
REMARK: HM2801A HM2770A HP4342A VR-114 VR115										
备注: 1KHZ 0. 25V										
外观: UL外套, OK										
RESULTS: 判定:				制样员DRW		东莞市祥如电子有限公司				
☒ 合格 (PASSED) ☒ ROHS ☐ 非ROHS				洪碧华						
☐ 不合格, 改良后 (FAILED) 参照 (REF) _____				2021. 07. 25						