





RoHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au Or Sn Over Ni
Insulator Material:Polyester(Ul94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

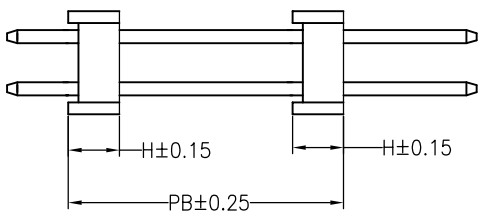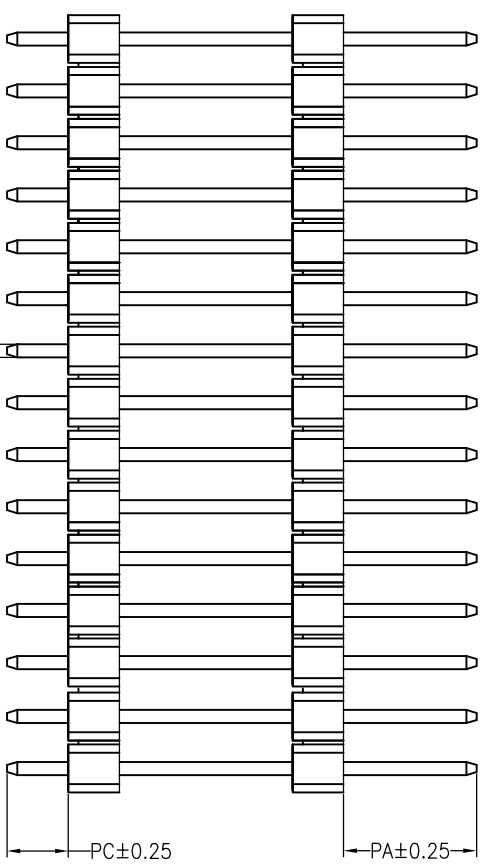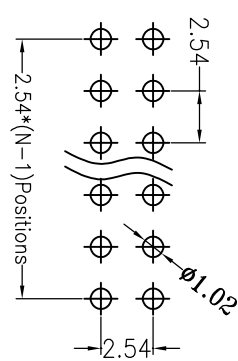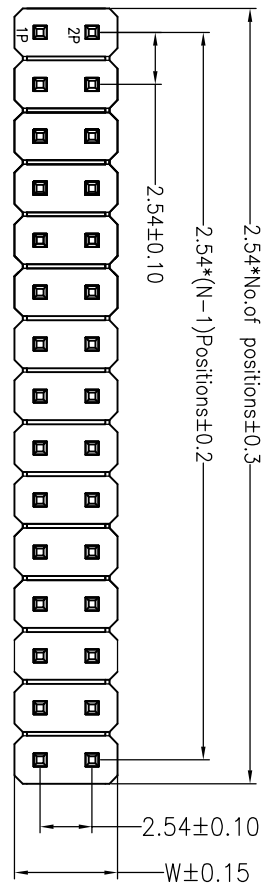

Ordering Information

P X X X X XX X X XX X XXXX

产品类型 间距 塑胶高度 排数 单排Pin数 产品形态 塑胶材料 电镀厚度 包装方式
 P=排数 1=1.27 A=1.0 1=单排 1~40P 1=DIP 1=FBT 00=常规 1=管装
 2=2.0 B=1.5 2=双排 1~40P 2=LCP 01=1u" 2=卷装
 3=2.54 C=2.0 3=三排 3=SMT 02=2u" 3=盘装
 4=3.96 D=2.5 4=SH 03=3u" 4=盘装
 5=1.0 5=PA6T 9=PA9T 5=盒装

序列号

Dimension notities list									
ITEM	PA	PB	PC	L1	L2	L3	H	W	
001	6.00	21.5	3.00	30.5			2.5	5.0	
Alternate									

深圳市连盛精密连接器有限公司

OPERATION		DRAW		SCALE		FIT		PART NO. P3D217150042130	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4				
X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:		2.54PH 2H=2X2.5 2*17P DIP PA6.0 PB21.5	
Angle	±5°			PROJ.				PC3.0 L=30.5 AU0.8U PA6T	
DIM	TOL								

REV A0 2012.03.28 NEW DRAWING DATE MODIFICATION DESCRIPTION CHANGE DIM

1 2 3 4 5 6 7 8 9