



REV.	MODIFICATION	ECN No.	NAME	DATE
A	新版发行		XIEKAIHUA	2018.06.10



**规格书: Specifications:**

**电气特性: Electrical:**

- 额定电流: Current Rating**  
1.5A/contact terminal
- 额定电压: Voltage Rating**  
30V DC
- 接触电阻: Contact Resistance**  
30 milliohms MAX
- 耐压: Dielectric Withstanding Voltage:**  
100 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:**  
100MEGA ohms MIN

**物理特性: Mechanical:**






- 插拔力: Connector Mate and Unmate Force**  
Mate force: 3.57kgf(MAX)  
Unmate force: 1.02kgf(MIN)
- 端子保持力: Terminal Retention**  
0.5kgf(MIN)

**原材料: Material:**

- 壳体: Housing:**  
High Temperature Plastic,  
LCP White/Black
- 端子: Contact: Copper Alloy C2680/c5191**
- 壳体: Shell: Copper Alloy C2680/SUS**

**电镀: Finished:**

- 端子: Contact: Plated Gold in Mating Area;  
Matte Tin On Solder Tails**
- 壳体: Shell:  
Plated Matte tin, Salt spray test: 24 hours**

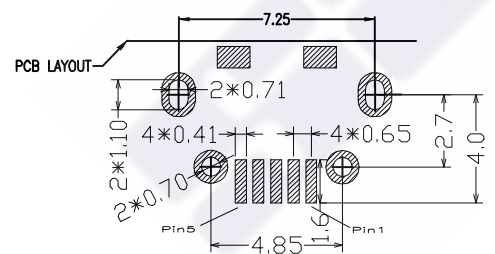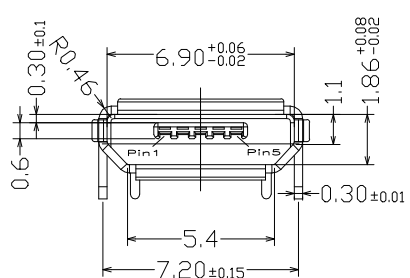

RECOMMENDE.P.C.B LAYOUT(TOP VIEW)  
EFAULT YOLERANCE:±0.05

三佐部品【中国】股份有限公司

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.	.X: ±0.20	.X': ±1.5°	INTENDED USE:	TITLE:
	.XX: ±0.10	.XX': ±1.0°	CONNECTOR	MICRO 5P B TYPE 四脚全插板间距4.85端子1.2
	.XXX: ±0.05	.XXX': ±0.5°	APPD.: LIUXIAO	PART NO.: SEE TABLE
	MAT'L: SEE NOTES		CHKD.: CHENJUNMING	DWG. NO.: MTKBP05WD2AWWYGIN
FINISH:		DR.: LILIANJIANG	SCALE: 1:1	PAGE: 1/1
			UNIT: mm	REV.: A