
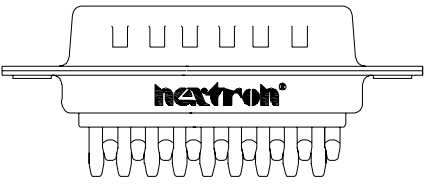


SPECIFICATIONS:
 Current rating:3.0A AC/DC
 Voltage rating:250V AC/DC
 Contact resistance:30m ohm MAX
 Insulation resistance:5000M ohm MIN
 Withstanding voltage:1000V AC for one minute
 Operating temperature range:-40°C ~ +85°C

MATERIAL AND FINISH
 Insulator:PBT+30%G.F(UL94V-0)
 Contact:Copper Alloy Nickel Undercoated
 Selective Gold Plated
 SHELL:Metal Iron With Tin Plated

POS. NO.	A	B	C	D	E	F	G
78P	52.86	61.10	67.10	2.41	11.11	12.50	
62P	55.42	63.50	69.32	2.41	8.36	12.50	57.30
44P	38.96	47.04	53.04	2.29	8.36	12.50	41.10
26P	25.25	33.32	39.14	2.29	8.36	12.50	27.50
15P	16.92	24.99	30.81	2.29	8.36	12.50	

PART NO.:
 Z-SUB HB * M * * 2 * * * *
 NO. OF CONTACTS
 B=15PIN
 D=26PIN
 F=44PIN
 G=62PIN
 H=78PIN
 HOUSING TYPE
 M=Male
 MOUNTING OPTIONS
 1=RIVETED W/SHIELD ONLY
 2=RIVETED W/FRONT RIVET
 3=RIVETED W/REAR RIVET
 4=RIVETED W/FRONT RIVET REAR RIVET
 MARK
 0=NO LOGO
 1=NEXTRON LOGO
 INSULATOR COLOR
 0=BLACK
 6=BLUE
 9=WHITE
 INSULATOR MATERIAL
 0=PBT
 2=NYLON
 CONTACT PLATED:(CONTACT AREA)
 A=GOLD 1u"/Light Tin
 B=GOLD 3u"/Light Tin
 C=GOLD 5u"/Light Tin
 E=GOLD 15u"/Light Tin
 F=GOLD 30u"/Light Tin
 CONTACTS MATERIAL
 2=BRASS
 NUT POST HEIGHT(H)
 0=5.8mm(STD)
 1=4.8mm

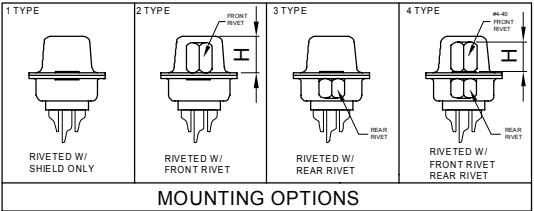

REV.	DESCRIPTION	DATE	ANGLES
B	ECN-19105 $\Delta \approx 1$	2019/11/14	
A1	ADD LOGO MARK	2017/05/04	
			$X^\circ \pm 3^\circ$

UNITS:	SIZE	NAME:	TITLE:		
mm inch	A3	D-SUB HB TYPE MALE	CUSTOMER DWG		
GENERAL TOLERANCE: (UNLESS SPECIFIED)		PART NO: Z-SUBHBXMX2XXXX	DWG NO: 010-0000-E23		
4 PLACE	$\pm **$	APPD:	SCALE SHEET REV. 1/1 1/1 B		
3 PLACE	$\pm **$	CHKD:			
2 PLACE	± 0.20	DRAW:	DESIGN: Lu陳惠枝 2019/11/14		
1 PLACE	± 0.30				