

**SPECIFICATIONS**

Rated(额定参数): 300V,15A  
 Dielectric strength(抗电强度): AC2000V/1 Minute  
 Insulation Resistance(绝缘电阻):1000MΩ Min  
 Contact Resistance(接触电阻):20mΩ Max  
 Screw Torque(扭矩): 0.5Nm (4.4l.b.in)  
 Wire Range(线径):1.4~2.2AWG  
 Temp. range(操作温度): -40°C~+105°C  
 MAX Soldering(瞬时温度):+250°C,5s




Housing Material(塑件): PA66 (UL94 V-0)  
 Contact(端子): Brass, Tin plating(黄铜镀锡)  
 Screw (螺丝): M3.0, Steel, Ni plating(钢, 镀锌)

PITCH RANGE		NOMINAL DIMENSION RANGE					
IN MM		IN MM		IN MM		IN MM	
OVER	TO	OVER	TO	OVER	TO	OVER	TO
6	10	30	60	100	150	150	150
10	24	60	100	150	150	150	150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

**Ordering Information**

**JL25C - 762 XX B X 1**

Pitch 762=7.62PH  
 No. of pins 2P~26P  
 Housing Color  
 B=Black  
 G=Green  
 U=Blue  
 R=Red  
 W=White  
 Y=Yellow  
 O=Orange  
 F=Grey  
 Packing  
 O=Pe bog  
 T=Tube  
 A=Tray

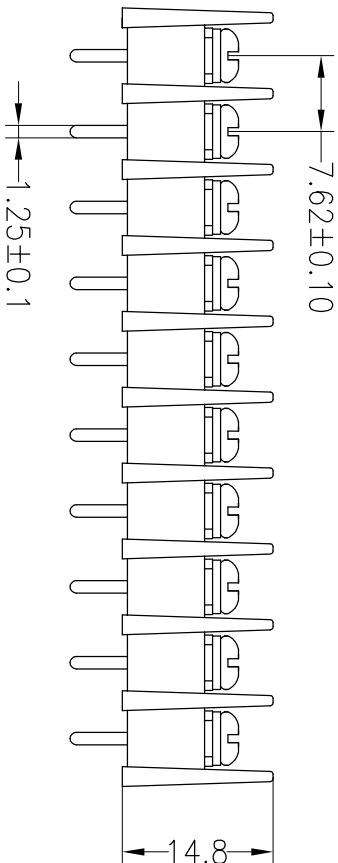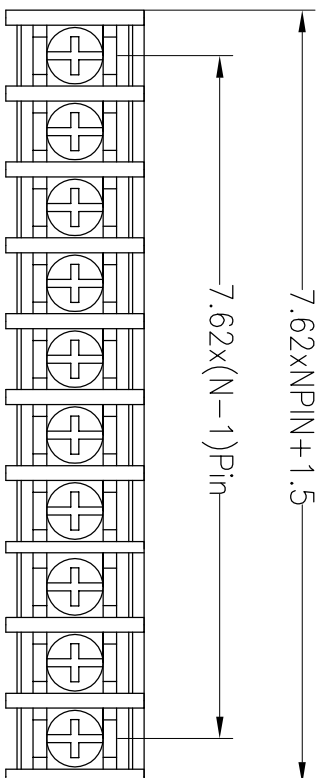

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	BEN	17.01.04	SCALE	FIT	PART NO.	TITLE:
A0	2017.01.04	NEW DRAWING		XX ±0.30	CHECK			UNIT	mm	JL25C-762XXBX1	7.62mm Barrier Terminal Blocks
				X.XX ±0.20				SIZE	A4		
				X:XXX ±0.10				SHEET	1/1		
				Angle ±3'	APPROVE			PROU.			
1				DIM							
2				TOL							
3											
4											
5											
6											
7											
8											
9											

**JILN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992