



RoHS

版本 REV	变更事项 CHANGE CONTENT	依据 THERUNDER	变更日期 DATE
A0			

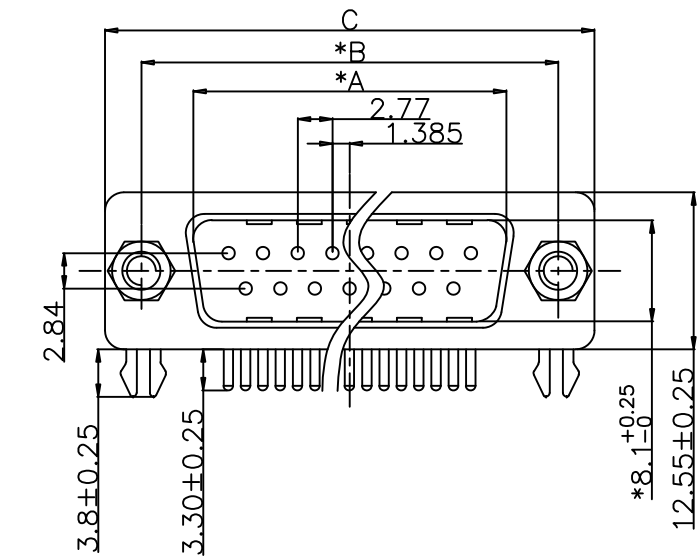

PO(XXX)	A ±0.25	B ±0.13	C ±0.38	D ±0.25
009	16.92	24.99	30.81	19.28
015	25.25	33.32	39.14	27.51
025	38.96	47.04	53.04	41.28
037	55.42	63.50	69.32	57.71



NOTICE :

1. ELECTRIC:

- DIELECTRIC RATING: 300V
- CONTACT CURRENT RATING: 3AMP
- CONTACT RESISTANCE: 15mΩ MAX.
- INSULATION RESISTANCE: 1000MΩ MIN. at 500V DC
- DIELECTRIC STRENGTH: 500V AC RMS for 1Minute
- OPERATION TEMPERATURE: -55C° ~125C°

2. MATERIAL:

- INSULATOR: PBT+30% G. F(UL94V-0)
- CONTACT: COPPER ALLOY
- CONTACT PLATED:GOLD FIASH OVER NICKEL
- SHELL: SPCC
- SHELLPLATED:NICKEL/TIN
- BRACKET:PBT+30% G. F(UL94V-0)

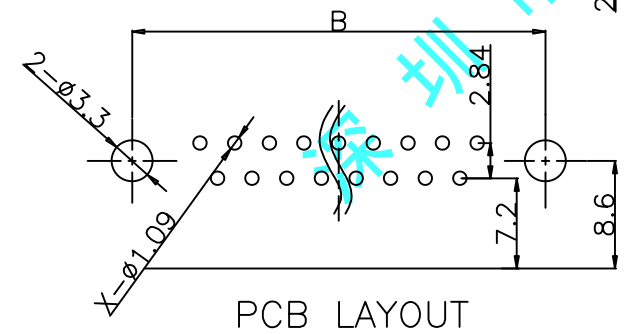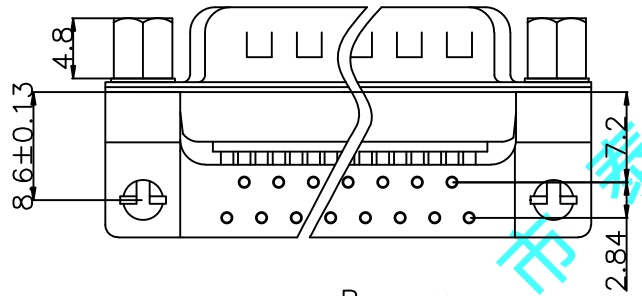

PCB LAYOUT

		单位 UNIT	mm	深圳市泰华电子有限公司 <b>TaiHua Electronics Co.,Ltd</b>			
x. ±0.5	x.*±	比例 SCALE					
.x±0.30	.x*±	核准: APPROVED BY	版本: A0		产品名称 Production name	DR XP 公 弯韩版式御塑胶支架 锁4-40UNCx4.8螺丝 H=7.2	
.xx±0.20	.xx*±	审核: CHECKED BY	页次: 1/1		产品料号 Product No	TH-DR XP (不带螺丝)	
.xxx±0.005	.xxx*±	制图: DRAWN BY	封文辉 2022.12.05		日期:	客户料号 Client No	