





# RoHS

## SPECIFICATIONS

Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au Or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

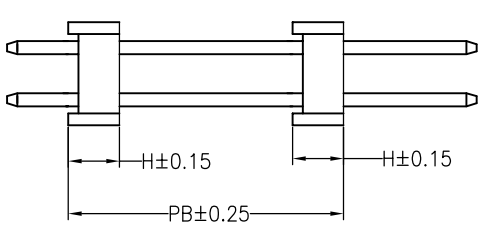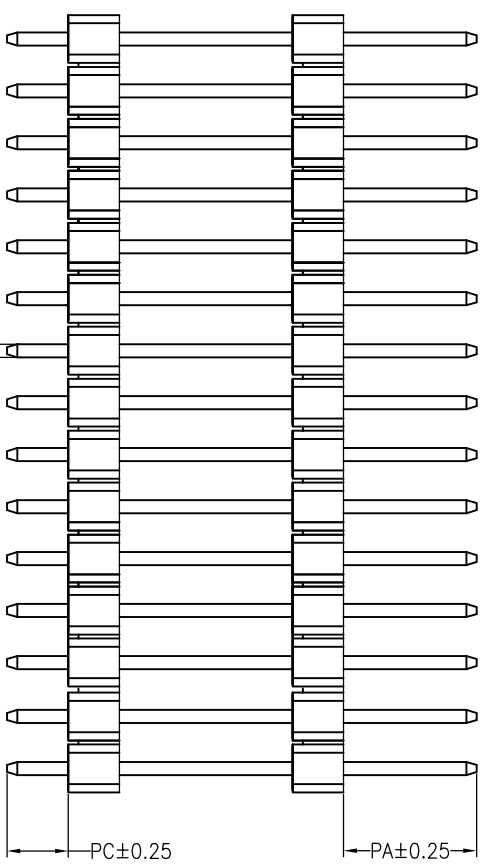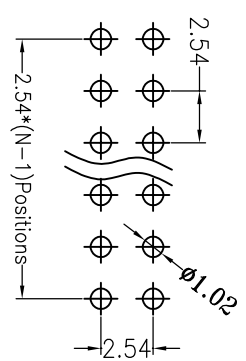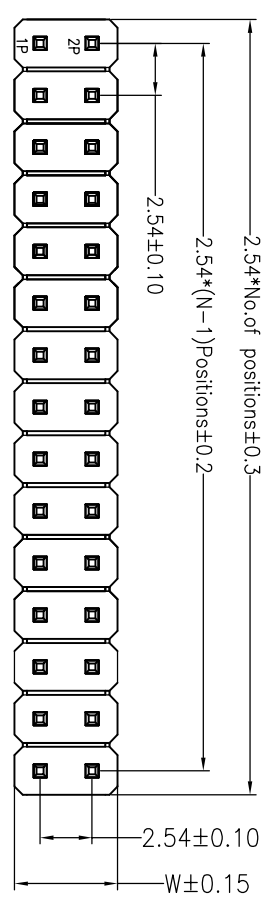

## Ordering Information

P X X X X XX X X XX X XXXX

**产品类型**  
 P=排针  
 1=1.27 间距  
 2=2.0  
 3=2.54  
 4=3.96  
 5=1.0  
 A=1.27\*2.54

**塑胶高度**  
 A=1.0  
 B=1.5  
 C=2.0  
 D=2.5

**排数**  
 1=单排  
 2=双排  
 3=三排  
 4=四排

**单排PIN数**  
 1~40P

**产品形态**  
 1=DIP  
 2=RA  
 3=SMT  
 4=SH  
 5=贴片脚

**塑胶材料**  
 1=PBT  
 2=LCP  
 3=PPS  
 4=PA46  
 9=PA9T

**电镀厚度**  
 00=常规  
 01="1u"  
 02="2u"  
 03="3u"

**包装方式**  
 1=管装  
 2=卷装  
 3=盘装  
 4=袋装  
 5=盒装

**序列号**

Dimension notations list									
ITEM	PA	PB	PC	LL	L2	L3	H	W	
001	6.00	21.5	3.00	30.5			2.5	5.0	
Alternate									

深圳市连盛精密连接器有限公司

OPERATION		DRAW		SCALE		FIT		PART NO.		TITLE:	
X.X	±0.30			UNIT	FIT	UNIT	FIT	UNIT	SIZE	SHEET	PROJ.
X.XX	±0.20	CHECK		mm	A4	1/1		P3D211150042130	2.54PH 2H=2X2.5 2*11P DIP PA6.0 PB21.5		
X.XXX	±0.10								PC3.0 L=30.5 AU0.8U PA6T		
Angle	±5°	APPROVE									
DIM	TOL										

REV A0 2012.03.28 NEW DRAWING DATE MODIFICATION DESCRIPTION CHANGE DIM