

RoHS&REACH

ECN NO.	DESCRIPTION	DATE
A-1	修改外形及尺寸	2020.11.14
A-2	更新图面细节	2021.11.20

材料Material:




- 外壳材质: PBT, PA66, PA46 (UL 94V-0)  
Housing Material: PBT, PA66, PA46 (UL 94V-0)
- 触点材料: 圆针直径0.46mm磷青铜; 镀镍后镀金  
Contact Material: Round Pins-0.46mm Diameter Phosphor Bronze; Gold Plating Over Nickel

电气Electrical


- 额定电压: 交流125伏  
Voltage Rating : 125 VAC Rms
- 额定电流: 1.5安培  
Current Rating: 1.5 AMP
- 接触电阻: 最大30毫欧  
Contact Resistance: 30 Milliohms MaX
- 绝缘电阻: 直流500V下, 绝缘最小500兆欧  
Insulation Resistance: 500 megohms min @500V DC
- 绝缘耐压: 交流60Hz 1000V下, 1分钟  
Dielectric Withstanding Resistance: 1000V AC Rms 60Hz. 1Min
- 耐久: 插拔750次以上  
Durability: 750 Cycles Min
- 工作温度: -40℃~+85℃  
Operation Temperature: -40℃~+85℃

5201 - X X X X X X

Positions	Contacts	Panel	Plastic	Color	Gold Plating
8	2/4/6/8	0-w/0 Panel 1-w/Panel	1-PBT 2-PA66 3-PA46	1-Black 2-Gray 3-Other	1-G/Fu" 2-3u" 3-6u" 4-15u" 5-30u" 6-50u"

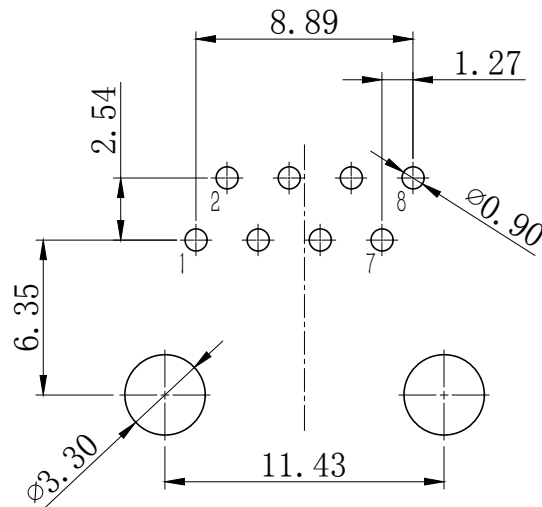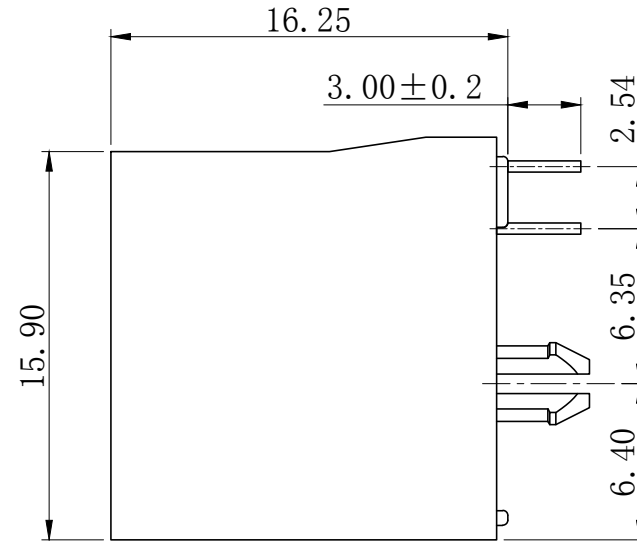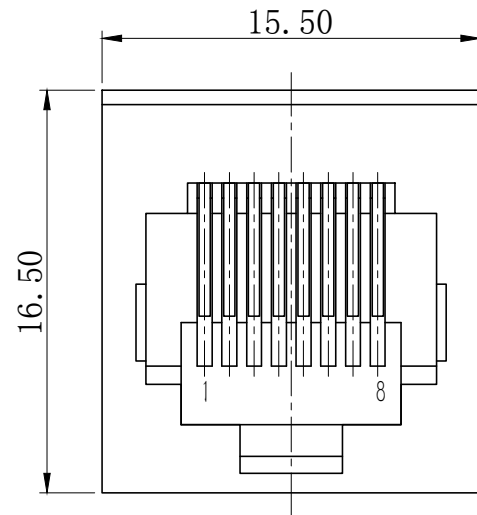

PCB LAYOUT  
(Top View)

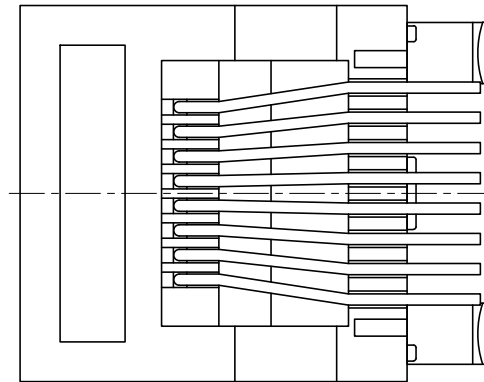

未注公差		设计	X.C.S	比例	1:1
尺寸标注	公差				
		长度	角度	审核	单位
X.	±0.25	±2.0°			
.X	±0.20	±1.5°	批准	图幅	A4
.XX	±0.15	±1.0°			
.XXX	±0.10	±0.5°	角法	图数	第1页 共1页

**H** 恒连电子科技有限公司  
EVERCOM ELECTRONIC TECHNOLOGY CO., LTD  
<http://www.chinarj45.com>

产品型号 5201 8P8C 无边  
产品编号 5201-880XXX  
图纸编号 HL2152A8801