


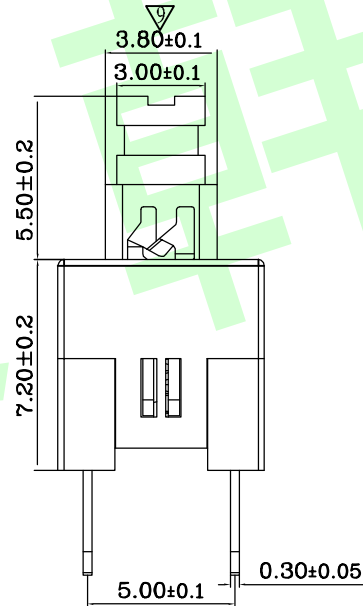


印刷电路板焊接处尺寸图

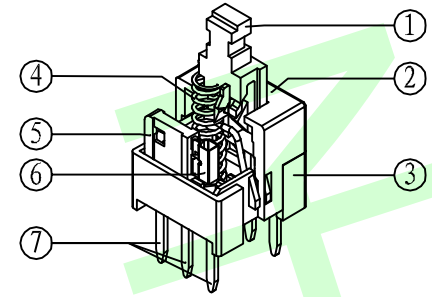

电路图

技术参数

1. 额定电流: DC30V 0.1A
2. 接触阻抗: 100mΩ Max
3. 绝缘阻抗: 100MΩMin (DC500V)
4. 耐高压: 交流250伏 (50-60赫兹) 持续1分钟
5. 操作力: 230 ± 50gf
6. 寿命: 10,000次.
7. 行程: 2 ± 0.2 mm
8. 运行类型: 自锁/无锁

⑦	端子		6	黄铜 (H65 C2680) (T=0.30)	镀银 (Ag)
⑥	簧片		2	磷铜 (Ag C5210) (T=0.05)	复银
⑤	注塑端子		2	PA66+G/F33 (G3300L) UL94	黑色
④	弹簧		1	钢丝 (SW-C)	素材
③	底座		1	PBT+G/F20 (3020) UL94	黑色
②	盖子		1	POM (F20-03) UL94	灰色
①	导芯		1	POM (F20-03) UL94	蓝色
序号	产品型号	端子编号	数量	材料	备注

Dongguan Usakro Electronic Technology Co., Ltd.

			角度	±2°		design	date		name	UK-G0704-WS-G2
			30 - 20	±0.30		Review	date			
			20 - 10	±0.25		Approved	date		name	功能: 自锁/无锁
			L<=10	±0.20	Drawing number:					
modify	Review	Approved	Tolerance not specified	Proportion	1:1	unit	mm	gape number		A4