



# 承认书

## SPECIFICATION FOR APPROVAL

|                       |                       |
|-----------------------|-----------------------|
| 客户名称 Customer Name:   | 立创商城                  |
| 供应商物料名称 Part Name:    | 石英晶体谐振器               |
| 产品描述 Description:     | SMD1612 40.000MHz/8pF |
| 供应商物料料号 Part NO.:     | SX0B40.000F0810F30    |
| 供应商名称 Supplier Name : | 深圳市星通时频电子有限公司         |

PLEASE CONFIRM OUR SPECIFICATION. 敬请确认规格书之内容。

| CUSTOMER APPROVAL 客户审批     |     |     |
|----------------------------|-----|-----|
| 物料代号 PART NO. _____        |     |     |
| 使用于机型 USED IN MODEL: _____ |     |     |
| 工程部                        | 品质部 | 采购部 |
|                            |     |     |

(敬请承认后返回一份, 谢谢!)

| SUPPLIER APPROVAL 供应商审批 |         |             |
|-------------------------|---------|-------------|
| DGN.制表人                 | CKD. 校对 | APPD. 审核、签章 |
| 吴丽红                     | 李霞      | 胡华才         |

地址: 深圳市南山区龙珠四路方大城T2栋10楼

Add: 10 / F, Building T2, Fangdacheng, Longzhu 4th Road, Nanshan District, Shenzhen, China.

Website: [www.sctf-crystal.com](http://www.sctf-crystal.com)

Email: [info@sctf-crystal.com](mailto:info@sctf-crystal.com)

TEL: 0755-86097430

FAX: 0755-86097259

Page: 1



## ■ QUARTZ CRYSTAL UNIT SPECIFICATION

### 1. Crystal Unit Spec:

| N0. | Item                              | Symb.                                                                       | Electrical Spec.         | Notes                                                     |
|-----|-----------------------------------|-----------------------------------------------------------------------------|--------------------------|-----------------------------------------------------------|
| 1   | Nominal Frequency<br>标称频率         | f                                                                           | 40.000000 MHz            |                                                           |
| 2   | Oscillation Mode<br>振荡模式          |                                                                             | AT Fundamental           |                                                           |
| 3   | Holder Type<br>封装                 |                                                                             | SMD1612                  |                                                           |
| 4   | Frequency Tolerance<br>常温频差       | $\Delta f/f$                                                                | $\pm 10\text{ppm}$       | at 25°C $\pm 2^\circ\text{C}$                             |
| 5   | Drive Level<br>激励功率               | DL                                                                          | 10 $\mu\text{W}$ Typical | See the 2.1                                               |
| 6   | Load Capacitance<br>负载电容          | CL                                                                          | 8pF                      | See the 2.2                                               |
| 7   | Effective Resistance<br>谐振电阻      | RR                                                                          | 80 $\Omega$ max.         | See the 2.3                                               |
| 8   | Shunt Capacitance<br>静电容          | C0                                                                          | 3 pF Max.                |                                                           |
| 9   | Drive Level Dependency<br>激励功率依赖性 | DLD2                                                                        | 20 $\Omega$ max.         | Sweep from 100nW to 100uW in 20 steps.                    |
| 10  | Temperature Drift<br>温度频差         | f_tem                                                                       | $\pm 30\text{ppm}$       | Over Operating Temp. Range (Reference 25°C)               |
| 11  | Spurious response<br>寄生响应         | SPDB                                                                        | -3dB max.                | Start -1000ppm stop 5000ppm 30 steps power applied: 10dBm |
| 12  | Operating Temperature<br>工作温度范围   | T_use                                                                       | -40~85°C                 |                                                           |
| 13  | Storage Temperature Range<br>存储温度 | T_stg                                                                       | -55~125°C                |                                                           |
| 14  | Insulation Resistance<br>绝缘阻抗     | IR                                                                          | 500 M $\Omega$           | at DC 100V                                                |
| 15  | Aging<br>年老化率                     | f_age                                                                       | $\pm 3\text{ ppm}$       | 1st Year                                                  |
| 16  | Measurement Condition<br>测量条件     | Measured by S&A250B or equivalen,TA=25°C $\pm 2^\circ\text{C}$ , RH=40%~70% |                          |                                                           |

### 2. Circuit Coditions Spec:

2.1 Drive Level (DL) 100 $\mu\text{W}$  max.

(If Drive Level is too high,that may cause crystal resonator abnormal oscillation or damagaed the main body of quartz)

2.2 Loading Capacitance (CL) : 8pF

(The total circuit load capacitance should be equal to the crystal (CL) values, too large or too small load, will result in frequency drift.)

2.3 Negative Resistance (-R)  $\geq 400\Omega$


(If -R more than ESR spec of 5 times will be better. If Negative Resistance is too low, that may cause crystal resonator stop oscillation or not easy to oscillate)

| SHENZHEN SCTF ELECTRONICS CO. , LTD |                                                    |       |
|-------------------------------------|----------------------------------------------------|-------|
| DATE                                | Specification of quartz crystal<br>石英晶体谐振器规格书      | Page: |
| 2023/5/22                           | P/N: SX0B40.000F0810F30<br>Spec.NO.: SCTF202305321 | 3     |


# ■ DIMENSIONS

Product size (产品尺寸)

Units (单位): mm(毫米)

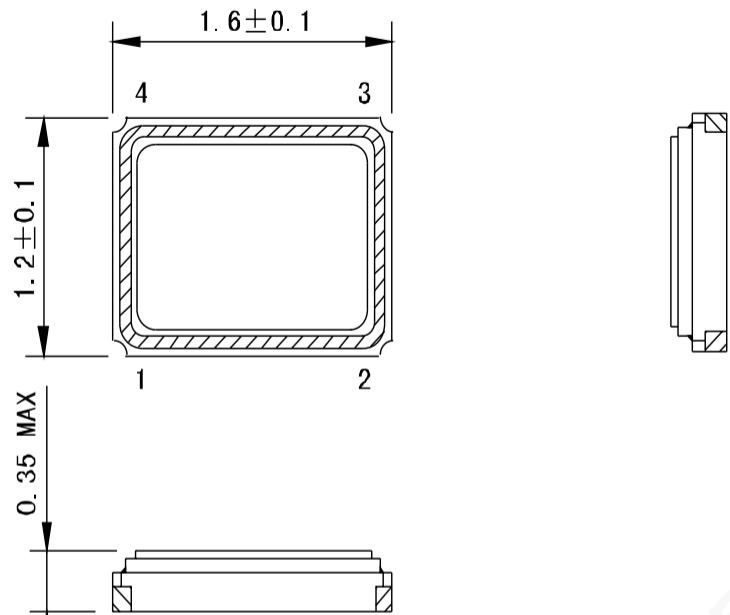

Pad size (焊盘尺寸)

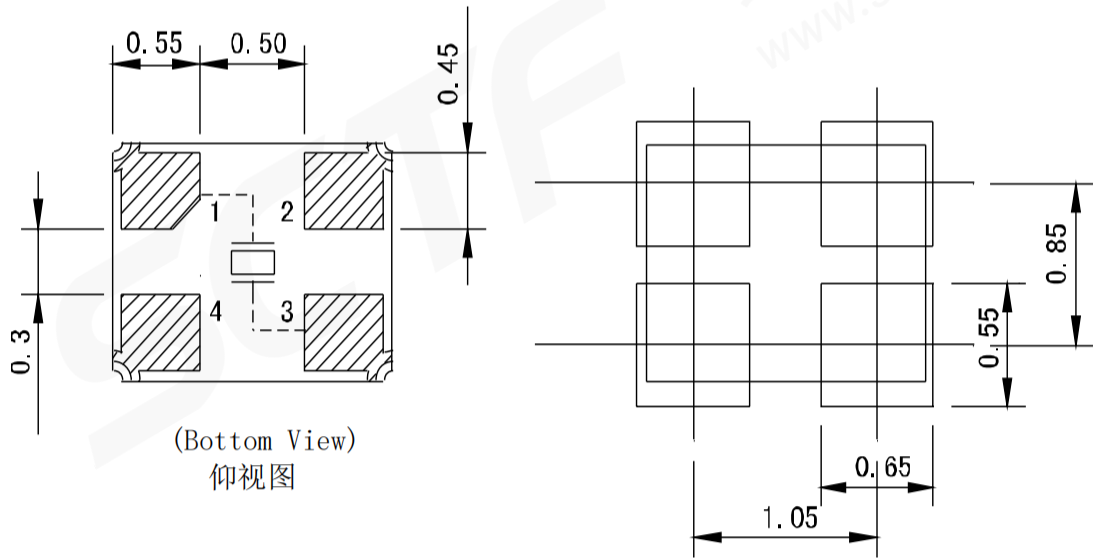


suggested solder pad layout

Note: #2, #4 is connected with a cover  
(Please connect with GND or floating.)


| SHENZHEN SCTF ELECTRONICS CO. , LTD |                                                    |       |
|-------------------------------------|----------------------------------------------------|-------|
| DATE                                | Specification of quartz crystal<br>石英晶体谐振器规格书      | Page: |
| 2023/5/22                           | P/N: SX0B40.000F0810F30<br>Spec.NO.: SCTF202305321 | 4     |

■ **PRODUCT STRUCTURE & MARKING**

◆ **Product Structure**产品结构

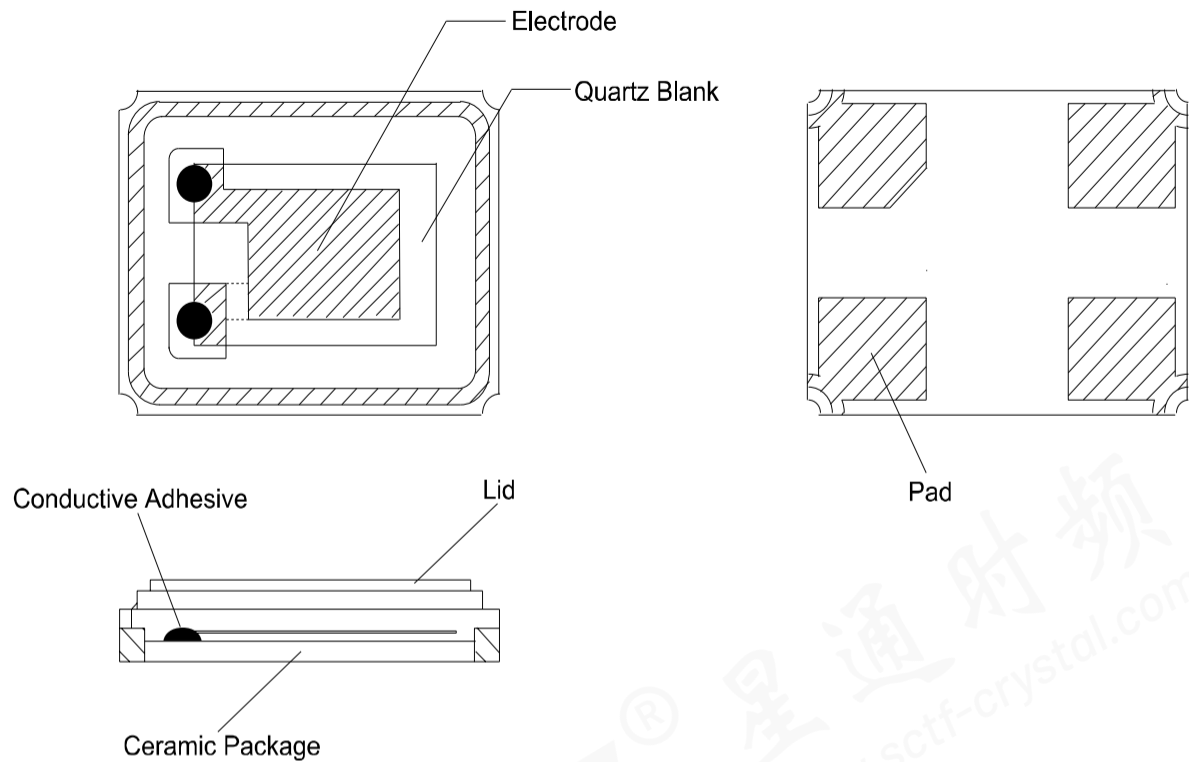


◆ **Marking**印字

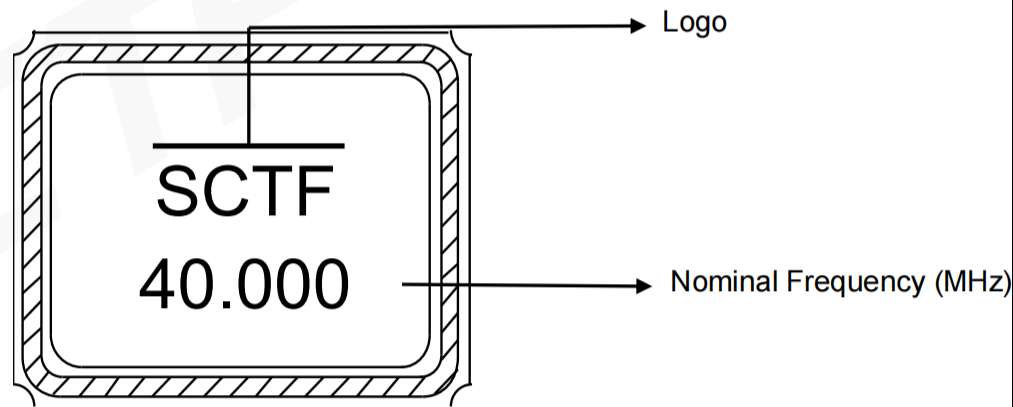

| SHENZHEN SCTF ELECTRONICS CO. , LTD |                                                    |       |
|-------------------------------------|----------------------------------------------------|-------|
| DATE                                | Specification of quartz crystal<br>石英晶体谐振器规格书      | Page: |
| 2023/5/22                           | P/N: SX0B40.000F0810F30<br>Spec.NO.: SCTF202305321 | 5     |

## REFLOW PROFILES

| Profile Feature                                                   | Sn-Pb Eutectic Assembly | Pb-Free Assembly |
|-------------------------------------------------------------------|-------------------------|------------------|
| Preheat/Soak                                                      |                         |                  |
| ● Temperature Min (Ts min)                                        | 100 °C                  | 150 °C           |
| ● Temperature Max (Ts max)                                        | 150 °C                  | 200 °C           |
| ● Time (Ts min to Ts max)                                         | 60-120 seconds          | 60-120 seconds   |
| Ramp-up rate (TL to Tp)                                           | 3 °C/second max.        | 3 °C/second max. |
| Time maintained above                                             |                         |                  |
| ● Liquidous temperature (TL)                                      | 183 °C                  | 217 °C           |
| ● Time (tL) maintained above TL                                   | 60-150 seconds          | 60-150 seconds   |
| Peak package body temperature (Tp)                                | 235 °C                  | 260 °C           |
| Time within 5 °C of the specified classification temperature (Tp) | 20 seconds              | 30 seconds       |
| Ramp-down rate (Tp to TL)                                         | 6 °C/second max.        | 6 °C/second max. |
| Time 25 °C to peak temperature                                    | 6 minutes max.          | 8 minutes max.   |
| Suggest reflow times                                              | 3 Times max.            |                  |

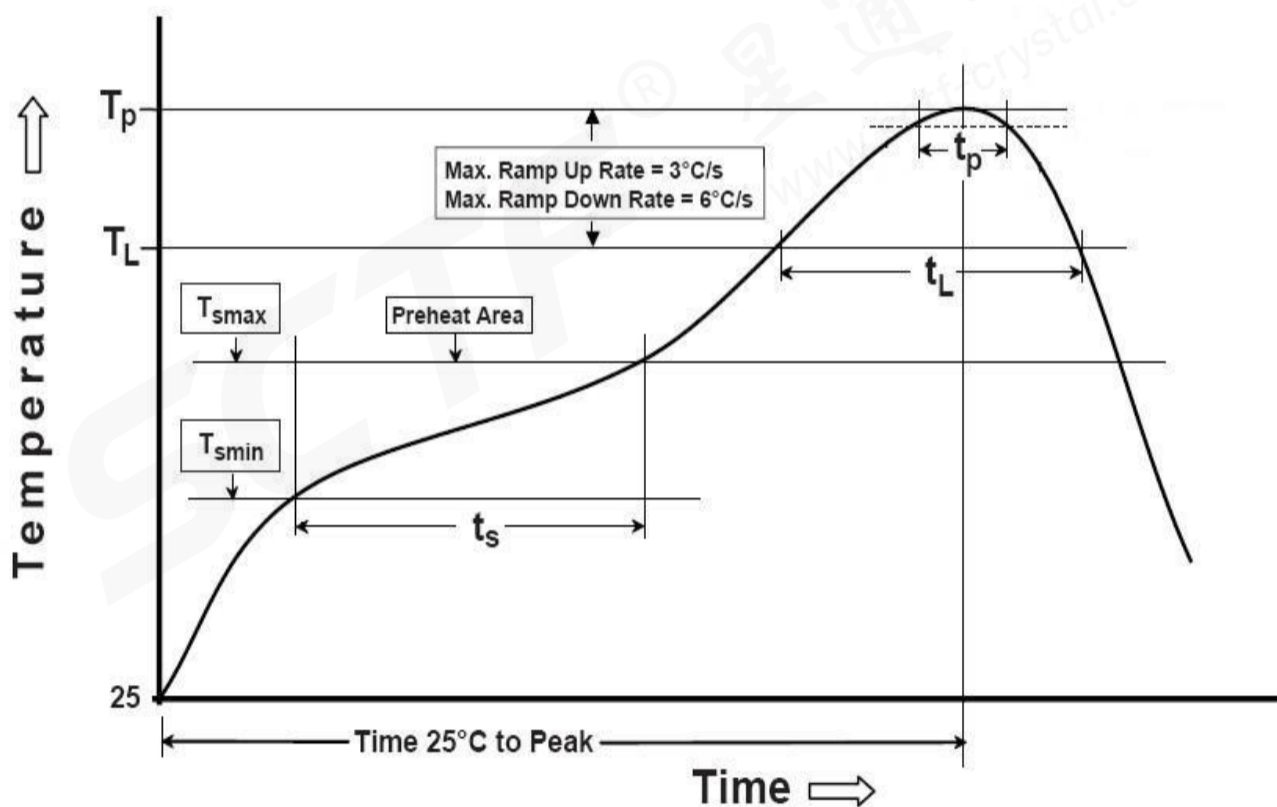

SHENZHEN SCTF ELECTRONICS CO. , LTD

| DATE      | Specification of quartz crystal<br>石英晶体谐振器规格书      | Page: |
|-----------|----------------------------------------------------|-------|
| 2023/5/22 | P/N: SX0B40.000F0810F30<br>Spec.NO.: SCTF202305321 | 6     |

## ■ RELIABILITY SPECIFICATION

| 序号<br>NO. | 项目<br>ITEM                | 条件<br>CONDITIONS                                                                                                                                                                                                                                                                                                                                    | 合格标准<br>BASIS OF VERDICT                                                     |
|-----------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| 1         | 跌落<br>DROP                | 100cm高处自由跌落到3cm厚木板上,3次<br>High: 100cm; Thickness: 3cm; 3 times.                                                                                                                                                                                                                                                                                     | $\Delta FL \leq \pm 5 \text{ ppm}$<br>$\Delta RR \leq RR(\text{max}) * 10\%$ |
| 2         | 振动<br>VIBRATION           | 频率 Frequency: 10~57.7Hz; 幅度 Amplitude: $\pm 0.75 \text{ mm}$<br>频率 Frequency: 57.7Hz~500Hz; 加速度幅度 acceleration rate: $98 \text{ m/s}^2$<br>周期 Cycle time: 10-500-10Hz: 15min<br>振动方向 Direction: X, Y, Z<br>振动时间 Duration: 每个方向2小时 2 h/direction.                                                                                                    | $\Delta FL \leq \pm 5 \text{ ppm}$<br>$\Delta RR \leq RR(\text{max}) * 10\%$ |
| 3         | 温度变化<br>TEMPERATURE SHOCK | $-40^\circ\text{C} \pm 2^\circ\text{C}$ (30min) $\leftrightarrow$ $85^\circ\text{C} \pm 2^\circ\text{C}$ (30min); 循环10次<br>$-40^\circ\text{C} \pm 2^\circ\text{C}$ (30min) $\leftrightarrow$ $85^\circ\text{C} \pm 2^\circ\text{C}$ (30min); For 10 cycles                                                                                          | $\Delta FL \leq \pm 5 \text{ ppm}$<br>$\Delta RR \leq RR(\text{max}) * 10\%$ |
| 4         | 湿热<br>HUMIDITY            | 温度: $40^\circ\text{C} \pm 2^\circ\text{C}$ ; 湿度 90-95%; 时间: 96小时<br>Temp: $40^\circ\text{C} \pm 2^\circ\text{C}$ ; Humidity: 90-95%; Times: 96h                                                                                                                                                                                                     | $\Delta FL \leq \pm 5 \text{ ppm}$<br>$\Delta RR \leq RR(\text{max}) * 10\%$ |
| 5         | 低温<br>COLD RESISTANCE     | 温度: $-40^\circ\text{C} \pm 2^\circ\text{C}$ ; 时间: 96小时<br>Temp: $-40^\circ\text{C} \pm 2^\circ\text{C}$ ; Times: 96h                                                                                                                                                                                                                                | $\Delta FL \leq \pm 5 \text{ ppm}$<br>$\Delta RR \leq RR(\text{max}) * 10\%$ |
| 6         | 高温1<br>HEAT RESISTANCE 1  | 温度: $100^\circ\text{C} \pm 2^\circ\text{C}$ ; 时间: 96小时<br>Temp: $100^\circ\text{C} \pm 2^\circ\text{C}$ ; Times: 96h                                                                                                                                                                                                                                | $\Delta FL \leq \pm 5 \text{ ppm}$<br>$\Delta RR \leq RR(\text{max}) * 10\%$ |
| 7         | 高温2<br>HEAT RESISTANCE 2  | 温度: $155^\circ\text{C} \pm 2^\circ\text{C}$ ; 时间: 2小时<br>Temp: $155^\circ\text{C} \pm 2^\circ\text{C}$ ; Times: 2h                                                                                                                                                                                                                                  | $\Delta FL \leq \pm 5 \text{ ppm}$<br>$\Delta RR \leq RR(\text{max}) * 10\%$ |
| 8         | 高温3<br>HEAT RESISTANCE 3  | 温度: $85^\circ\text{C} \pm 2^\circ\text{C}$ ; 电压: 3.3V/5.0V; 时间: 96小时<br>Temp: $85^\circ\text{C} \pm 2^\circ\text{C}$ ; Voltage: 3.3V/5.0V; Times: 96h                                                                                                                                                                                               | $\Delta FL \leq \pm 5 \text{ ppm}$<br>$\Delta RR \leq RR(\text{max}) * 10\%$ |
| 9         | 回流焊<br>REFLOW             | $150^\circ\text{C} \pm 5^\circ\text{C}$ 保持120s后升到 $270^\circ\text{C} \pm 5^\circ\text{C}$ 保持10s, 升温 and 保温时间小于200s, 常温放置1~2h后测定<br>Keep $150^\circ\text{C} \pm 5^\circ\text{C}$ 120s and then rose to $270^\circ\text{C} \pm 5^\circ\text{C}$ for 10s, warming and holding time is less than the 200s, placed at room temperature 1 ~ 2h after test | $\Delta FL \leq \pm 5 \text{ ppm}$<br>$\Delta RR \leq RR(\text{max}) * 10\%$ |
| 10        | 盐雾<br>SALT SPRAY          | 盐雾浓度: 5%; 温度: $35^\circ\text{C}$ ; 时间: 24小时<br>Salt density: 5%; Temp: $35^\circ\text{C}$ ; Times: 24h                                                                                                                                                                                                                                              | 目测无明显腐蚀现象<br>Visual no significant corrosion.                                |
| 11        | 老化<br>AGING               | 温度: $85^\circ\text{C}$ ; 时间: 30天<br>Temp: $85^\circ\text{C}$ ; Times: 30days                                                                                                                                                                                                                                                                        | $\Delta FL \leq \pm 5 \text{ ppm}$<br>$\Delta RR \leq RR(\text{max}) * 10\%$ |
| 12        | 气密性<br>LEAKAGE            | 氦气(0.6~0.65MPa): 10分钟<br>He(0.6~0.65MPa): 10min                                                                                                                                                                                                                                                                                                     | $\leq 3 * 10^{-9} \text{ Pa} \cdot \text{m}^3/\text{s}$                      |
| 13        | 焊接<br>SOLDER              | 温度: $235^\circ\text{C} \pm 5^\circ\text{C}$<br>Temp: $235^\circ\text{C} \pm 5^\circ\text{C}$                                                                                                                                                                                                                                                        | 浸锡率大于90%<br>Soldering tin rate greater than 90%                              |


### SHENZHEN SCTF ELECTRONICS CO. , LTD

| DATE      | Specification of quartz crystal<br>石英晶体谐振器规格书      | Page: |
|-----------|----------------------------------------------------|-------|
| 2023/5/22 | P/N: SX0B40.000F0810F30<br>Spec.NO.: SCTF202305321 | 7     |

## PACKAGE


### ◆ Taping Specifications 编带规格

UNIT (单位): mm (毫米)

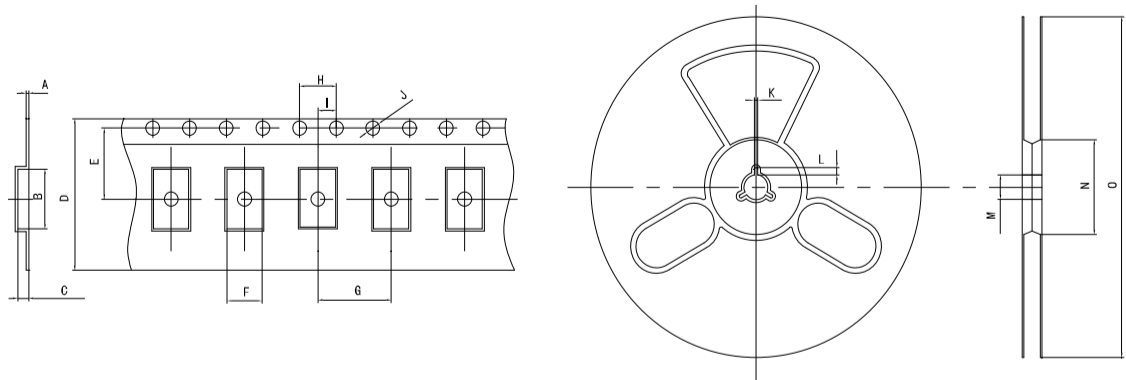

| TEYE        | A    | B    | C    | D    | E    | F    | G    | H    | I    | J    | K    | L    | M     | N     | O      |
|-------------|------|------|------|------|------|------|------|------|------|------|------|------|-------|-------|--------|
| 1.6×1.2 SMD | 0.25 | 1.85 | 0.45 | 8.00 | 3.50 | 1.45 | 4.00 | 4.00 | 2.00 | 1.55 | 2.00 | 4.00 | 13.00 | 60.00 | 180.00 |

### ◆ Packaging specifications 包装规格

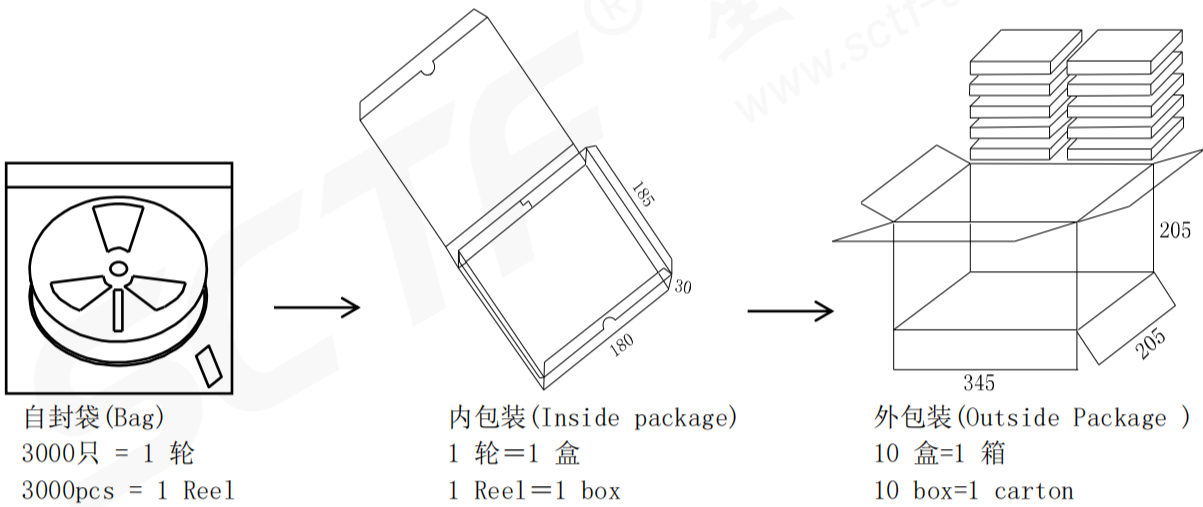

| SHENZHEN SCTF ELECTRONICS CO. , LTD |                                                    |       |
|-------------------------------------|----------------------------------------------------|-------|
| DATE                                | Specification of quartz crystal<br>石英晶体谐振器规格书      | Page: |
| 2023/5/22                           | P/N: SX0B40.000F0810F30<br>Spec.NO.: SCTF202305321 | 8     |