


PIN NO.	DIMENSION	
	A	B
2*2	2.54	5.58
2*3	5.08	8.12
2*4	7.62	10.66
2*5	10.16	13.2
2*6	12.7	15.74
2*7	15.24	18.28
2*8	17.78	20.82
...
2*40	99.06	102.1

SPECIFICATION

Current Rating : 3A
 Insulator Resistance : 1000 MΩ min
 Contact Resistance : 20 mΩ Max
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40 °C to +105 °C
 Contact Material : G5191
 Insulator Material : Polyester, UL 94V-0
 Standard : Ni6T+30%G. F
 Contact Plated : Gold Flash All Over Nickel

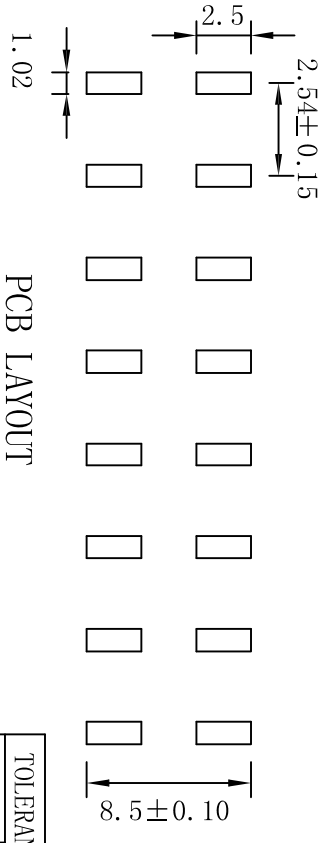

PCB LAYOUT

TOLERANCE TABLE

.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	TITLE: 深圳市灿科盟实业有限公司 Ckmtw CHANKEMENG INDUSTRYCO., LTD			
CHECKED:	DATE:	220SMT-2*xP H=5.0MM W=7.4MM U型端子			
DRAWN:	DATE:	CLIENT P/N	SCALE	free	REV.
L.Y.F	2008-04-29	/	mm	102.1	A
		UNIT	SCALE	free	REV.
		FILE NO.	Ckmtw-220-00026	REV.	A