

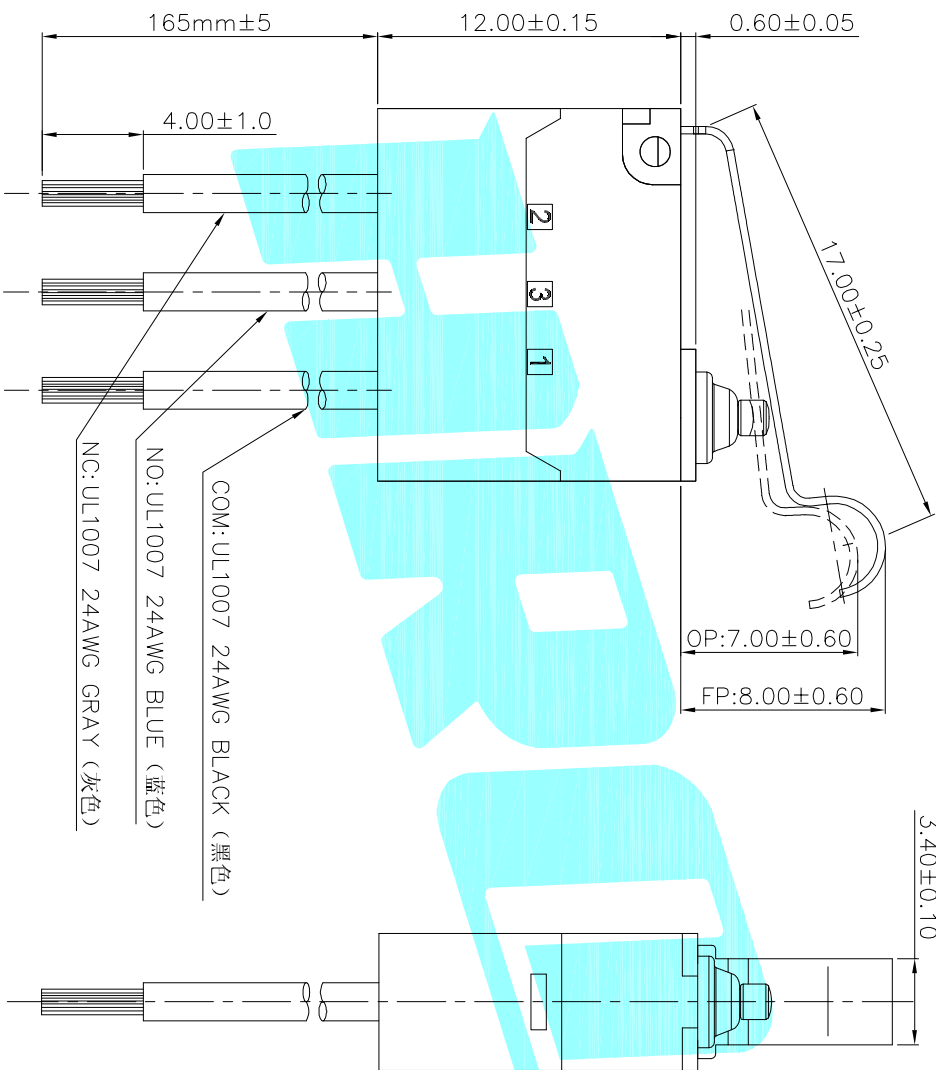


INGRESS PROTECTION:IP67

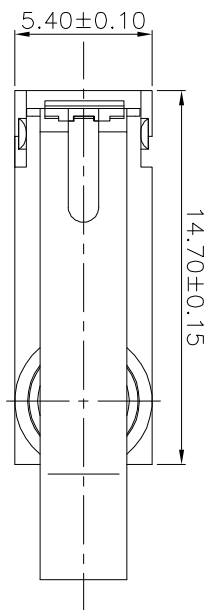

- NOTE:
- 1.Rating1:DC12V 3A
Rating2:48V DC/125V AC/250V AC 0.1A
 - 2.Operating froce:130gf MAX
 - 3.Electric Life:10,000
 - 4.Mechanical Life:1,000,000

COM:UL1007 24AWG BLACK (黑色)
 NO:UL1007 24AWG BLUE (蓝色)
 NC:UL1007 24AWG GRAY (灰色)

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
①	Cover	—	1	PA	Black	
②	Cose	—	1	PA	Black	
③	Plunger	—	1	POM	Black	
④	Terminal	—	3	Brass(0.50t)	Plating silver	
⑤	Sealed Circle	—	1	Silicone Rubber		
⑥	Contact	—	1	Ag		
⑦	Shrapnel	—	1	Brass	Plating silver	

APPROVALS	DATE	TITLE
J.X.Zhang	2018/8/1	MICRO SWITCHS

DRAWN	J.X.Zhang	2018/8/1	ELECTRONICS CO.,LTD
CHECKED			
APPROVALS			

APPROVALS	PART NO.	K9-1803A-6
TOLERANCES ARE	SCALE:	1:1
30~R/L ±0.30	UNIT:	mm
10~30 ±0.20	DRAWING NO.	
5~10 ±0.15	SHEET	1 OF 1
~5 ±0.10	ANGLE	±2°

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			