



P.C.B LAYOUT

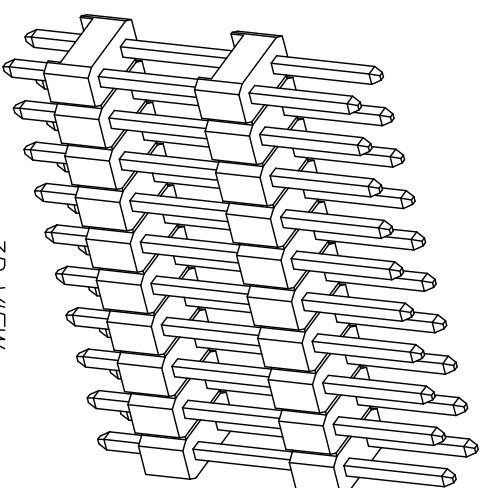


3D VIEW

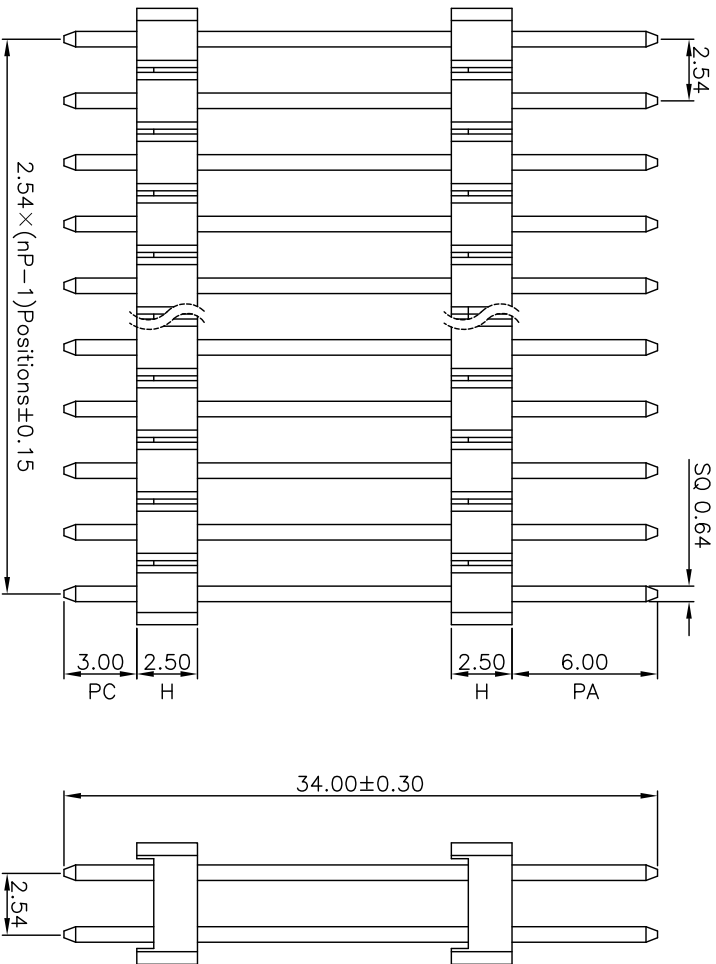

SPECIFICATIONS

Rated Current : 3.0AMP
 Contact Resistance : 20mΩ Max
 Withstand Voltage : 500V AC/DC
 Insulation Resistance : 1000MΩ Min
 Operation Temperature : -40°C to +108°C

Contact Material : Brass
 Contact Plating : Au or Sn Over Ni
 Insulator Material : Polyester(UL94V-0)
 Standard : PA6T
 Max Processing Temp : 230°C for 5-10 seconds

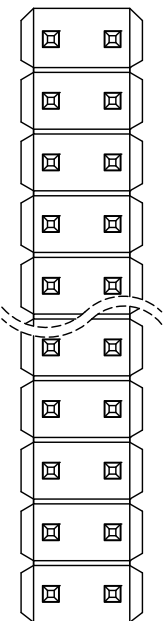

MODEL: 2.54-2xN _P Lx-H2.5-PAxxPCx	DRAWN BY : Leiqin	DATE:	GENERAL TOLERANCE: (UNLESS SPECIFIED)
TITLE : 双层双排塑高2.5直插排针	CHECKED BY : Liwei	DATE:	X. ±0.30mm X. ±
DRAWING NO:	REV. : A	DATE:	X.X ±0.25mm X.X ±
SHEET: 1 OF 1	SCALE: 3:1	DATE:	X.XX ±0.20mm X.XX ±
	SIZE: A4	DATE:	X.XXX±0.10mm X.XXX ±
	UNIT : mm	DATE:	

MEASURE POINT:

QUADRANT POINT
 TANGENCY POINT
 INTERSECTION POINT



深圳市吉威电子有限公司
 SZJUSTWELL ELECTRONICS CO., LTD

NO:	PARTICULAR	BY	DATE
REVISIONS			