



# KBJ8005 THRU KBJ810

## SINGLE PHASE 8.0 AMP BRIDGE RECTIFIERS



### FEATURES


- \* Ideal for printed circuit board
- \* Low forward voltage
- \* Low leakage current
- \* Mounting position: Any

### VOLTAGE RANGE

50 to 1000 Volts

### CURRENT

4.0 Amperes

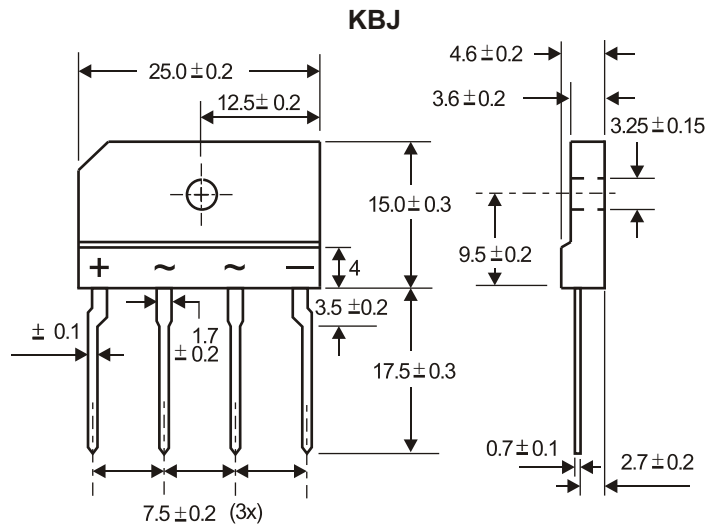

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
 Single phase half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

TYPE NUMBER	KBJ8005	KBJ801	KBJ802	KBJ804	KBJ806	KBJ808	KBJ810	UNITS	
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
Maximum Average Forward (with heatsink Note 1)								8.0	A
Rectified Current at Tc=110°C (Without heatsink)								2.9	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)								170	A
Maximum Forward Voltage Drop per Bridge Element at 4.0A D.C.								1.0	V
Maximum DC Reverse Current Ta=25°C								5.0	µA
at Rated DC Blocking Voltage Ta=100°C								500	µA
Typical Thermal Resistance R <sub>jc</sub> (Note 2)								2.8	°C/W
Typical Thermal Resistance R <sub>jl</sub> (Note 3)								5.5	°C/W
Operating Temperature Range, T <sub>J</sub>								-55 — +150	°C
Storage Temperature Range, T <sub>STG</sub>								-55 — +150	°C

#### NOTES

1. Device mounted on 100mm x 100mm x 1.6mm Cu Plate Heatsink.
2. Thermal Resistance from Junction to Case with device mounted on 100mm x 100mm x 1.6mm Cu Plate Heatsink.
3. Thermal Resistance from Junction to Lead without Heatsink.

## RATING AND CHARACTERISTIC CURVES (KBJ8005 THRU KBJ810)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

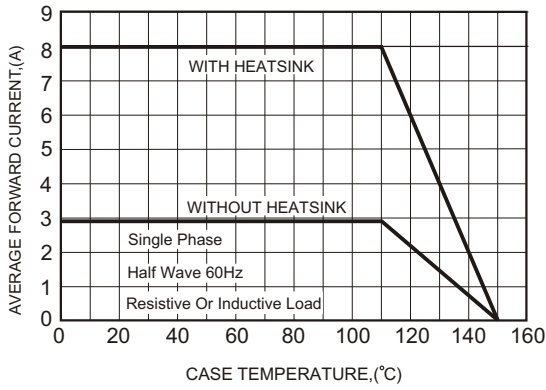


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

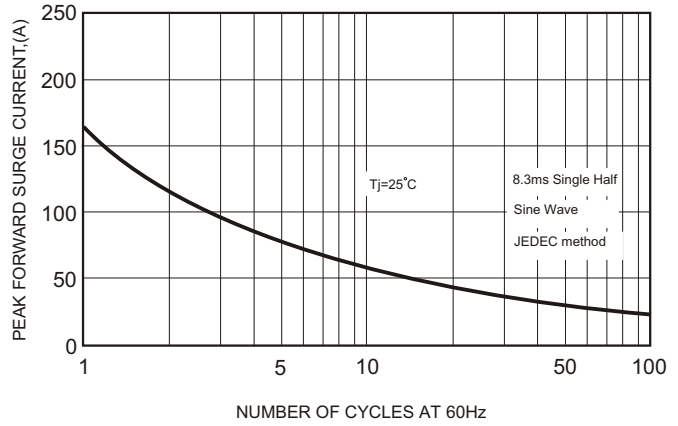


FIG.3-TYPICAL FORWARD CHARACTERISTICS

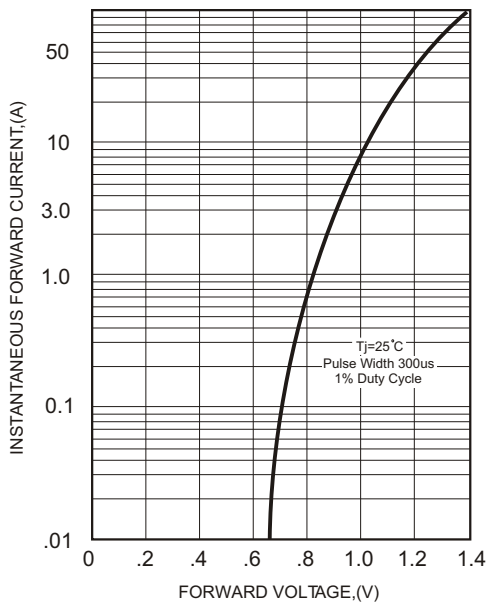


FIG.4-TYPICAL REVERSE CHARACTERISTICS

