
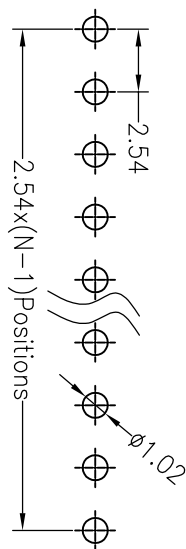


RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Or Sn Over Ni
 Insulator Material:Polyester(Ul94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)


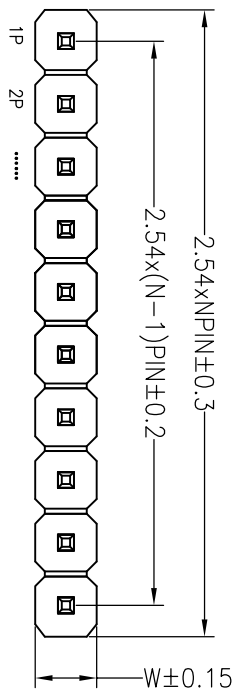


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

P X X X X XX X X XX X XXXX

产品型号 规格 长度 插拔 单排/双排 产品形态 绝缘材料 电镀厚度 包装方式 序列号
 P=材料 1=1.27 A=1.0 1=单排 1=DIP 1=FR1 00=常规 1=管装
 2=2.54 B=1.5 2=双排 2=HT 01=UV* 2=卷装
 3=3.96 C=2.0 3=三排 3=SMT 02=20* 3=盘装
 4=3.96 D=2.5 4=四排 4=PA6 03=30* 4=盘装
 5=1.0 5=机械脚 5=PA6T 9=PA91 5=盘装
 A=1.27*2.54

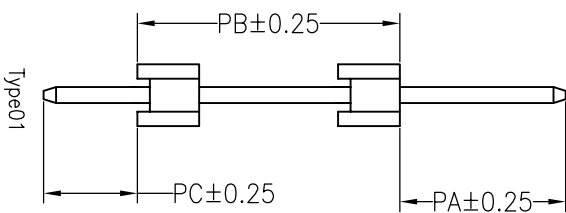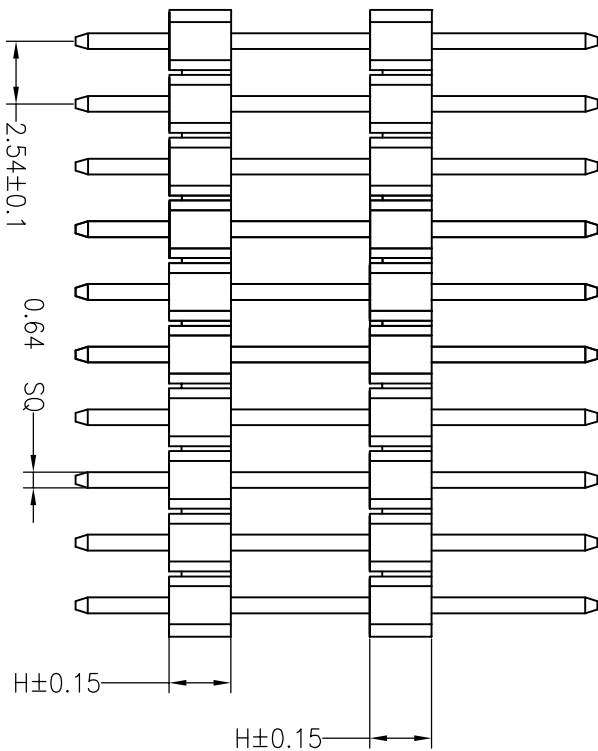

Dimension antitheses list										
ITEM	PA	PB	PC	L1	L2	L3	H	W		
001	6.00	20.0	3.00	29.0			2.5	2.5		
Alternate										

深圳市连盛精密连接器有限公司

OPERATION		DRAW		SCALE		FIT	
X.X	±0.30			UNIT	mm		
X.XX	±0.20	CHECK		SIZE	A4		
X.XXX	±0.10			SHEET	1/1		
Angle	±5°	APPROVE		PROJ.			
DIM	TOL						

PART NO.	P3D105150042182
TITLE:	2.54PH 2H=2X2.5 1*5P DIP PA6.0 PB20.0 FC3.0 L=29.0 AU0.8U PA6T