


■ Features

- High rated current for circuit design.
- Design by special lead wire to prevent open circuit failure.
- Low cost with rugged reliability and performance fixed inductor.
- Operating temperature: -40°C ~ +125°C.

■ Applications

- TVs and Audio equipment.
- Notebook, Inkjet printer, Copying machine, Display monitor, Cellular phone.
- Switching Power Supply.
- Excellent as DC/DC converter boost or buck inductor.

■ Product Identification




(1) : Type

(2) : Dimensions

(3) : Inductance value

(4) : Inductance Tolerance : N=±30%, M=±20% , K=±10% , J=±5%

■ Shapes and Dimensions (Unit: mm)

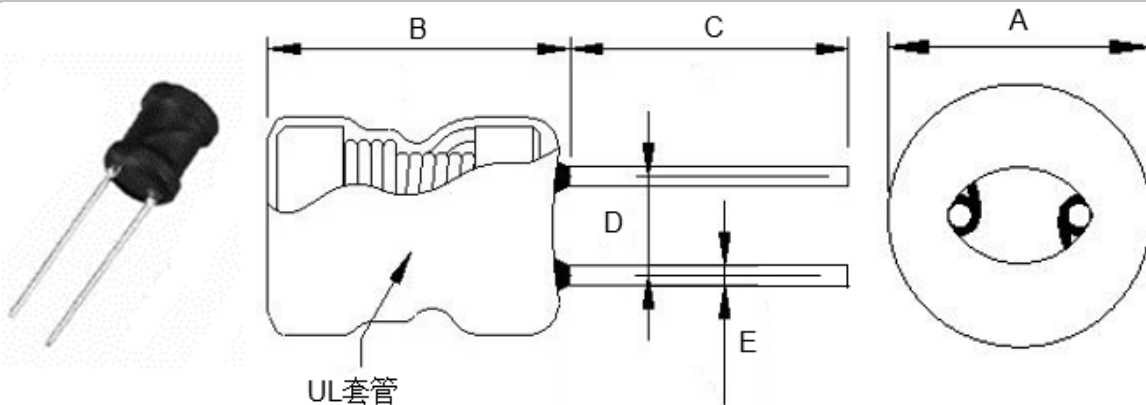

TYPE	A Max.	B Max.	C	D	E
YPK0608	8.0	12.0	18.0±2.0	3.0±0.5	0.60±0.10

■ Electrical Specification

Part Number	Inductance (uH)	Test Condition	DCR (Ω) Max.	I sat (mA) Max.
YPK0608-222K	2200 \pm 10%	1KHz/0.25V	8.0	130

※ Design as Customer's Requested Specifications.


■ Material List

No	Item	Description	Supplier	Rating	UL File
1	Core	J2B DR2W 6x8.3	JIACI		
		OR EQUIVALENT			
2	Wire	QA-1 ϕ 0.13mm 本色	JINYAN	155 $^{\circ}$ C	E238500
		OR EQUIVALENT			
3	TUBE	T-2 ϕ 6*10.5mmUL (Black)	QUNAITAI	125 $^{\circ}$ C	E227336
		OR EQUIVALENT			
4	PIN	CP ϕ 0.6mm	BAICHUAN		



■ Reliability test

NO.	Items	Test Methods	Requirements
1	Lead terminal strength	A static pulling force of 5N in a direction parallel to the lead terminals for 60±5 seconds.	No terminal breakage or loosening.
2	Resistance to soldering heat test	Fix the samples on a 1.6mm thickness PCB, then dip the sample leads into a soldering bath of 270±5°C up to the PCB for 5±1 seconds.	No significant abnormality in appearance. Deviation relative to initial value: L: Within ±10%
3	Solder ability test	Immerse the terminal in flux for 5 seconds. Then dip the terminal into a soldering bath of 245±5°C for 2±0.5 seconds.	At least 90% of terminal electrode is covered by new solder.
4	Humidity test	Temperature: 40°C±2°C Humidity: 90%~95%RH Duration: 96±4 Hours	No significant abnormality in appearance. Deviation relative to initial value: L: Within ±10%
5	High temperature storage test	Temperature: 85°C±2°C Duration: 96±4 Hours	No significant abnormality in appearance. Deviation relative to initial value: L: Within ±10%
6	Low temperature storage test	Temperature: -25°C±2°C Time: 96±4 Hours	No significant abnormality in appearance. Deviation relative to initial value: L: Within ±10%
7	Thermal shock test	First -25±5°C for 30±3 minutes, last 85±5°C 30±3 minutes as 1 cycle. Go through 10 cycles.	No significant abnormality in appearance. Deviation relative to initial value: L: Within ±10%

■ Package specification

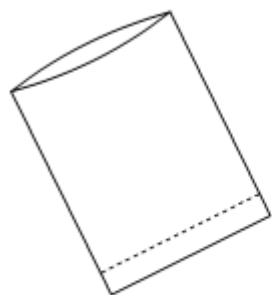

PE 袋

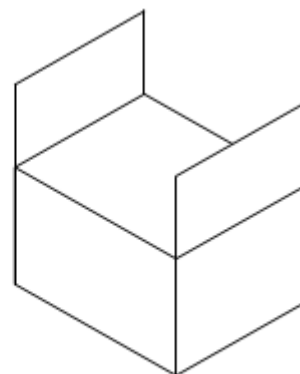

Type	Quantity(pcs)			Remark
	Bag	Inside box	Outer box	
YPK0608	500	5000	20000	