


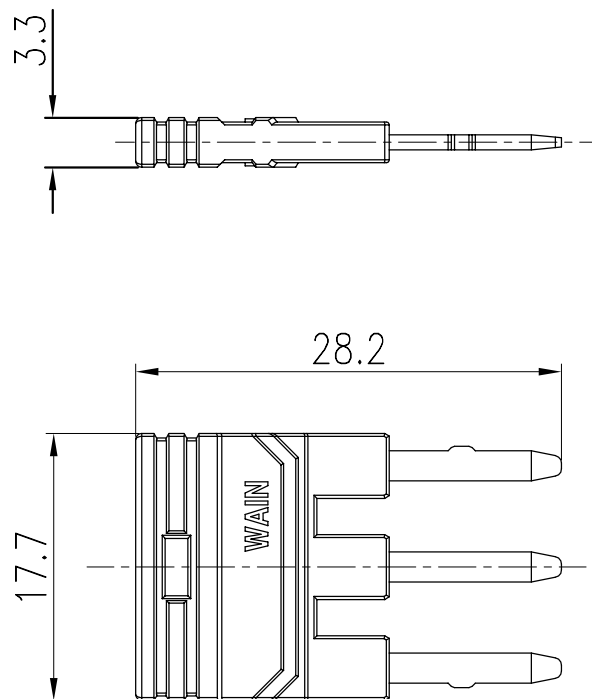

- Horizontal 3Pin short circuit
- Rated current: 16A
- Rated voltage: 500V
- Rated impulse voltage: 6kV
- Pollution degree: 3
- Rated voltage acc.to UL/CSA: 600V
- Insulation resistance: $\geq 10^{10}\Omega$
- Contact resistance: $\leq 3m\Omega$
- Material: polycarbonate+copper alloy
- Colour: RAL 5012(Blue)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 50
- Surface: tinn plated

						表面处理 Finish		—		图号 Drawing No.	—
						材料 Material		—		产品代号 Part Code	HEB/P-1T3
标记 Mark	处数 Number	变更描述/Description			签名 Signature					日期 Date	产品料号 Part No.
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
绘图 Drawn	XL SU	10.09.2021	标准化 Stand.	—	—	1:1	V1.0	—	—		
审核 Checked	HZ LAN	10.09.2021									
工艺 Process	—	—	批准 Approved	HQ ZHANG	10.09.2021	 		All Dimensions in mm Original Size DIN A 4		 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	