





# RoHS

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

## SPECIFICATIONS

Rated Current:3.0AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:1000V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:−40°c to +105°c

Contact Material:Brass  
Contact Plating:Au Or Sn Over Ni  
Insulator Material:Polyester(Ul94V-0)  
Standard: PA6T  
Max.Processing Temp: 230°C for 30–60 seconds  
(260°C for 10 seconds)

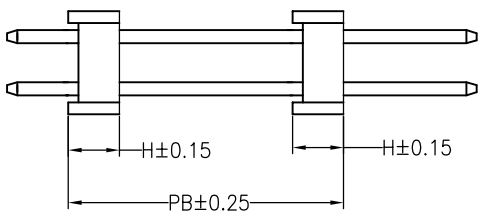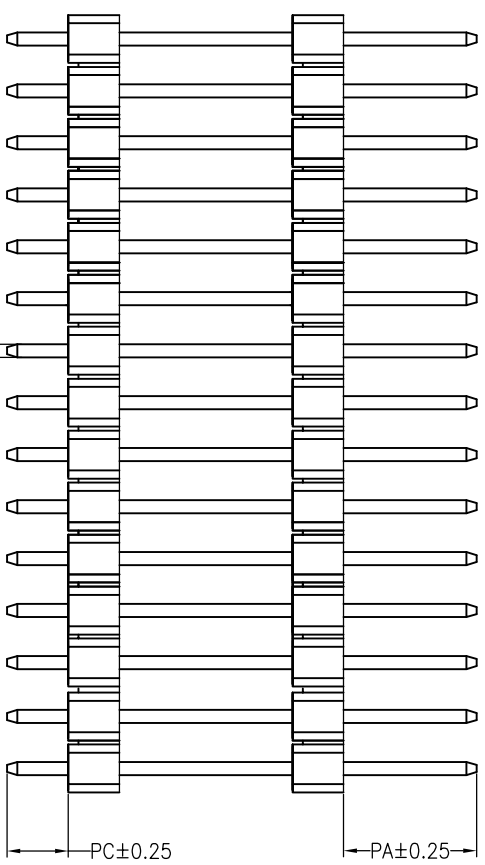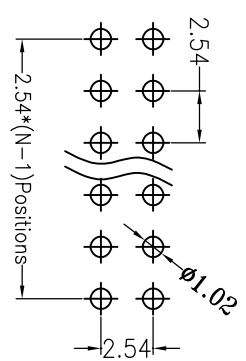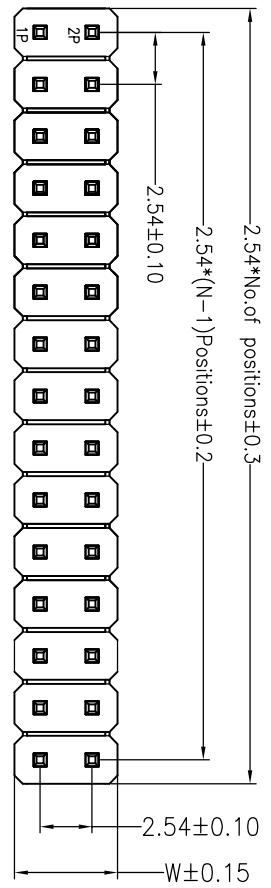

## Ordering Information

P X X X X XX X X XX X XXXX

产品类型 间距 塑胶高度 排数 单排Pin数 产品形态 塑胶材料 电镀厚度 包装方式  
 P=排数 1=1.27 A=1.0 1=单排 1~40P 1=DIP 1=FBT 00=常规 1=管装  
 2=2.0 B=1.5 2=双排 2=LCP 2=LCP 01=1u" 2=卷装  
 3=2.54 C=2.0 3=三排 3=SMT 3=SMT 02=2u" 3=盘装  
 4=3.96 D=2.5 4=四排 4=SH 4=PA46 4=PA46 03=3u" 4=袋装  
 5=1.0 5=1.0 5=焊线脚 5=PA6T 5=PA6T 09=9u" 5=盒装  
 A=1.27\*2.54

Dimension notches list									
ITEM	PA	PB	PC	L1	L2	L3	H	W	
001	6.00	20.0	3.00	29.0			2.5	5.0	
Alternate									

深圳市连盛精密连接器有限公司

OPERATION		DRAW		SCALE		FIT		PART NO.		TITLE:	
X.X	±0.30			UNIT	FIT	UNIT	FIT	UNIT	FIT	SIZE	SHEET
X.XX	±0.20	CHECK		mm	A4	1/1		P3D208150041713		2.54PH 2H=2X2.5 2*8P DIP PA6.0 PB20.0	
X.XXX	±0.10									PC3.0 L=29.0 AU0.8U PA6T	
Angle	±5°	APPROVE		PROJ.							
DIM	TOL										

REV A0 2012.03.28 NEW DRAWING DATE MODIFICATION DESCRIPTION CHANGE DIM

1 2 3 4 5 6 7 8 9