

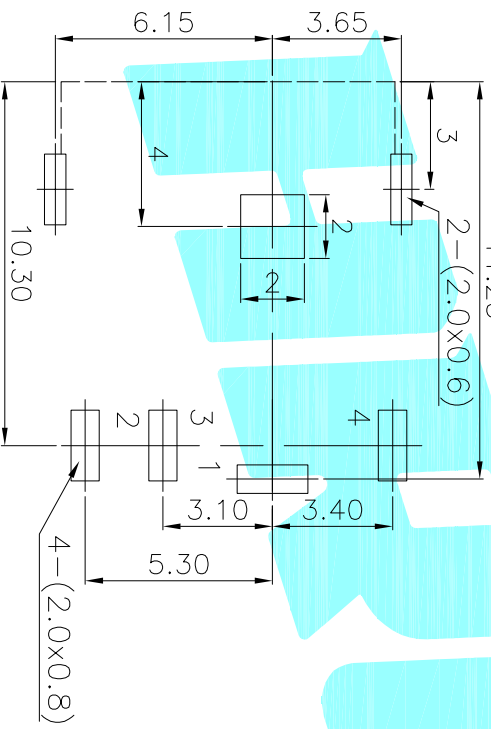


P.C.B LAYOUT(copper-sided view)
11.25

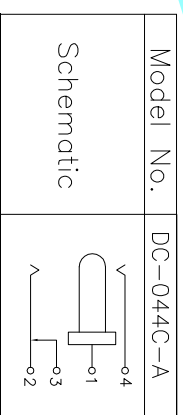

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature: -20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

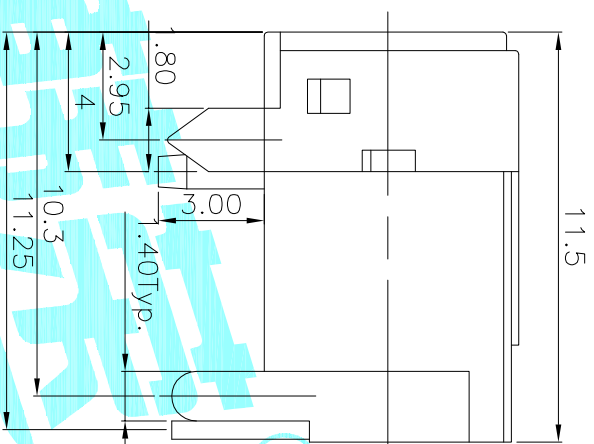

Model No.	1	2	3
PIN	$\phi 1.65$	$\phi 2.0$	$\phi 2.5$

② Terminal	4	Phosphor bronze/ Au Plating
① Housing	1	Nylon Black
ITEM PART NAME	TERNO. QTY.	MATERIAL FINISHING
APPROVALS	DATE	REMARK
DRAWN J.X.Zhang	2013/11/11	
CHECKED	TITLE: PHONE JACKES	
APPROVALS	PART NO. DC-044C	
TOLERANCES ARE	30~0.15 ±0.30	ANGLE
	10~0.20 ±0.20	UNIT: mm
	5~0.10 ±0.15	SCALE: 1:1
	~5 ±0.10	DRAWING NO.
		PROJ:
		SHEET 1 OF 1



ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			