
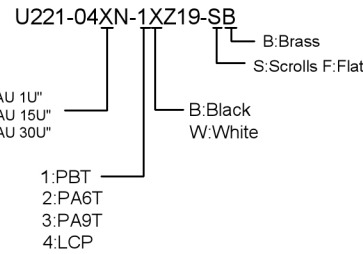


P.C.B LAYOUT  
BOTTOM VIEW

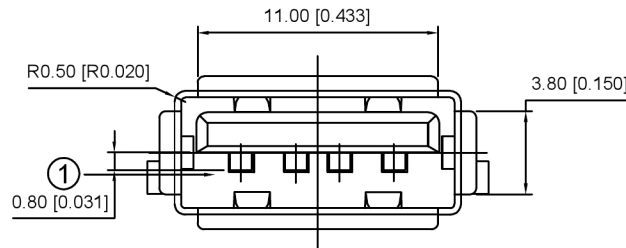

**SPECIFICATIONS:**

Contact current Rating: 1Amperes.  
 DIELECTRIC Withstanding Voltage: AC 500V.  
 Insulation resistance: 1000MΩ Minimum.  
 Contact Resistance: 30mΩ Maximum.  
 operating Temperature: -55℃ to +85℃.

**MECHANICAL CHARACTERISTICS:**

Mating Force: 3.5Kg. Maximum.  
 Unmating Force: 1kg. Minimum.  
 durability: 1500 cycles.

Major DIM: △

3	SHELL	C2680	T=0.30	Cu 50U"@Ni 50U"	1
2	TERMINAL	C5191	T=0.25	Sn 100U"+ Au 1u"-30U"	4
1	HOUSING	PBT	—	WHITE/BLACK UL94-V0	1
NO.	PART NAME	MATERIAL	THICK	FINISH	QTY

广东星坤科技股份有限公司  
 文件工程章

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5
UNSPECIFIED TOLERANCES	



DSND	SCALE: N/A	MODEL TYPE: USB 2.0
DWN	VIEW:	PART NO.:
CHKD	UNIT: mm/in	DWG NO.: U221-04XN-1XZ19-SB
APPD	SIZE: A4	WEIGHT
XKB INDUSTRIAL PRECISION CO., LIMITED		SHEET 1/1
		REVISION A0