
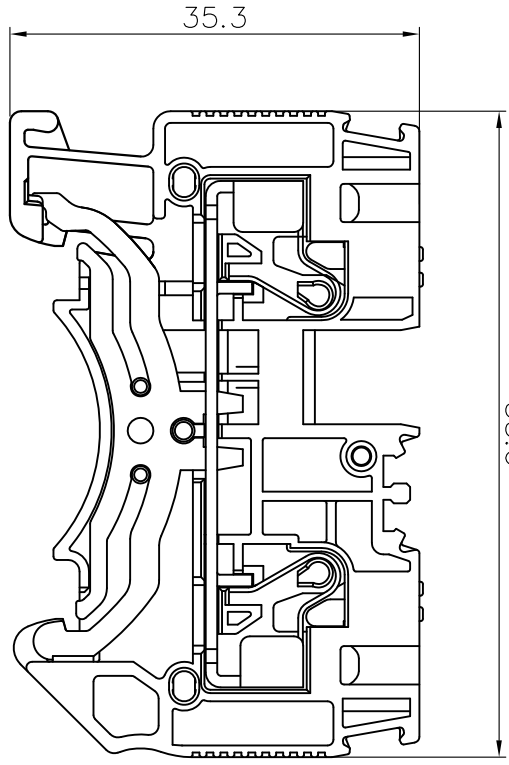



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

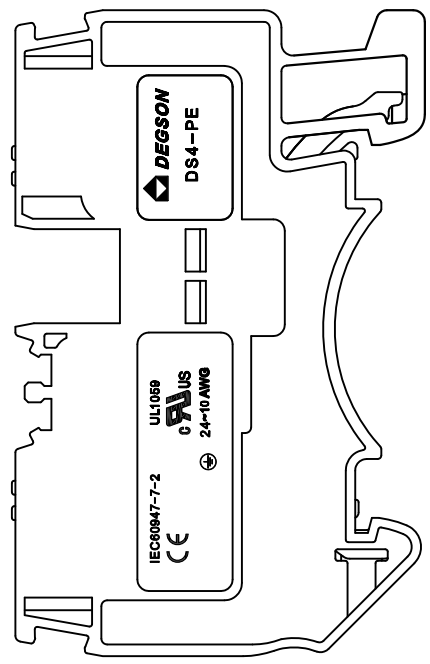

NOTES1:
 UL Standard
 1. Wire Range : 24~10AWG
 IEC Standard

1. Pollution Degree	3
Overvoltage Category	III
Rated Impulse Voltage(KV)	8.0KV
Rated Voltage(V)	/
Rated Current(A)	/


2. Wire Range : 0.2~4mm², sol: 6mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 6.2mm
3. Stripping length : 10-12mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned Tolerances:

Pitch Range	In	mm	Nominal Dimension	Range	mm
Over	10	Over	30	Over	100
To	6	To	50	To	150
10	10	24	70	100	150
10	10	30	80	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±1.00
					±1.30
					±2°

6. RoHS Compliance

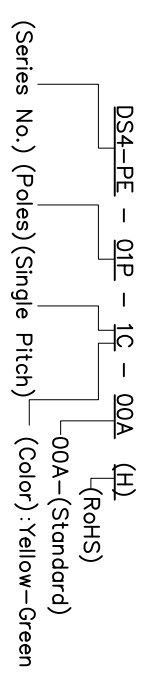

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	

DEGSON 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD
 NAME: DS4-PE-01P-1C-00A(H)

TITLE: CUSTOMER DRAWING	REV	DO
DRAWING NO.:	/	SHEET
SCALE	DO NOT SCALE DRAWING	1/1

A 8 7 6 5 4 3 2 1