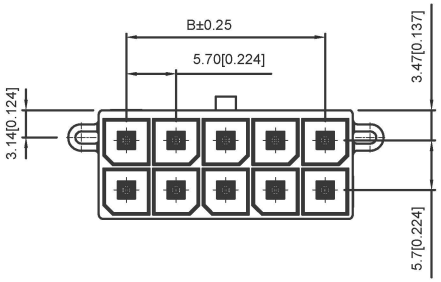



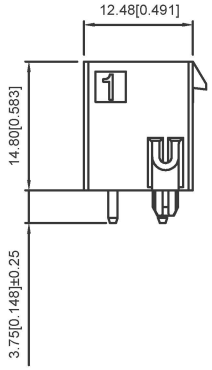

Specifications :

Voltage rating: 600V AC / DC
Current rating: 23A AC / DC
Withstanding voltage: 2200V AC/minute
Temperature range: -40°C~+105°C
Insulation resistance: ≥1000M Ω
Contact resistance: ≤2mΩ
After environmental testing : ≤10mΩ
Plug the Pin & Special No.: H-High conductive Brass

X5700 W V -2xXX -LP SW
① ② ③ ④ ⑤ ⑥

① Series No.
② Category : W-WAFER
③ Welding Board Angle : V-Straight 180°
④ Row No.-Pin No.: 2xXX-2x02P~2x06P
⑤ Material: LP -LCP 94V-0
⑥ Plating Category: SW-Matte Tin Plating

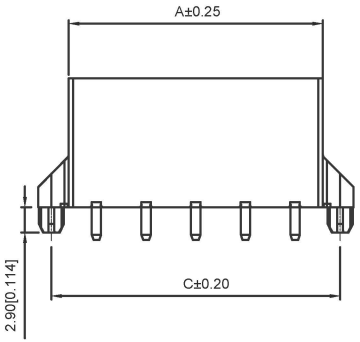

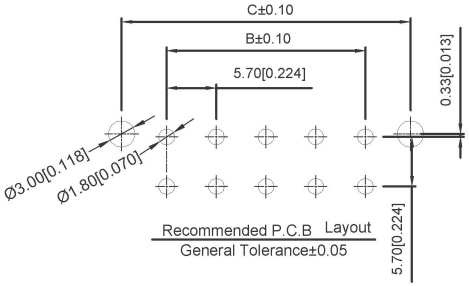

Poles	Dimensions (mm)		
	AB		C
2x01	8.35		12.34
2x02	12.05	5.70	16.04
2x03	17.75	11.40	21.74
2x04	23.45	17.10	27.44
2x05	29.15	22.80	33.14
2x06	34.85	28.50	38.84

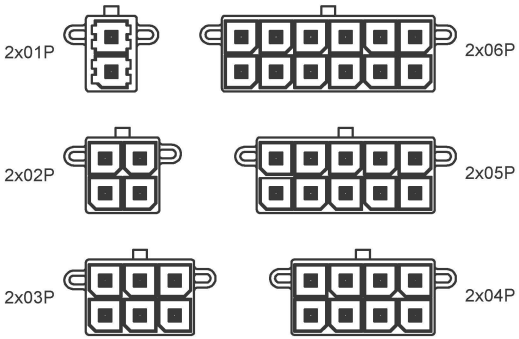



X5700WV-2xXX-LPSW	High conductive Brass	X5700H	X5700T
PART N0	Material	Suitable XKB Terminal	Suitable XKB Terminal

广东星坤科技股份有限公司

生效		日期
ΔX		
ΔX		
ΔX		

MARK	DESCRIPTION	DATE	REVISED	APPROVED

REVISIONS

文件工程章

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

units:	mm
tolerance:	
X.X	±0.2mm
X.XX	±0.1mm
X.XXX	±0.05mm

UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A	MODEL TYPE: Wire to board connector
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	
APPD		DATE		SIZE: A4	DWG NO.: X5700WV-2xXX-LPSW

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0