


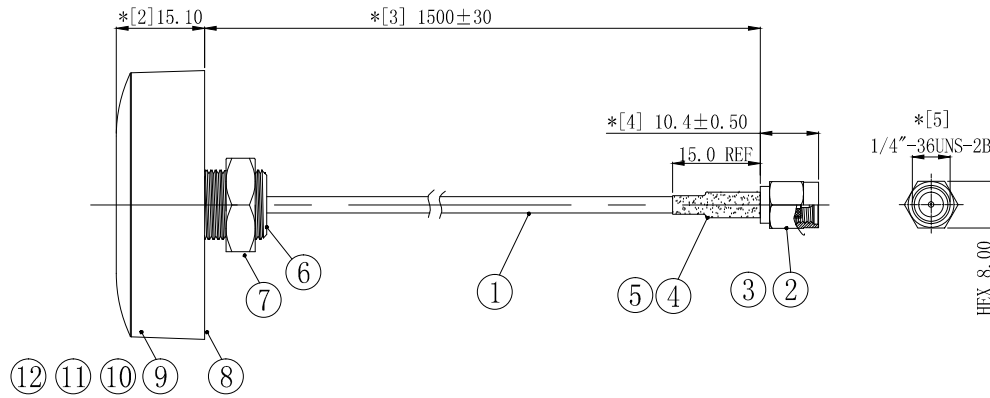


1	2	3	4	5	6	7	8
REVISION		DESCRIPTION		DATE	DRAFTER		
A0		FIRST RELEASE		19.11.21	Mark		

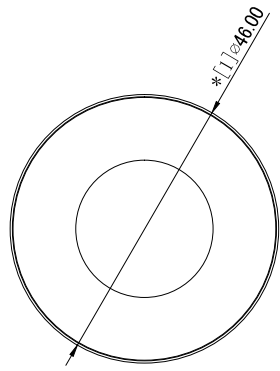

3D 视图

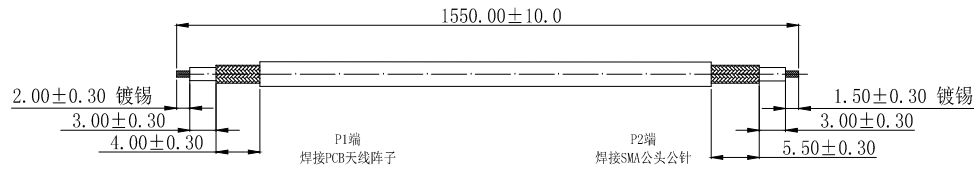

13	2MH030	L10*W15mm*T9.0, EVA+双面背胶	3	---
12	2YG085	铜管, OD4.0 L10.0内孔3.2mm	1	---
11	2YP085	wifi 下层PCB, 带3M L300背胶, FR-4	1	---
10	2YP084	wifi 上层PCB, FR-4, OD41.2*T0.6mm	1	---
9	2SBKG3801-1	小平头蘑菇塑胶体, 黑色抗紫外线OD:46.0*H:15.1mm	1	---
8	2SBKG3801-2	塑胶盖, 黑色抗紫外线OD:46.0mm	1	---
7	2LC00S-313	M12螺母, H:16.0*T:5.0mm	1	---
6	2LC00S-314	M12螺柱, OD:15*L:13.0mm	1	---
5	2TA035BK1-015	OD:3.5*L15.0mm, 无卤阻燃, 125H2普通型, 黑色	1	---
4	2LC15S-601	铜管, 镀镍OD:3.9*L9.0	1	---
3	2LC15PM623-5	SMA公针OD:1.5*L8.3mm 镀金	1	---
2	2LC15PM623-2	SMA公头 H8.0*L16.5镀金	1	---
1	2C5R17414BK1	RG174 coaxial-cable, BLACK	1	---
No.	PART NUMBER	PART NAME & DESCRIPTION	Q'TY	REMARKS

Technical requirements:

- 1 electrical characteristics: impedance: 50 Ω ;
Applicable frequency range: 2.4GHz ~ 2.5GHz VSWR < 2.0;
2. Dimension inspection: [*] is the FAI test item; * As a key test item; ■ Controlled items for CPK.
3. Packaging specification: IPCS/ Bag
4. Environmental requirements: products and materials used must meet RoHS requirements.

COMPLIANCE WITH THE REQUIREMENT: ■ RoHS; □ HF; □ SONY SS-00259; □ OTHERS
*NO USING ESTRICTED AND BANNED SUBSTANCE

GENERAL TOLERANCE:	
LINEAR:	
X	± 2.00
X.X	± 1.00
X.XX	± 0.50
X.XXX	± 0.30
ANGLE:	
X°	$\pm 4.00^\circ$
X.X°	$\pm 3.00^\circ$
X.XX°	$\pm 2.00^\circ$
X.XXX°	$\pm 1.00^\circ$

HJ-Tech 东莞市皇捷通讯科技有限公司

FILE NAME: product drawing TITLE: wifi小平头蘑菇天线, RG174 线L1.5M
ENG/DATE: Mark/20.07.08

CHE/DATE: P/N: HJ-wifi-RG174

APP/DATE: UNIT: mm SCALE: 1:1 REVISION: A0 SHEET: 1/1