

RoHS  
COMPLIANT

**Surface Mount Schottky Barrier Rectifier**  
**Reverse Voltage - 20 to 200 V**  
**Forward Current - 1.0 A**

**FEATURES**


- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

**MECHANICAL DATA**

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00048oz

**PINNING**

PIN	DESCRIPTION
1	Cathode
2	Anode

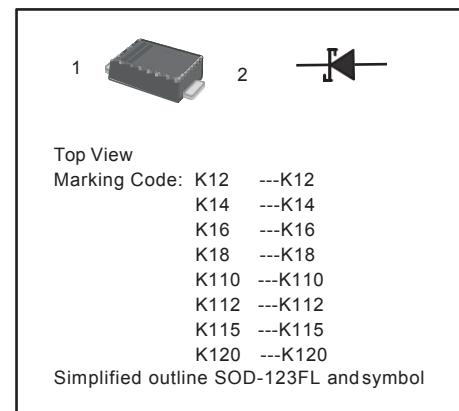**Absolute Maximum Ratings and Electrical characteristics**

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

Parameter	Symbols	K12	K14	K16	K18	K110	K112	K115	K120	Units				
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	20	40	60	80	100	120	150	200	V				
Maximum RMS voltage	V <sub>RMS</sub>	14	28	42	56	70	84	105	140	V				
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	40	60	80	100	120	150	200	V				
Maximum Average Forward Rectified Current	I <sub>F(AV)</sub>	1.0							A					
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I <sub>FSM</sub>	30							A					
Max Instantaneous Forward Voltage at 1 A	V <sub>F</sub>	0.55		0.70		0.85		0.90		V				
Maximum DC Reverse Current T <sub>a</sub> = 25°C at Rated DC Reverse Voltage T <sub>a</sub> = 100°C	I <sub>R</sub>	0.3 10			0.2 5		0.1 2		mA					
Typical Junction Capacitance <sup>(1)</sup>	C <sub>j</sub>	110		80						pF				
Typical Thermal Resistance <sup>(2)</sup>	R <sub>θJA</sub>	100							°C/W					
Operating Junction Temperature Range	T <sub>j</sub>	-55 ~ +125							°C					
Storage Temperature Range	T <sub>stg</sub>	-55 ~ +150							°C					

(1) Measured at 1 MHz and applied reverse voltage of 4 V.D.C


(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.




**RoHS**  
COMPLIANT




**Fig.1 Forward Current Derating Curve**

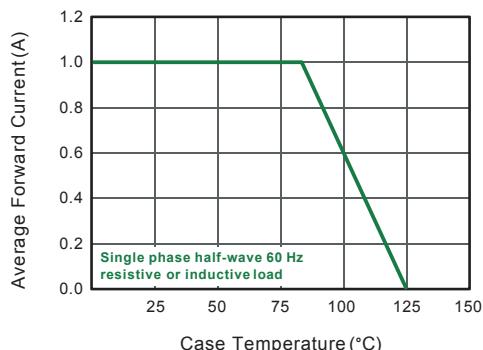


**Fig.2 Typical Reverse Characteristics**

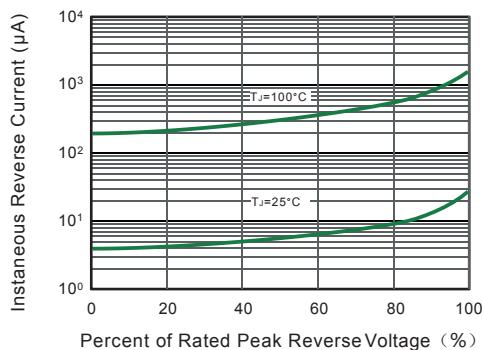


**Fig.3 Typical Forward Characteristic**

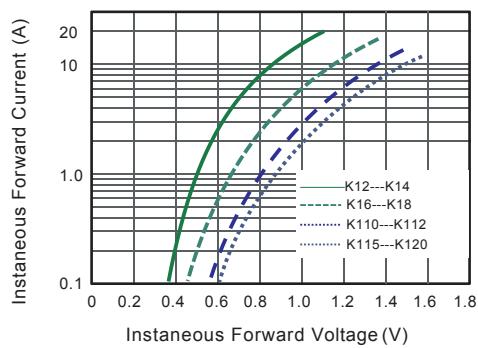


**Fig.4 Typical Junction Capacitance**

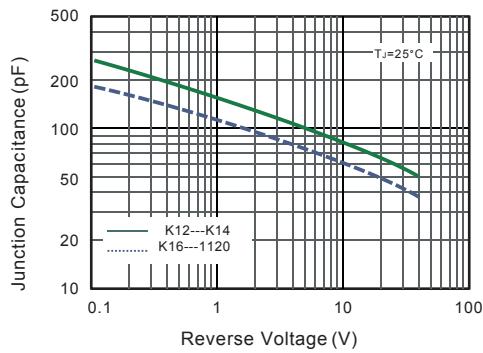

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

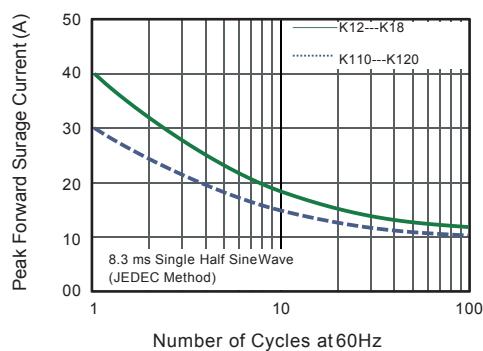

**Fig.6- Typical Transient Thermal Impedance**

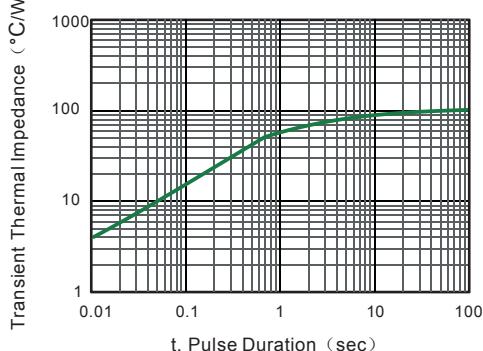




**RoHS**  
COMPLIANT



## PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-123FL

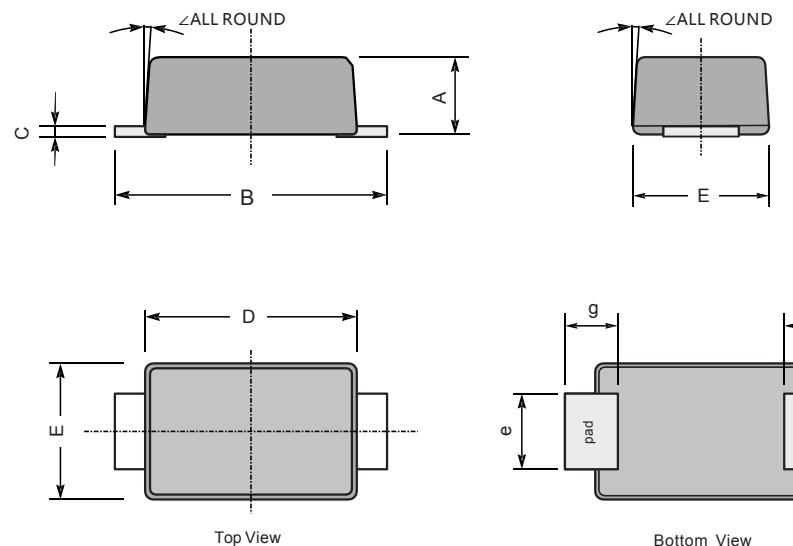

UNIT		A	C	D	E	e	g	B	$\angle$
mm	max	1.15	0.20	2.9	1.9	1.2	0.9	3.8	$5^\circ$
	min	0.95	0.12	2.6	1.7	0.9	0.7	3.5	
mil	max	45	7.9	114	75	47	35	150	$5^\circ$
	min	37	4.7	102	67	35	28	138	

### The recommended mounting pad size

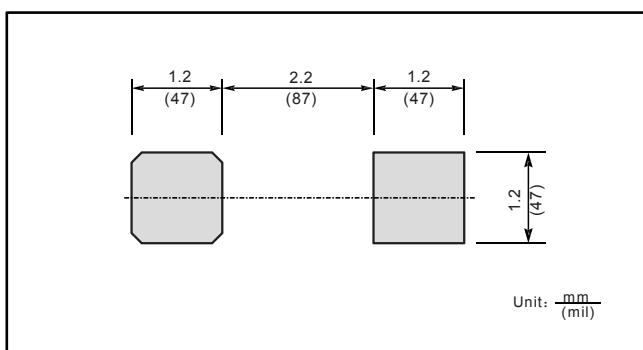

### Marking

Type number	Marking code
K12	K12
K14	K14
K16	K16
K18	K18
K110	K110
K112	K112
K115	K115
K120	K120